

AN7465K/S



FM Noise Canceller/Stereo Multiplex Demodulator for Car Radio

■ Description


The AN7465K/S are the monolithic integrated circuits for car stereo configured FM noise canceller and PLL multiplex demodulator in a single chip.

■ Features

- HPF/LPF of noise canceller input section built-in
- Good S/N and distortion due to use of quasi sine wave as pilot canceller negative wave
- HPF band auto switching by monaural and stereo
- With ASC/ATC functions reducing noise at weak electric field smoothly
- With forced monaural and VCO stop

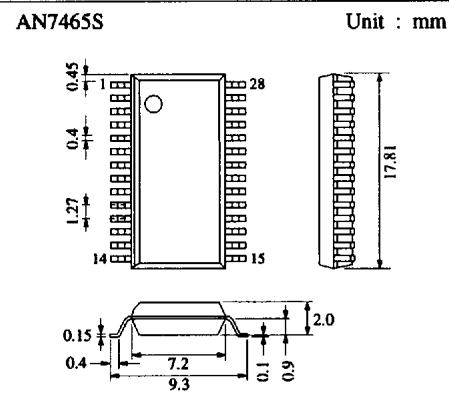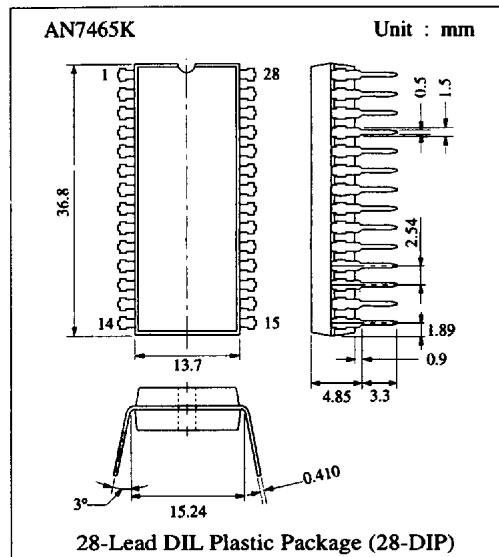

■ Block Diagram

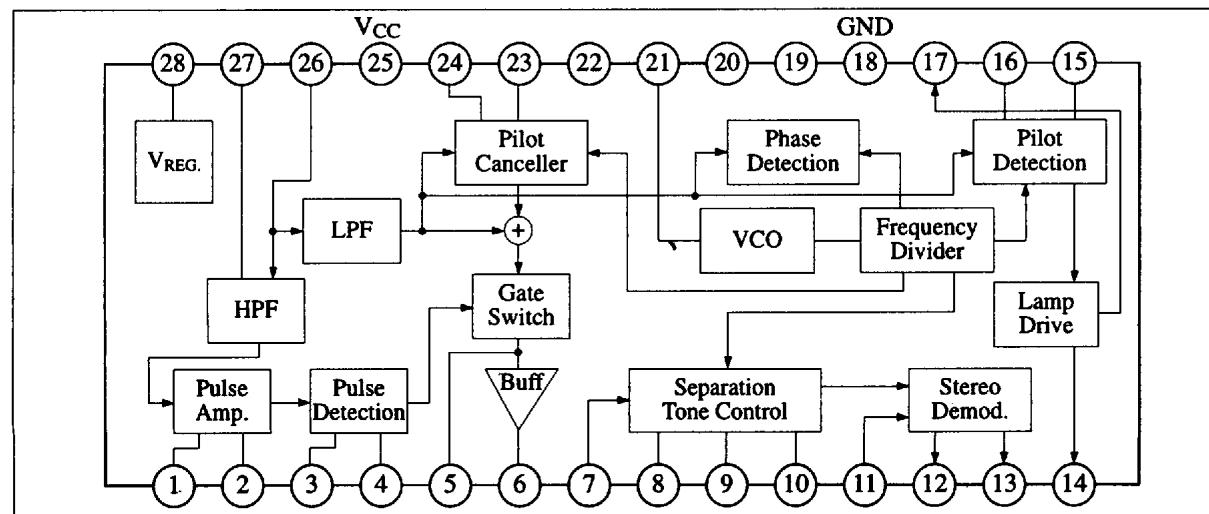

■ Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Supply Voltage	V _{CC}	10	V
Supply Current (Without Lamp)	I _{CC(1)}	25	mA
Supply Current (With lamp)	I _{CC(2)}	30	mA
Power Dissipation	P _D	280	mW
Operating Ambient Temperature	T _{opr}	-30 ~ +75	°C
Storage Temperature	T _{stg}	-55 ~ +125	°C


Operating Supply Voltage Range: V_{CC} = 6.0V ~ 10.0V

■ Electrical Characteristics (Ta=25°C)

Item	Symbol	Condition	min.	typ.	max.	Unit
Total Circuit Current	I _{tot}	V _{in} = 0mV	10	15	20	mA
AGC Voltage (1)	V _{AGC1}	V _{in} = 0mV, R _s = 10kΩ		0.05	0.4	V
AGC Voltage (2)	V _{AGC2}	V _{in} = 2mV, f = 150kHz	1	1.3	1.5	V
Noise Detection Voltage	V _{DET}	V _{in} = 100mV, f = 150kHz		0.05	0.3	V
Gate Pulse Width	PW	V _{in} = 0.3V _{p-p} Pulse, t _w = 1μs, f = 1kHz	20	25	30	μs
Residual Noise Voltage	V _{NR*}	V _{in} = 1V _{p-p} Pulse*, t _w = 10μs, f = 1kHz		0.3	0.7	mV
Output Voltage	V _O	V _{in} = 300mV, f = 1kHz	250	290	330	mV
Channel Balance	CB	V _{in} = 300mV, f = 1kHz		0	1	dB
Separation (1) (R9 = 820Ω fixed)	Sep ₁	V _(L+R) = 270mV, V _p = 30mV, f = 1kHz	22	32		dB
Separation (2) (at R9 adjustment)	Sep ₂	At V _(L+R) = 270mV, V _p = 30mV, f = 1kHz, Adjustment		40		dB
Total Harmonic Distortion (Stereo)	THD	V _(L+R) = 270mV, V _p = 30mV, f = 1kHz		0.05	0.3	%
Total Harmonic Distortion (Mono)	THD	V _{in} = 300mV, f = 1kHz		0.05	0.3	%
Residual Pilot Voltage	V _{PC}	V _p = 30mV		2.5	10	mV
Lamp ON Pilot Voltage	V _{p(ON)}	Input only Pilot Signal	11	16	21	mV
Lamp OFF Pilot Voltage	V _{p(OFF)}	Input only Pilot Signal		8		mV
Capture Range	CR	V _p = 30mV	±1.8	±3		%
VCO Stop Voltage	V ₁₄₋₁₈	Pin 14, VCO Stop Voltage	3	3.4	3.8	V
Maximum Input Voltage	V _{in(max)}	f = 1kHz, Input at lamp ON	0.7			V
Input Impedance	Z _{in}	Pin 26		53		kΩ
Output Impedance	Z _O	Pin 12, 13		3.3		kΩ

* Input through LPF of R = 150Ω, C = 0.033μF

■ Application Circuit

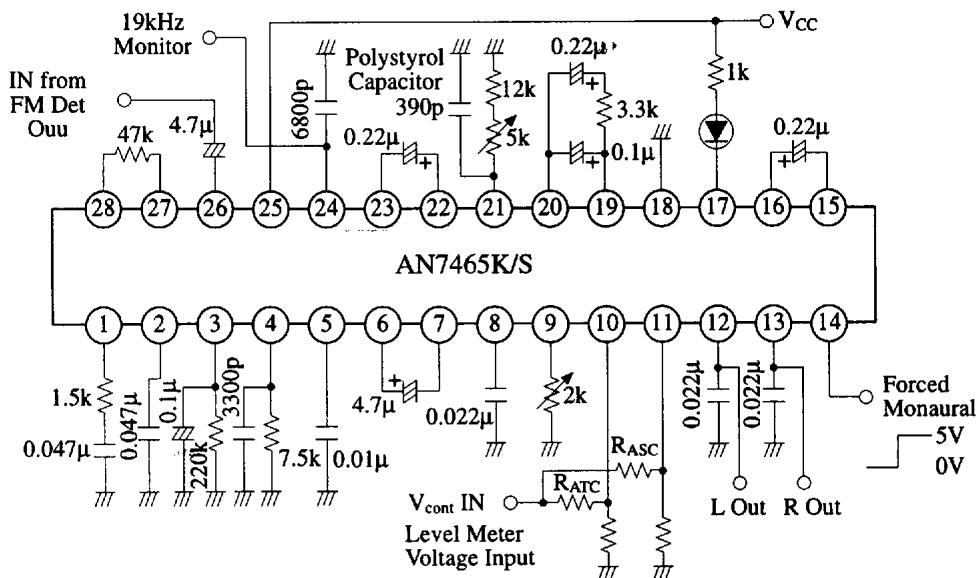


Note: R_{ATC} and R_{AASC} must be determined by size of level meter.
When user use half-fixed VR; use $100\text{k}\Omega$

■ Pin Descriptions

Pin No.	Pin Name	Pin Waveform, Voltage	I/O Impedance	Equivalent Circuit
1	AGC Amp. LPF	— 2.5V	$6.2\text{k}\Omega$	
2	Pulse Amp. LPF	— 1.8V	$2.7\text{k}\Omega$	
3	Noise Amp. AGC	0V — 2.5V Noise level	At charge ... $15\text{k}\Omega$ At discharge ... High	
4	Gate Time Adj.	0V — $2.5V_{max}$ Normal	Usually High Low at operation	
5	NC. Hold	$V_{(AC)} = V_{in} - V_p$ $V_{(DC)} \approx 2.5\text{V}$	$1.5\text{k}\Omega$	
6	NC. OUT		$1\text{k}\Omega$	
7	MPX. IN	$V_{(AC)} = V_{in} - V_p$ DC 1.2V	$33\text{k}\Omega$	




■ Pin Descriptions (Continue)

Pin No.	Pin Name	Pin Waveform, Voltage	I/O Impedance	Equivalent Circuit																				
8	ATC LPF	High level down $V_{(DC)} \approx 1.9V$	5.1kΩ																					
9	Separation Adj.	$DC_{(max)} \approx 1.2V$ AC = 0 ~ V_T	2kΩ																					
10	ATC	Input level meter output voltage	High																					
11	ASC	Input level meter output voltage	High																					
12	L-ch. OUT		3.3kΩ																					
13	R-ch. OUT		3.3kΩ																					
14	ST/MONO Control	<table border="1" data-bbox="554 1075 835 1214"> <tr> <th>Pin Voltage</th> <th>Demod.</th> <th>LED</th> <th>Pilot Can.</th> <th>VCO</th> </tr> <tr> <td>0~1V</td> <td>O</td> <td>O</td> <td>O</td> <td>O</td> </tr> <tr> <td>1.7~3.2V</td> <td>X</td> <td>X</td> <td>O</td> <td>O</td> </tr> <tr> <td>3.9~V_{CC}</td> <td>X</td> <td>X</td> <td>X</td> <td>X</td> </tr> </table>	Pin Voltage	Demod.	LED	Pilot Can.	VCO	0~1V	O	O	O	O	1.7~3.2V	X	X	O	O	3.9~V _{CC}	X	X	X	X	High	
Pin Voltage	Demod.	LED	Pilot Can.	VCO																				
0~1V	O	O	O	O																				
1.7~3.2V	X	X	O	O																				
3.9~V _{CC}	X	X	X	X																				
15	Pilot Detection LPF	DC ≈ 2.5V	≈ 14kΩ																					
16	Pilot Detection LPF	DC ≈ 2.5V	≈ 14kΩ																					
17	LED Driver	At Stereo DC ≈ 0.7V ~ 1V	Low																					
18	GND	0V	Low																					
19	PLL LPF	DC 2.5V	≈ 11kΩ																					
20	PLL LPF	DC 2.5V	≈ 11kΩ																					


■ Pin Descriptions (Continue)

Pin No.	Pin Name	Pin Waveform, Voltage	I/O Impedance	Equivalent Circuit
21	VCO RCC Time Constant		1.2kΩ	
22	Pilot Canceller Control LPF	DC 2.5V	$\approx 100\text{k}\Omega$	
23	Pilot Canceller Control LPF	DC 2.5V	$\approx 100\text{k}\Omega$	
24	Pilot Canceller Quasi Sine			
25	V _{CC}	DC 8V	Low	
26	NC. IN		56kΩ	
27	NC. HPF	Low level down DC is determined by external voltage (2.5V)	High	
28	V _{REF}	2.5V constant voltage	Low	


■ Characteristics Curve

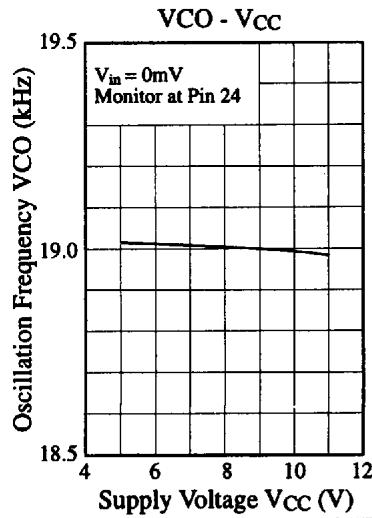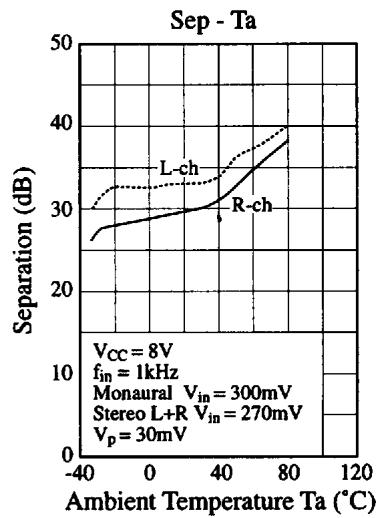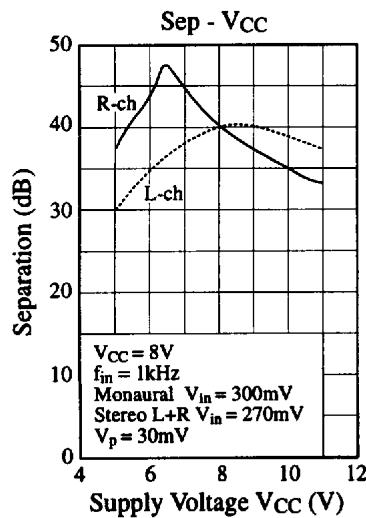


■ Characteristics Curve (Continue)

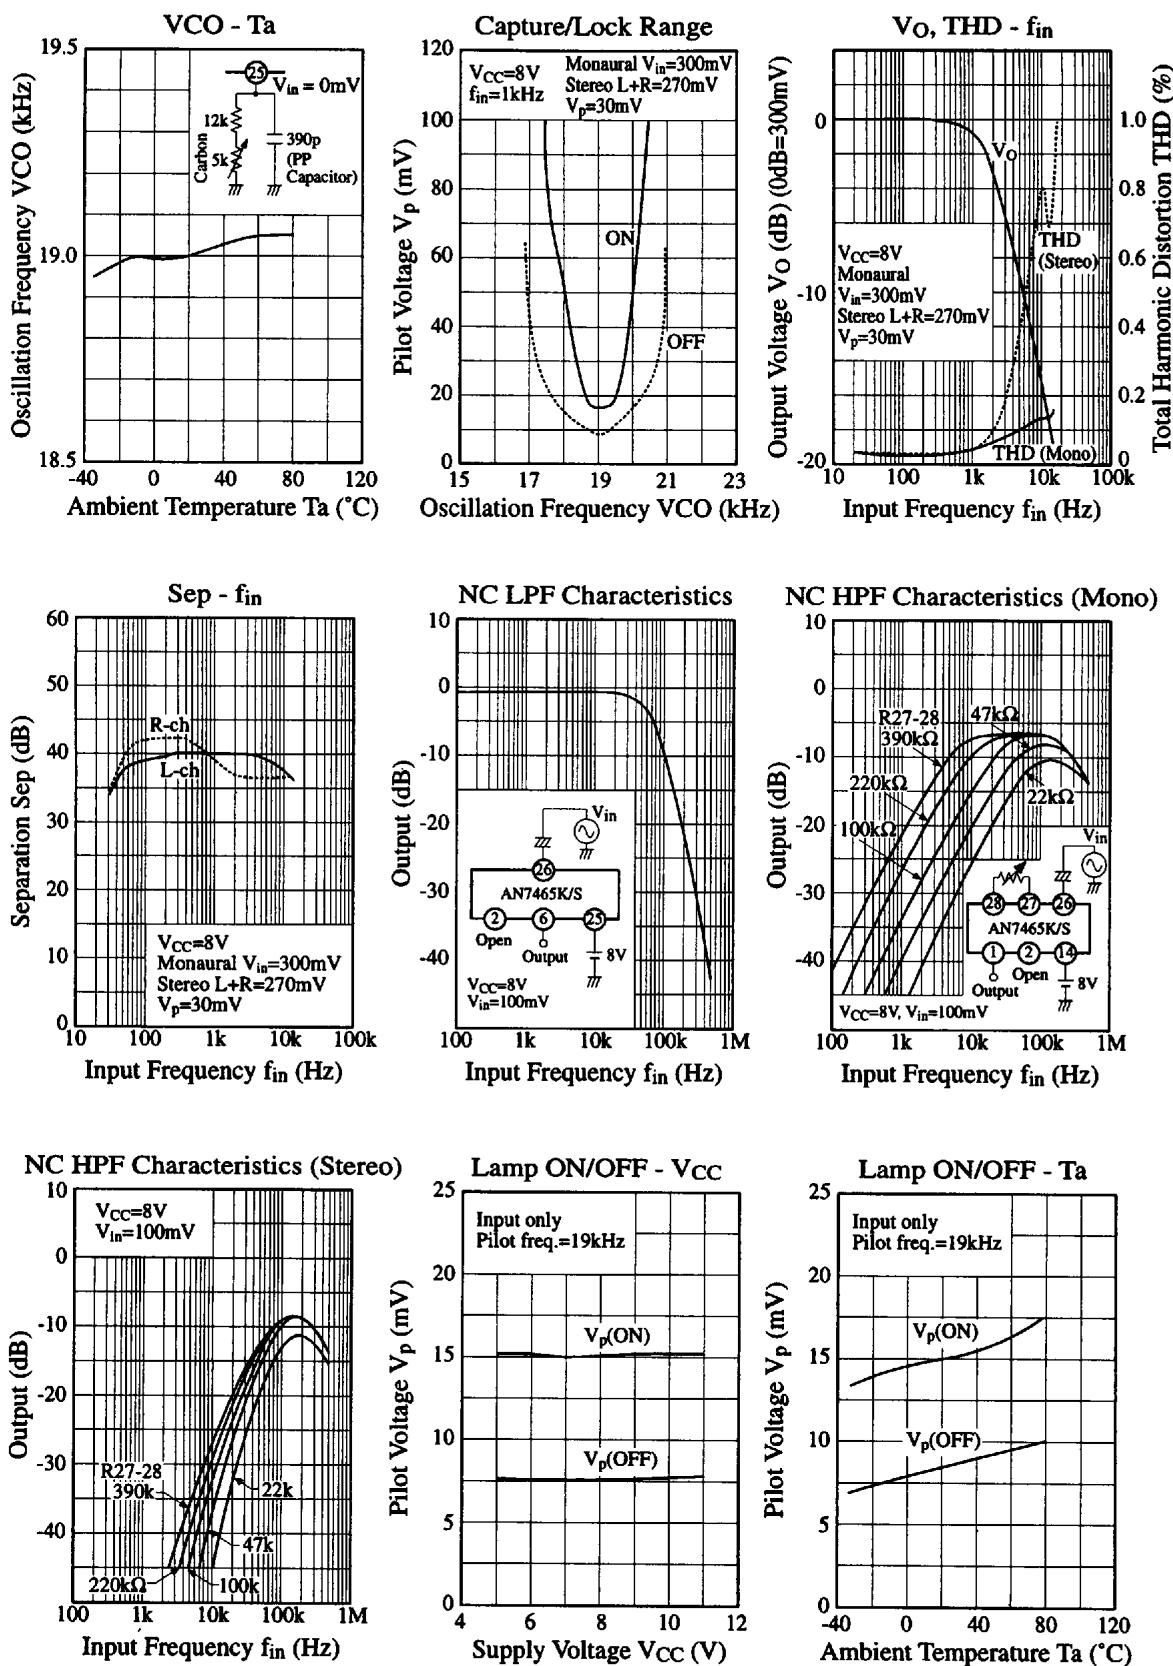

■ Characteristics Curve (Continue)

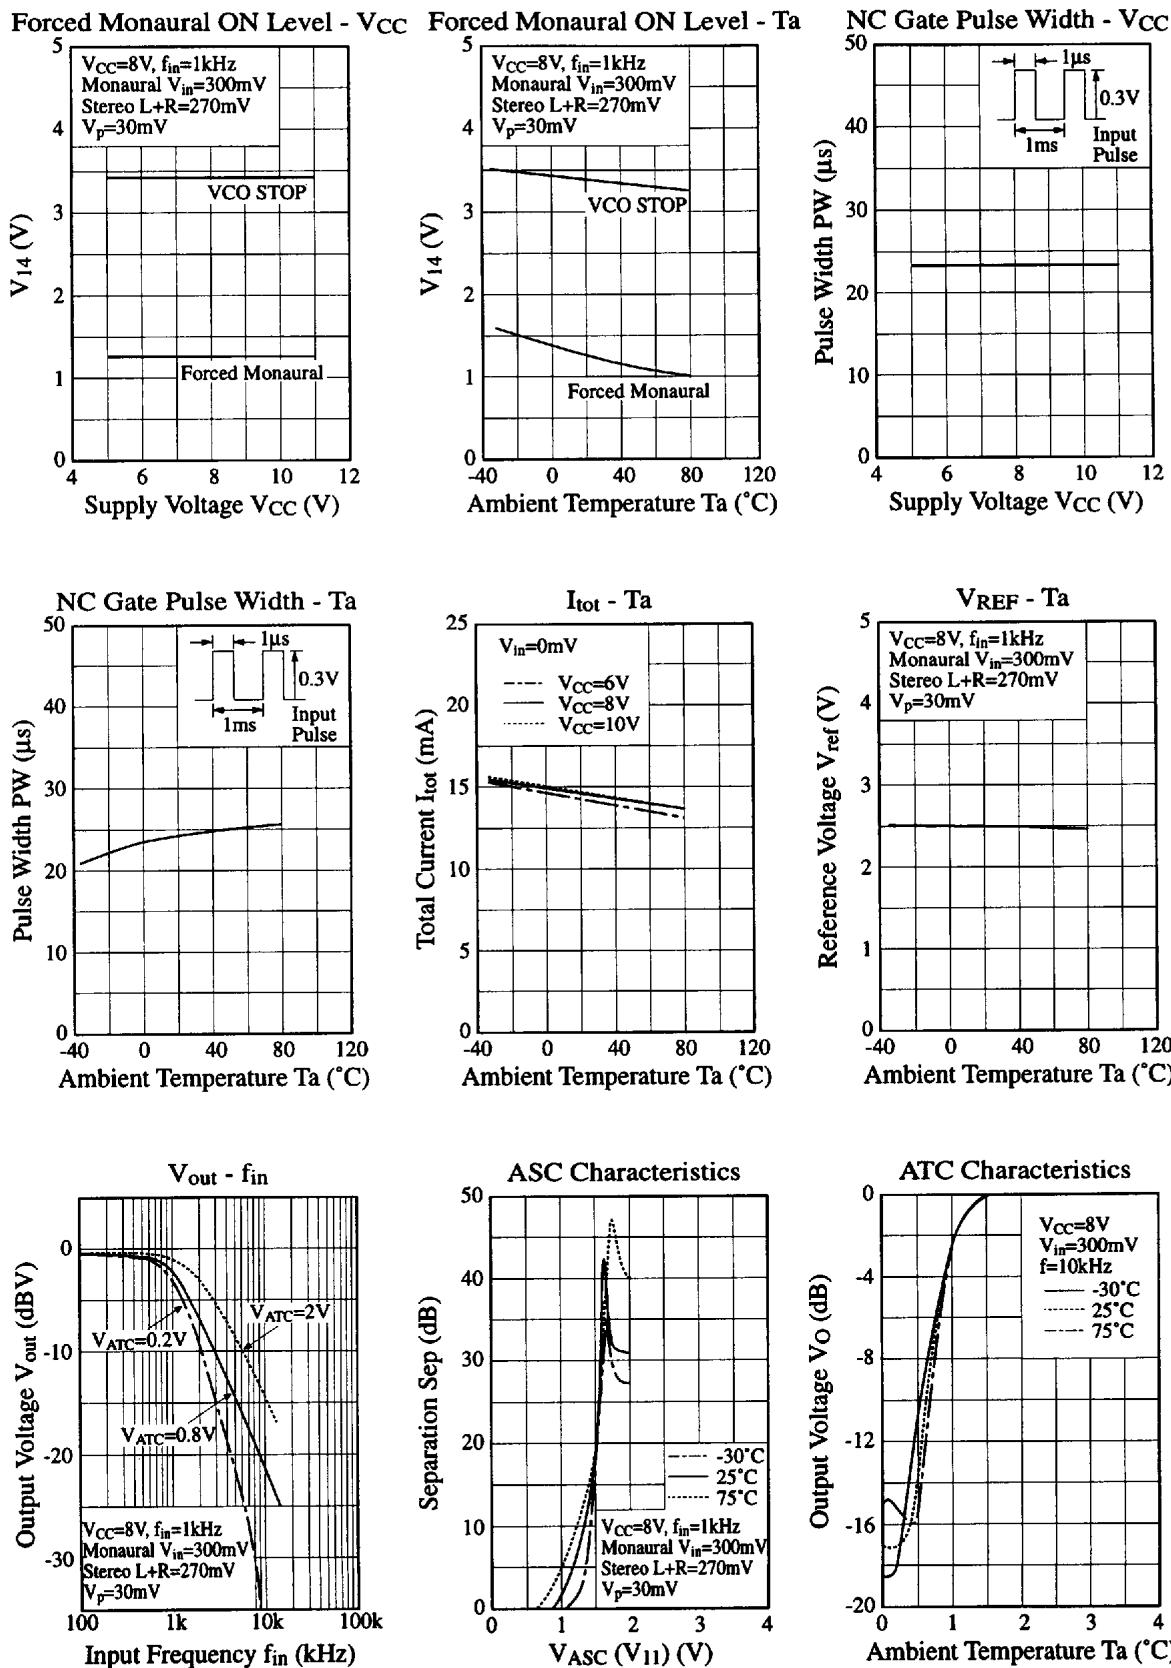

■ Characteristics Curve (Continue)

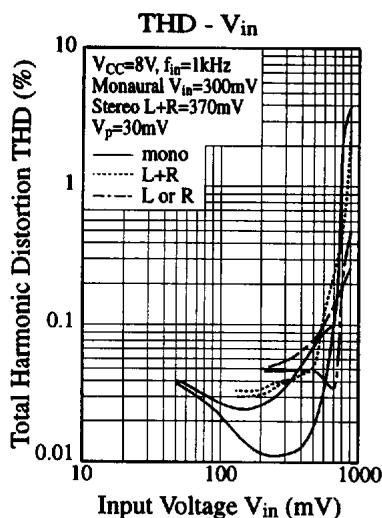

■ Supplementary Explanation

● Selection Standard of Noise Canceller Resistance Value

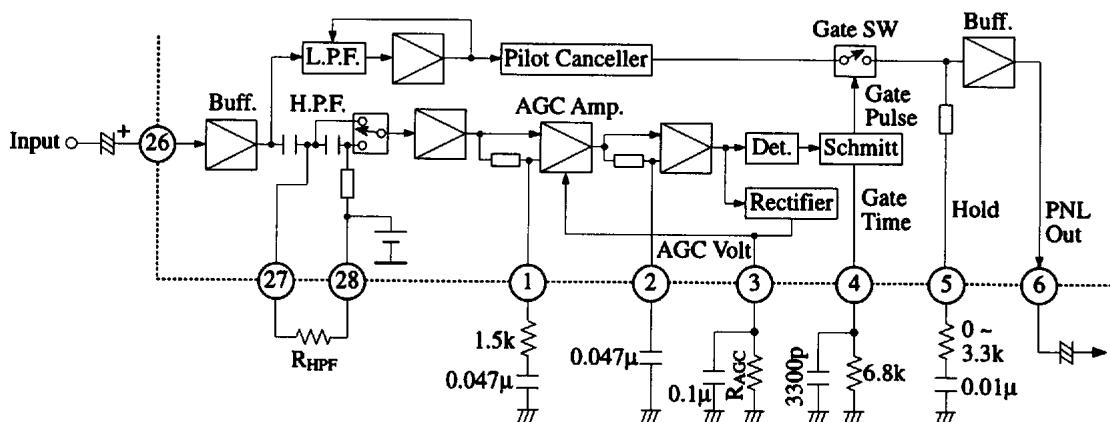


Fig. 1 Pulse Noise Eliminator (PNL) Block Diagram

(1) Relation to field strength

1. In weak electric field where noise is apt to increase, the AGC effectively controls the PNL operation.
 - (a) In case operation error is frequently caused by white noise
Suitably increase the value of Pin 3 R_{AGC}. ($220k\Omega \sim 1M\Omega$)
 - (b) In case operation error is frequently caused by overmodulation
Suitably increase the value of R_{HPPF} between Pin 27 and Pin 28. ($47k\Omega \sim 470k\Omega$)
2. In medium to strong electric field relatively free from noise generation, the AGC becomes less effective and noise is detected almost at the maximum sensitivity.
 - (a) In case the detection sensitivity is too high
Suitably decrease the value of R_{HPPF} between Pin 27 and Pin 28. ($10k\Omega \sim 47k\Omega$)
3. In every electric field
 - (a) In case the detection sensitivity is excellent but the PNL effect deteriorated due to holding level fluctuation by noise, suitably increase the resistance value of the resistor connected in series with the Pin 5 holding capacitor. ($1k\Omega \sim 3.3k\Omega$)
 - (b) In case noise of the gate pulse itself is conspicuous, suitably narrow the gate pulse width by decreasing the resistance value of the Pin 4 resistor. ($3k\Omega \sim 6.8k\Omega$)

■ Supplementary Explanation (Continue)

(2) Selection of AGC Resistor R_{AGC} Pin 3

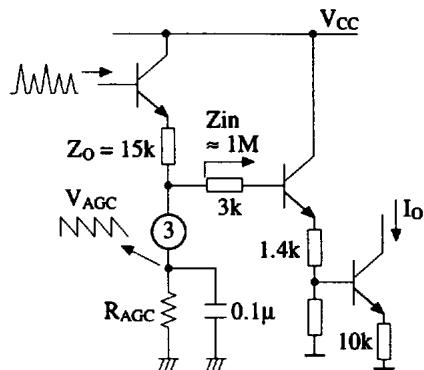



Fig. 2

Pin 3 is the AGC LPF, and enables AGC effective level adjustment. The equivalent circuit in the vicinity of this pin has been so constituted as shown in Fig. 2, and the output impedance at the charging time is $15\text{k}\Omega$ while the input impedance at the discharging time is about $1\text{M}\Omega$.

The standard value of R_{AGC} is 220Ω , but in case operation error is frequently caused in weak electric field by white noise, selectively increase the value of R_{AGC} to a suitable level between $200\text{k}\Omega$ and $1\text{M}\Omega$.

So long as the value of R_{AGC} was properly increased, the AGC voltage proportionally becomes higher to prolong the discharging time constant, and the rate of operation error sharply drops with decrease of the gain of the AGC Amp. (Through Pin 3, the noise components are put to peak (envelope) detection. Even if the value of R_{AGC} was increased, the charging time and voltage remain almost unchanged because $Z_0 = 15\text{k}\Omega$.)

(3) Selection of HPF Resistor R_{HPF} Pin 27

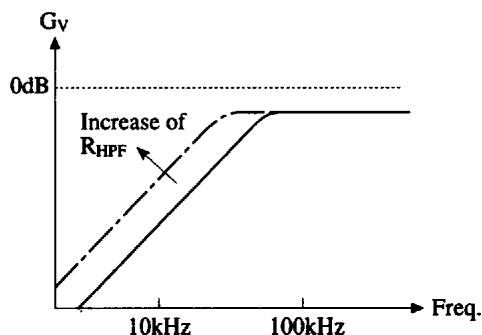

When the resistance value R_{HPF} of the resistor between Pin 27 and Pin 28 was increased, the cut-off frequency of the HPF proportionally becomes lower. The standard value of R_{HPF} is $47\text{k}\Omega$, but in case operation error is frequently caused in a weak electric field by white noise at the modulation time or non-modulation time, selectively increase this R_{HPF} to a suitable value not exceeding $470\text{k}\Omega$.