

A	Dept	Qty
	DC	1
	ED	1
	IE	1
	ISO	1
	PD	1
	R&D	1
B	SD	1
	QA	1
	QC	1
	QE	1

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms)
For 1 Minute.
4. Current Rating:9A.
5. Voltage Rating:600V AC/DC.
6. Temperature: -25°C~+85°C.

Materials:

Contact:
 T-DS1073-02 - X C X 0 0

- Contact Plating
 6: Tin
 8: Full gold flash
- Contact type
 P: Male
 S: Female


Housing:
 I-DS1073-02 - X C T 0 X

- No. of contact
 2x2-2x12
 3x2-3x12
- Housing type
 P: Male
 S: Female

male contact

0.2

9.0

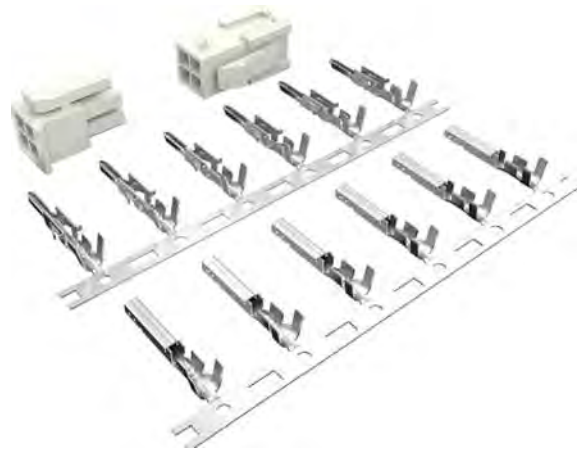

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD