



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


A	
B	
C	
D	
E	
F	
G	
H	

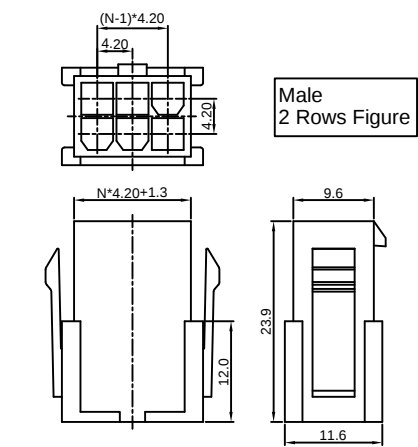


Male
2 Rows Figure

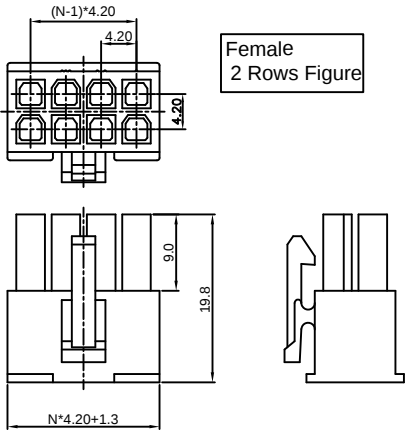


Female
2 Rows Figure

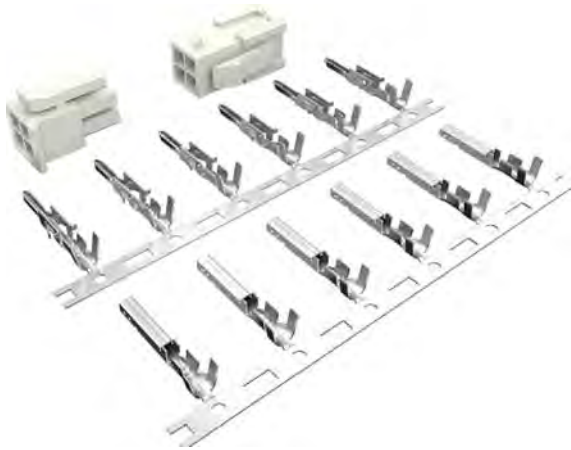

(Series Image-Reference Only)

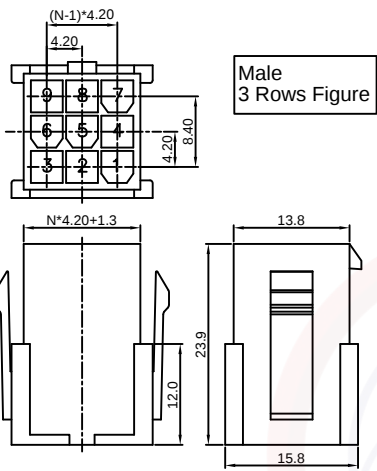


Male
3 Rows Figure

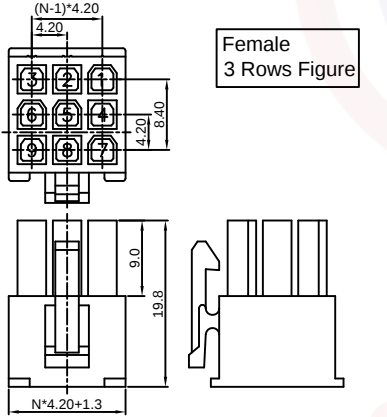


Female
3 Rows Figure

Male contact

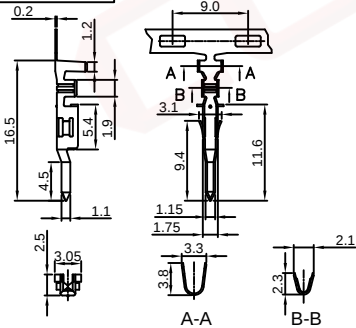

Female contact

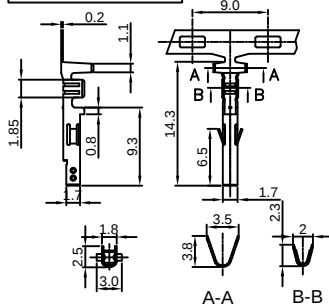

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/15/07'		LJC 12/15/07'
C	DRAWING UPDATE	JLZ 09/11/20'		

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 1000V AC(rms) For 1 Minute.
4. Current Rating:9A.
5. Voltage Rating:600V AC/DC.
6. Temperature: -25°C~+85°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Tin Plated.
3. Insulator Materials: Nylon66,Transparent.

Product Number Code:

Contact:

T-DS1073-02 - X C X 0 0

- Contact Plating
- 6: Tin
- 8: Full gold flash
- Contact type
- P: Male
- S: Female

Housing:

I-DS1073-02 - X C T 0 X

- No.of contact
- 2x2-2x12
- 3x2-3x12
- Housing type
- P: Male
- S: Female

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X. ±0.60		X. ±5°		UNITS	mm	4.2mm Connector Crimp Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°				SERIES DS1073-02 SERIES
DRAWING TYPE	CUSTOMER			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1073-02-XXXXX-C					