

Specifications:


Current Rating: 0.5A AC/DC  
 Voltage Rating: 50V AC/DC  
 Contact Resistance: 100m ohm. max.  
 Insulation Resistance: 1000M ohm. Min.  
 Withstanding Voltage: 500V AC For One Minute  
 Operating Temperature Range: -25°C to + 85°C  
 Materials and Finish:

Insulator: High Temp. Plastic (PPS UL94V-0)  
 Contact: Copper Alloy  
 Plating: Gold Plated in Contact Area and Tin Plated on Solder Tail Over Nickel Plated

How To Order


ICA-501-006-XX

Blank W/Post  
 01: Without Post  
 No. of Positions  
 Sim Card

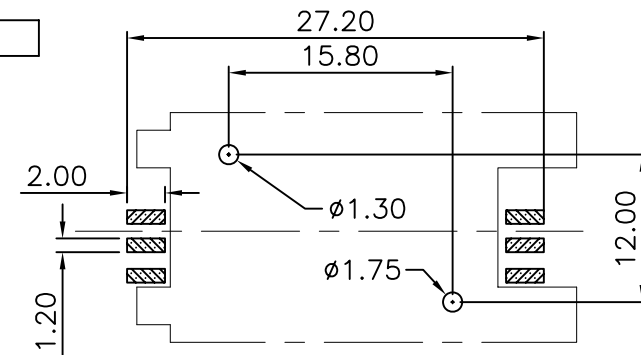

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 <b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>	DESCRIPTION:	SIZE	
E			WXY	.X=±0.20 .XX=±0.15	SIM CARD 06 PINS				<b>A4</b>
D			CHECKED:	UNIT: MM					
C			Jeremy Liu	SCALE: 1:1					
B			APPROVAL:	SHEET: 1 / 1		PART NO:			
A	12-MAY-2008	(PC0001)	WXY	Mike Wu	PROJECTION:	ICA-501-006-TR			
REV	DATE	FILE	BY						