


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/01/11'		

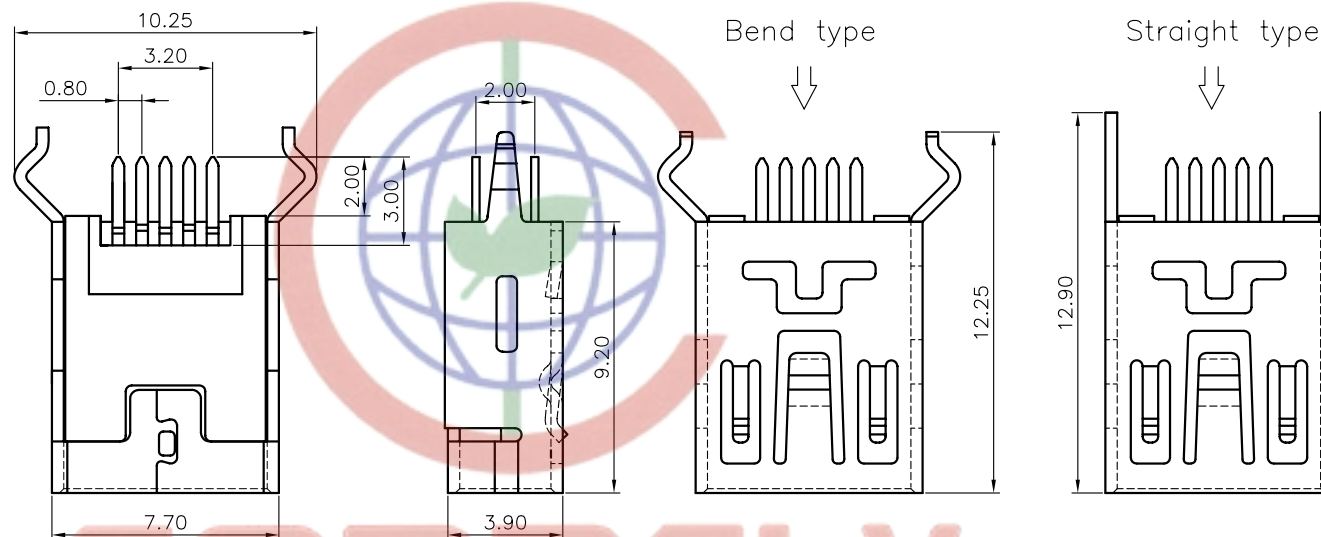

NOTES:

1.SPECIFICATIONS

- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min.
- .TEMPERATURE RANGE: -40°C-+105°C


2.MATERIALS

- .HOUSING: High temperature plastic,UL94 V-0
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.

3.PRODUCT NUMBER CODE:

DS1104-03 - X X X X X

- Packing Type
R: Tape On Reel
B: Tube
T: Tray
- Boardlock type
S: Straight type
B: Bend type
- Contact plating
0: Selective gold flash
C: Selective 3u" gold
- Shell plating
6: Full Matt Tin
N: Full Nickel
8: Full Gold
- Color of housing
B: BLACK

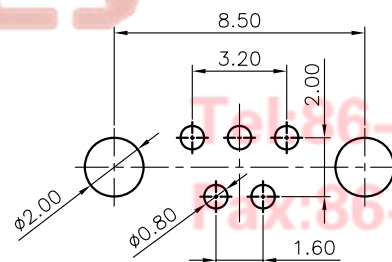

Recommend PCB Layout
Tolerance=±0.05

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MINI USB 5 Positions	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	FEMALE V/T TYPE
.XX	±0.25	.XX	±2°				DS1104-03 SERIES
DRAWING TYPE		CUSTOMER				晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1104-03-XXXXX						