

REVISION RECORD				
REV	ECN	DESCRIPTION	DFT	DATE

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 8A
 - 2.Withstanding voltage : AC1600V/1min.
 - 3.Torque value : M2 , 1.77lb.in
 - 4.Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A


- 2.Torque value : M2 , 0.2N·m
- 3.Wire range : 0.5~1.5mm²

NOTES2:



- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=02~24P
 - 3.Stripping length : 6~7mm
 - 4.Operating temperature: -40℃~+105℃
 - 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Over range		Tolerance	
Over	Over	Over	Over	Over	Over	Over	Over
6	10	30	60	100	150	0.1/10	
TO	TO	TO	TO	TO	TO		
6	10	24	30	60	100	150	≤
							±0.15±0.20±0.30±0.50±0.70±1.00±1.30 ±2°

6.RoHS Compliance

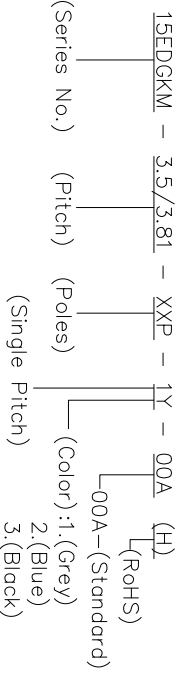

- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

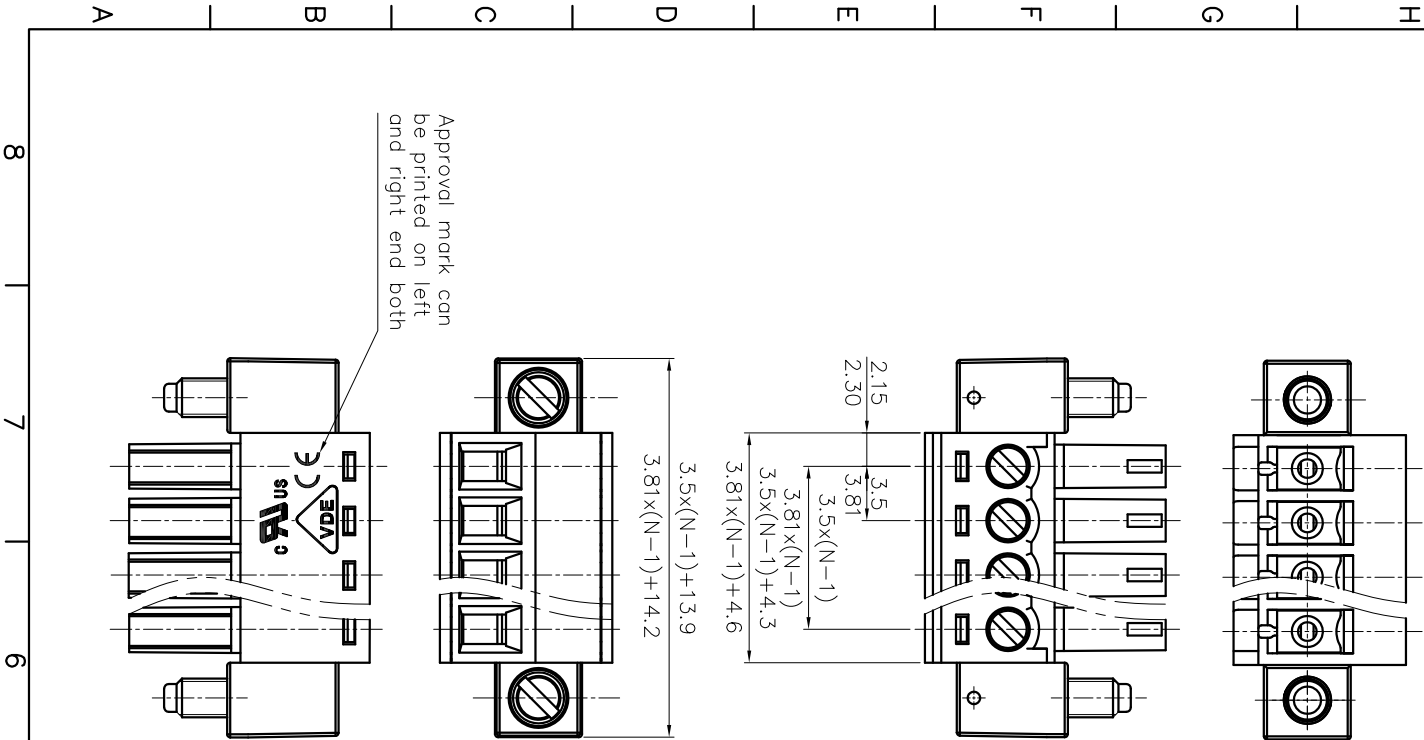

DETACHED LISTS			
PART NO.:	/	NAME:	15EDGKM-3.5/3.81-XXP-1Y-00AH
APPD:	/	CHKD:	/
DFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		1:1	1:1

NINGBO DEGSON ELECTRICAL CO., LTD