REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

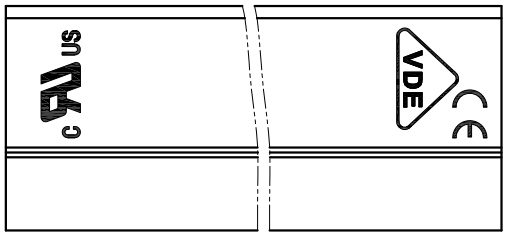

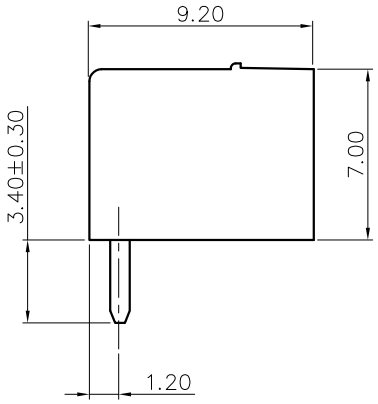

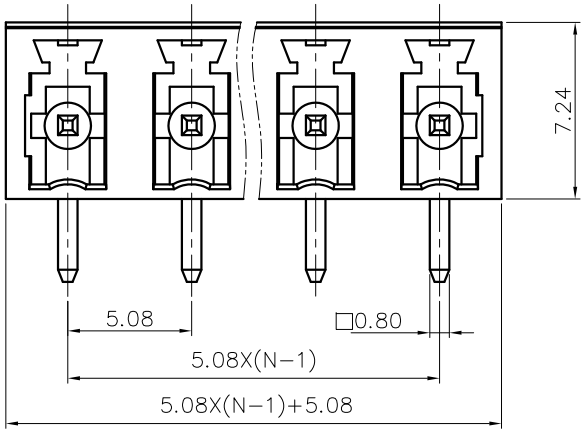

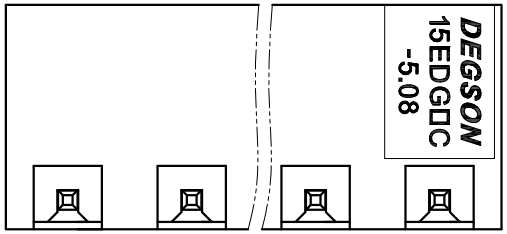

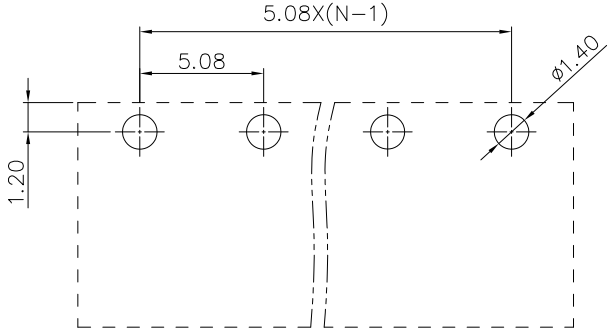

PCB LAYOUT

NOTES1:
UL Standard
1.Rated voltage/current : 300V / 8A
2.Withstanding voltage : AC1600V/1Min.

IEC Standard
1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Pitch : 5.08mm, Poles : N=02~12P
3.Operating temperature: -40°C~+105°C
4.Undimensioned tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					— ⌒ ▱
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
								∠
±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

15EDGRC - 5.08 - XXP - 1Y - 00A (H)
- (Series No.)
- (Pitch)
- (Poles)
- (Single Pitch)
- (Color): 00A-(Standard) 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)
- (RoHS)

DETACHED LISTS	PART NO.: /	DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: 15EDGRC-5.08-XXP-1Y-00A(H)	
	CHKD:		
	DRFT:	TITLE: CUSTOMER DRAWING	REV: D0
	THIRD ANGLE PROJECTION	DRAWING NO.: /	SHEET: 1/1
		MM (INCH) DO NOT SCALE DRAWING	SCALE: 1:1