




• **EMX-2T01 Series**




**FEATURES:**

- Low frequency
- Low voltage
- Small and slim size

**DIMENSIONS: (Unit: mm)**

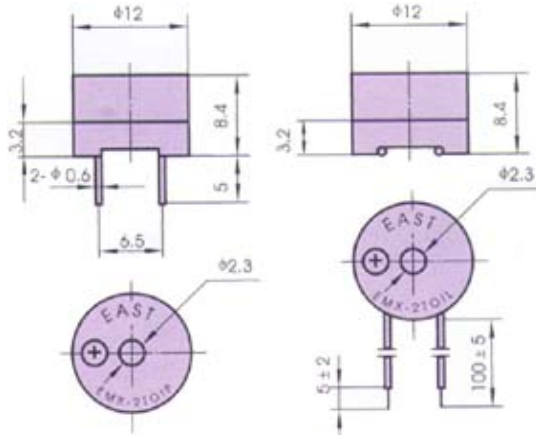

**CHARACTERISTICS:**

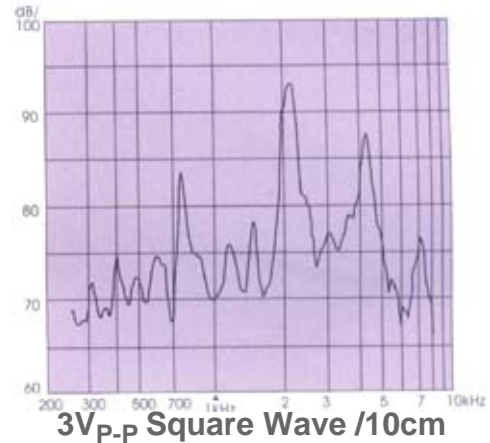

**ELECTRICAL SPECIFICATIONS:**

Model No.	EMX-2T01P50	EMX-2T01P42	EMX-2T01P16	EMX-2T01P8
	EMX-2T01L50	EMX-2T01L42	EMX-2T01L16	EMX-2T01L8
Min. Sound Pressure Level (dB)	80 /1.5V /10cm		85 /1.5V /10cm	
Rated Voltage (V)	1.5			
Operating Voltage (V)	1 ~ 2			
Coil Resistance ( $\Omega$ )	50 $\pm$ 7.5	42 $\pm$ 5	16 $\pm$ 4	8 $\pm$ 2
Coil Impedance ( $\Omega$ )	140	110	40	20
Max. Consumption At 2048Hz/3V <sub>P-P</sub> Square Wave (mA)	10 /1.5V	12 /1.5V	30 /1.5V	60 /1.5V
Resonant Frequency (Hz)	2048			
Operating Temperature ( $^{\circ}$ C)	-20 ~ +70			
Weight (g)	3.3			

**PACKING INFORMATION :**

ii	L-TYPE	P-TYPE
Packing :	3000 pcs per export carton	5000 pcs per export carton
Carton Size :	47 X 30.5 X 25 cm	47 X 30.5 X 25 cm
G. Weight :	12.0 kgs	18.0 kgs
N. Weight :	10.0 kgs	16.5 kgs