| REVISION RECORD | | | | |
|---|---|---|---|---|
| REV | ECN | DESCRIPTION | DRFT | DATE |

8P and 8P following no reinforcement.

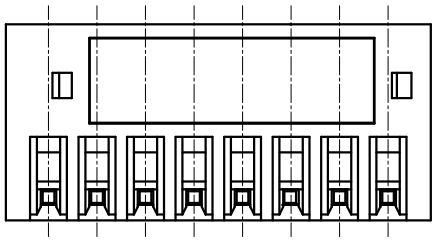

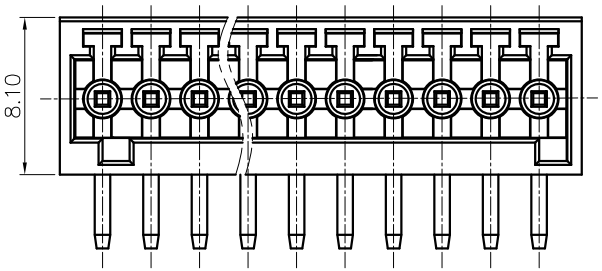


02P






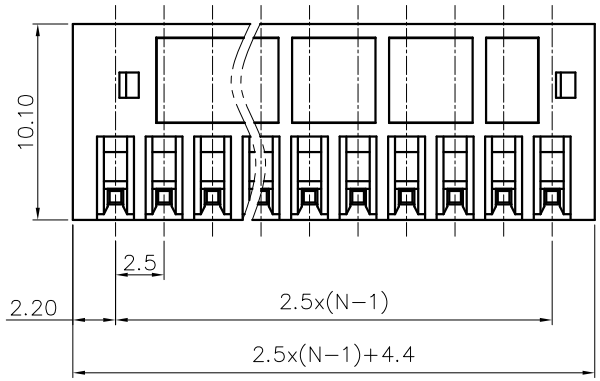





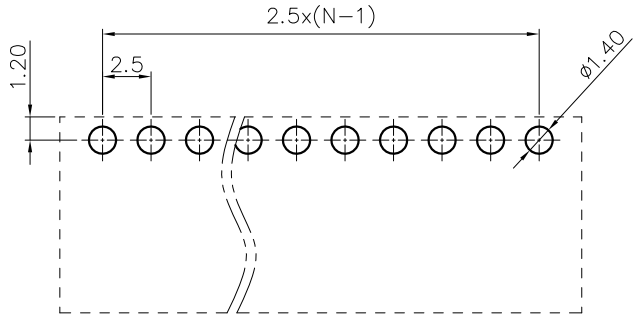


NOTES1:

UL Standard

1.Rated voltage/current : 150V / 4A

2.Withstanding voltage : AC1300V/1Min.

IEC Standard

1.

| | |
|---|---|
| Pollution degree | 2 |
| Overvoltage category | II |
| Rate impulse voltage(KV) | 2.5KV |
| Rate voltage(V) | 250V |
| Rate current(A) | 5A |

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 2.5mm, Poles : N=02~12P

3.Operating temperature: -40℃~+105℃

4.Undimensioned tolerances:

| Pitch range in mm | | | Nominal dimension range in mm | | | | | — ⌒ ▱ |
|---|---|---|---|---|---|---|---|---|
| TO 6 | Over 6 TO 10 | Over 10 TO 24 | TO 30 | Over 30 TO 60 | Over 60 TO 100 | Over 100 TO 150 | Over 150 | 0.1/10 |
| | | | | | | | | ∠ |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±2° |

5.RoHS Compliance

15EDGRC - 2.5 - XXP - 1Y - 00A (H)

(H)-(RoHS)

00A-(Standard)

(Series No.) (Pitch) (Poles)

(Single Pitch)

(Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS

PART NO.: /

APPD: /

CHKD: /

DRFT: /

THIRD ANGLE PROJECTION

DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGRC-2.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING | REV: D0

DRAWING NO.: / | SHEET: 1/1

MM (INCH) | DO NOT SCALE DRAWING | SCALE: 1:1