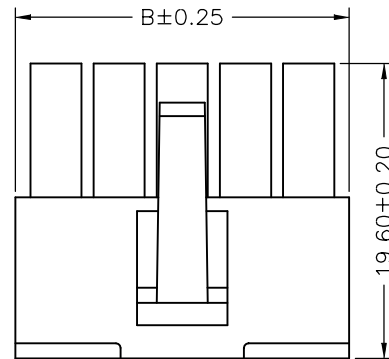
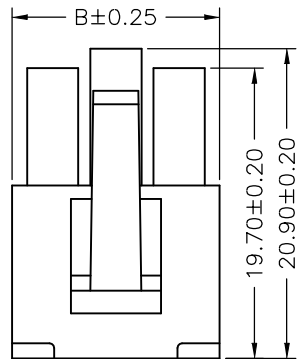
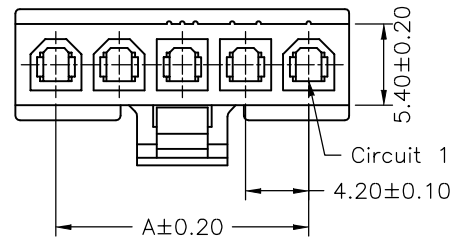

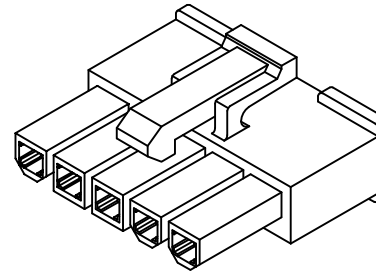



3P

4P,5P

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 or UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MF 1x03F	8.40	13.80
MF 1x04F	12.60	18.00
MF 1x05F	16.80	22.20

RoHS Compliant

DESCRIP TION: **4. 20mm PITCH**
HOUSING-RECEPTACLE,
SINGLE ROW, MINI-FIT

TOLERANCES ARE

.X ±0.2

.XX ±

.XXX ±

AWG