



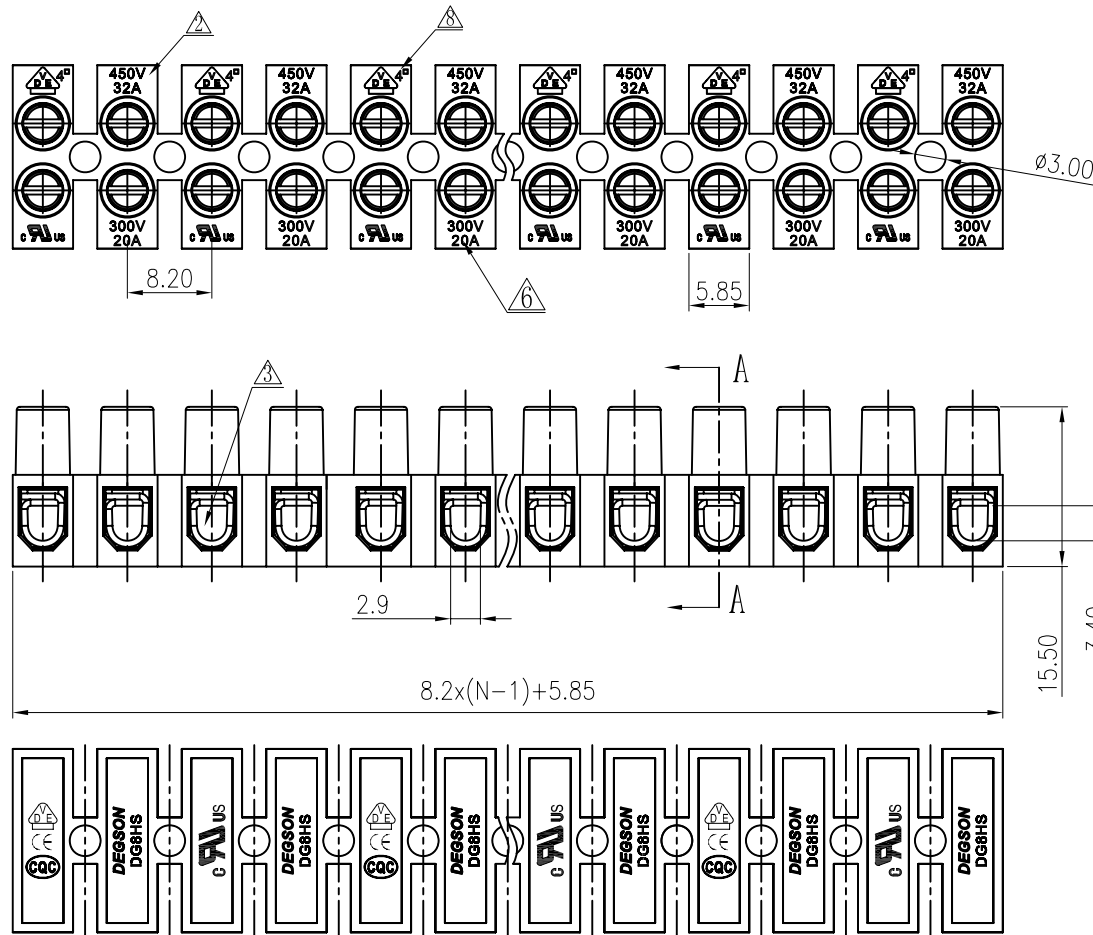

REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		8HS螺丝变更为8H螺丝	LIN	05/13/08
△		VDE额定电流由24A改为32A	Zengy	06/16/08
△		工程变更, 去掉挡线板	Zengy	07/21/08
△		品名中加上塑件底高"1.2"	Zengy	09/03/08
△		修改品名中"10A"为"100A"	LJH	11/06/08
△		修改参数及刻字	LJH	02/12/09
△		结构变更	hyq	06/03/09
△		增加线径刻字	HYQ	08/03/09

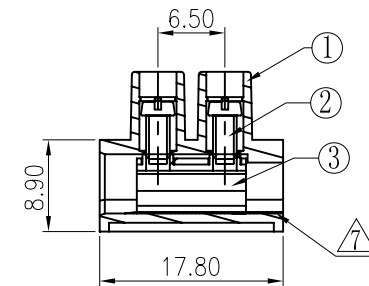

SECTION A-A

Notes:

- Pitch: 8.2mm, Poles: 2-12P
- Rated voltage/current: UL 300V/20A △
VDE 450V/32A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 20~12AWG, 0.5~4.0mm² △
- Max. Torque Value: M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	DG8HS-Current carrier	X000002140 (H)	XX	Steel	Cr ³⁺ Zn	
2	DG8H"— Screws M2.5	S000001110 (H)	XX*2	Steel	Cr ³⁺ Zn	
1	DG8HS-1.2 Housing	2022A0YXXA (H)	1	PA66	UL94V-2	
ITEM		NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)		DFTO L/N	DATE 08/09/07		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFD	DATE		
			APPVL	DATE		
			MATERIAL :			
			NAME			
			DG8HS-1.2-XXP-1Y-100A (H)			
			DRAWING NO. DG8HS-E06			
			/PART NO.			
			SIZE A4			
		REV T8 08/03/09				
ANGLES ± 1°		G.E :				
		FINISH:				
THIRD ANGLE PROJECTION		SCALE : 1:1				
DO NOT SCALE DRAWING			SHEET 1 OF 1			