


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/14/06
△		增加VDE、CE标志	LJH	12/24/07

- Notes:
- 1.pitch: 5.0mm
 - 2.Rated voltage/current:UL 300V/10A
VDE 250V/24A
 - 3.Insulation resistance: 5000M Ω /1000V
 - 4.Withstanding voltage: AC2000V/1Min
 - 5.Wire range: 22-14AWG 2.5mm²
 - 6.Temp,Range: -30° C~+120° C
 - 7.Torque: 5.10kgf.cm
 - 8.Undimensioned Tolerances:

Pitch range in mm		Naminal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
to 6							∩	◇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

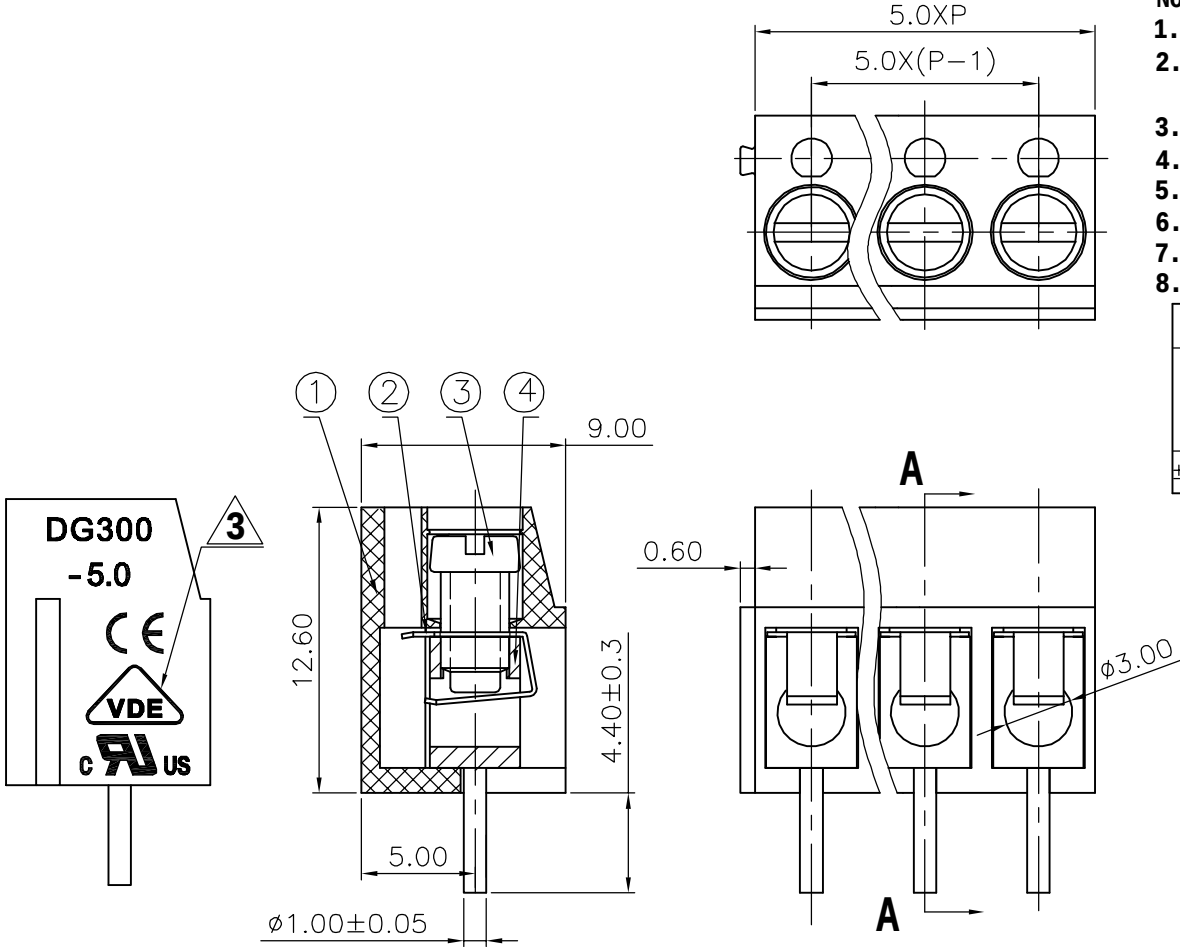

SECTION A-A

4	DG300(A) Pin header	4001800010(H)	XX	Brass	SnCe
3	DG300 Screws	S000001380(H)	XX	Steel	3+ Cr Zn
2	DG300 Spring	X000000230(H)	XX	Stainless steel	

1	DG300-5.0-Housing	4007A0YXXA(H)	1	PBT	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS		DFTO huangwei	DATE 01/27/05	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
ANGLES ± 1°		MATERIAL :		NAME	
		G.E :		DG300-5.0-XXP-1Y-00A(H)	
		FINISH :		DRAWING NO. DG300-5.0-E02	
		SCALE : 1:1		/PART NO.	
		DO NOT SCALE DRAWING		SHEET 1 OF 1	