
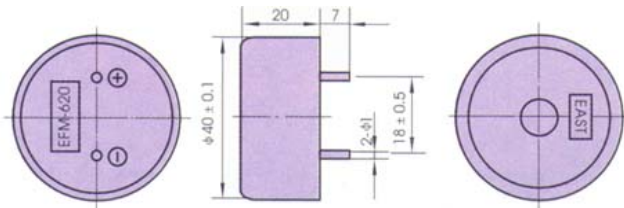


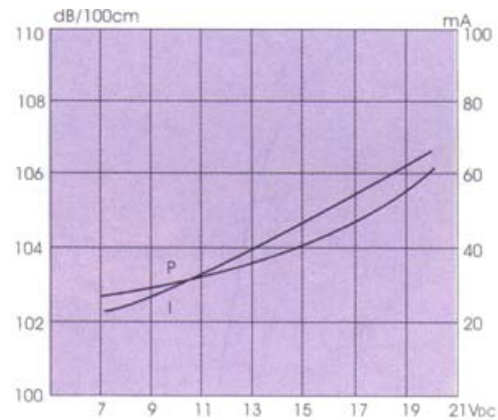

- **EFM-620 (620A)**

**FEATURES:**

- Loud output
- Low current consumption
- High efficiency and reliability
- PCB mounting
- Sealed type

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS :**

Model No.	EFM-620	EFM-620A
Min. Sound Pressure Level (dB)	100 /9V _{DC} /100cm 90 /7.5V _{DC} /300cm	95 /3V _{DC} /30cm
Rated Voltage (V _{DC})	9	3
Operating Voltage (V _{DC})	7 ~ 20	2 ~ 7
Max. Consumption (mA)	50 /9V _{DC}	30 /3V _{DC}
Oscillating Frequency (kHz)	3.2 ± 0.5	
Operating Temperature (°C)	-20 ~ +60	
Weight (g)	12.5	
Case Material/Colour	ABS/Black	

PACKING INFORMATION :

Packing :	600 pcs per export carton
Carton Size :	47 X 30.5 X 35 cm
G. Weight :	10 kgs
N. Weight :	7.5 kgs