

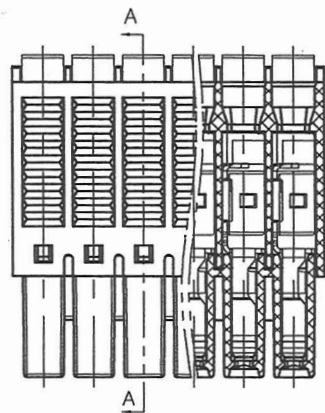
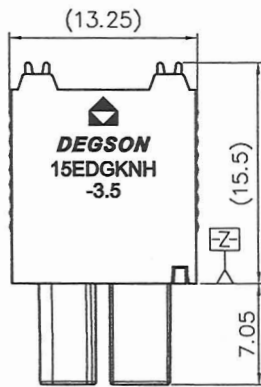



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



SEC B-B

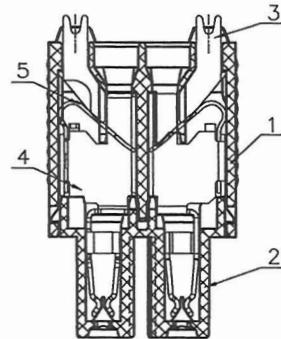

SEC A-A

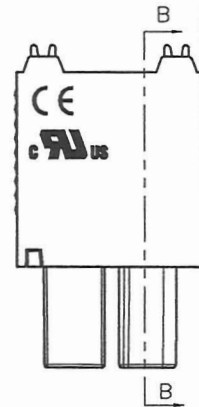

备注一:

UL 标准

1. 额定电压与电流 : 150V / 8A
2. 工频耐压 : AC1500V/1Min.
3. 线径范围 : 26~16AWG

IEC 标准

1. 污染等级	2	2	3
安装类别	II	III	III
额定脉冲电压(KV)	2.5KV	2.5KV	2.5KV
额定电压(V)	250V	160V	160V
额定电流(A)	8A		


2. 线径范围 : 0.2~1.5mm²

备注二:

1. 尺寸标注符合标准 ASME Y14.5-2009
2. P距 : 3.50mm, P数范围 : N=04~48P
3. 剥线长度 : 10.0mm
4. 使用温度范围 : -40°C~+105°C
5. "⊗" 为重点管控尺寸
6. 00A 包装规范:SOP-Y-1251
7. 未注公差表:

P距方向公差(mm)		其他尺寸公差(mm)					
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00
							0.05/10
							<
							±1'

8. 符合RoHS环保要求

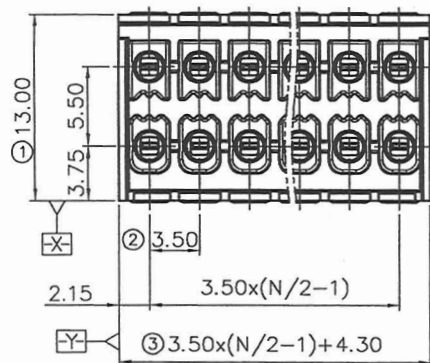

试量产专用
（仅限内部使用，对外无效）

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
5	15EDGKNH-3.5-弹片	X000006520(H)	N	不锈钢	/
4	15EDGKNH-3.5-夹片	1508B00010(H)	N	磷青铜	镀锡
3	15EDGKNH-3.5-按钮	1508DYY01A(H)	N	POM	UL94HB
2	15EDGKNH-3.5-边盖	1508CYYXXA(H)	1	PA66	UL94V-0
1	15EDGKNH-3.5-塑件	1508AYYXXA(H)	1	PA66	UL94V-0

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: Fernando 02/22-16"	NAME: 15EDGKNH-3.5-XXP-1Y-00A(H)			
	CHKD: P6 10/22-16"	TITLE: ASSEMBLY DRAWING			
	DRFT: Ethan 10/20/16"	REV TO-1		SHEET 1/1	
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGKNH-3.5-E01		SCALE 1:1	
		MM (INCH)		DO NOT SCALE DRAWING	