


2N2222 / 2N2222A

NPN Silicon Epitaxial Planar Transistor

for switching and AF amplifier applications.

The transistor is subdivided into one group according to its DC current gain.


On special request, these transistors can be manufactured in different pin configurations.



1. Emitter 2. Base 3. Collector
TO-92 Plastic Package

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	2N2222	60	V
	2N2222A	75	V
Collector Emitter Voltage	2N2222	30	V
	2N2222A	40	V
Emitter Base Voltage	2N2222	5	V
	2N2222A	6	V
Collector Current	I_C	600	mA
Power Dissipation	P_{tot}	625	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$



SEMTECH ELECTRONICS LTD.




Dated : 12/08/2016 Rev:02

2N2222 / 2N2222A

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}$, $I_C = 0.1\text{ mA}$ at $V_{CE} = 10\text{ V}$, $I_C = 1\text{ mA}$ at $V_{CE} = 10\text{ V}$, $I_C = 10\text{ mA}$ at $V_{CE} = 10\text{ V}$, $I_C = 150\text{ mA}$ at $V_{CE} = 10\text{ V}$, $I_C = 500\text{ mA}$	h_{FE} h_{FE} h_{FE} h_{FE} h_{FE} h_{FE}	35 50 75 100 30 40	- - - 300 - -	- - - - - -
Collector Base Cutoff Current at $V_{CB} = 50\text{ V}$ at $V_{CB} = 60\text{ V}$	I_{CBO}	- -	10 10	nA
Collector Base Breakdown Voltage at $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CBO}$	60 75	- -	V
Collector Emitter Breakdown Voltage at $I_C = 10\text{ mA}$	$V_{(BR)CEO}$	30 40	- -	V
Emitter Base Breakdown Voltage at $I_E = 10\text{ }\mu\text{A}$	$V_{(BR)EBO}$	5 6	- -	V
Collector Emitter Saturation Voltage at $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$ at $I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$	$V_{CE(sat)}$	- - - -	0.4 0.3 1.6 1	V
Base Emitter Saturation Voltage at $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$ at $I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$	$V_{BE(sat)}$	- 0.6 - -	1.3 1.2 2.6 2	V
Gain Bandwidth Product at $I_C = 20\text{ mA}$, $V_{CE} = 20\text{ V}$, $f = 100\text{ MHz}$	f_T	250	-	MHz
Collector Output Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	8	pF











SEMTECH ELECTRONICS LTD.



Dated : 12/08/2016 Rev:02

Figure 1. DC Current Gain

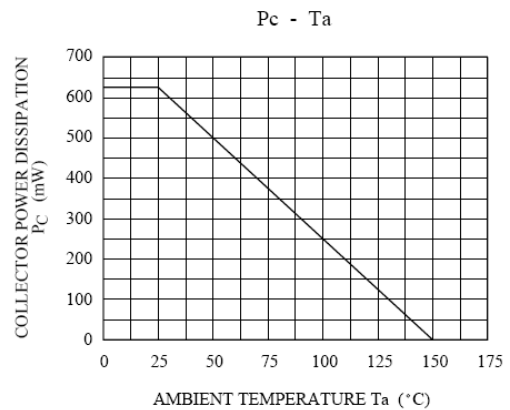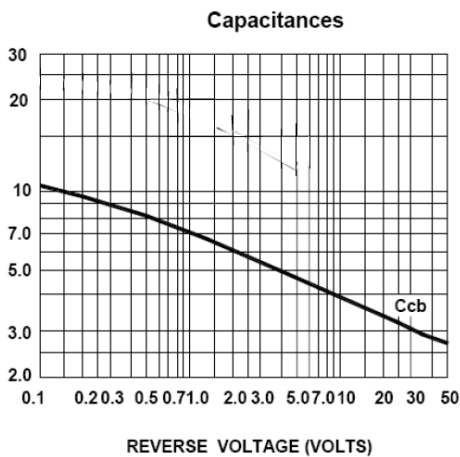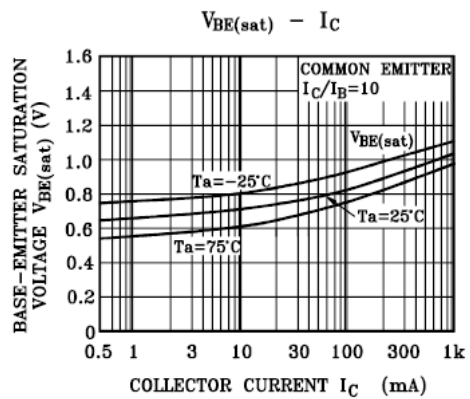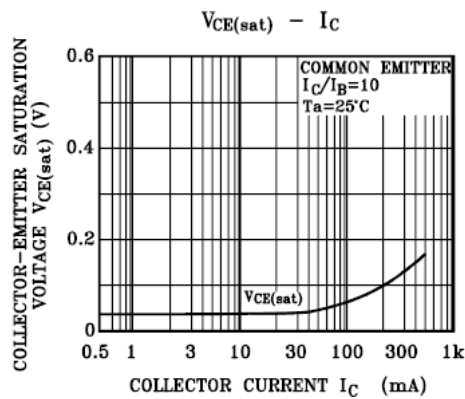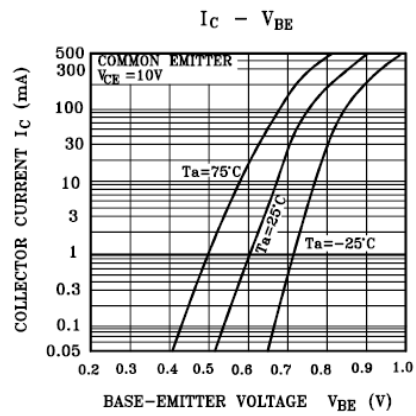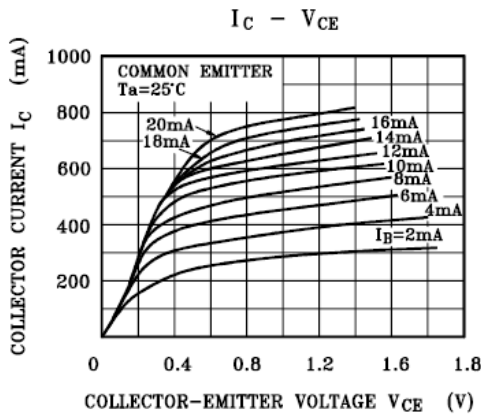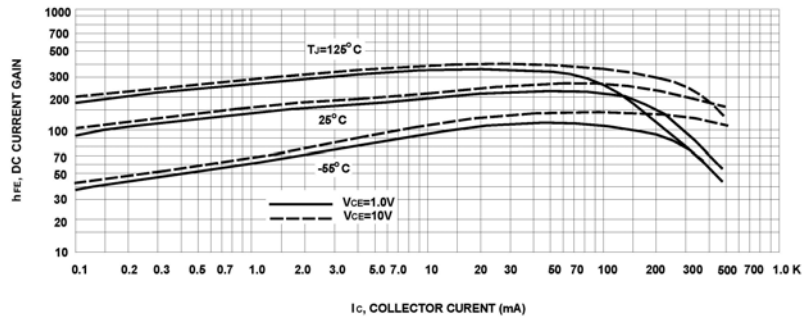

SEMTECH ELECTRONICS LTD.

