


### A Power Relay with Various Models

- High-sensitivity (250 mW) and High-capacity (16 A) Models available.
- Low profile: 15.7 mm max. in height
- Conforms to VDE (EN61810-1), UL508 and CSA22.2.
- Meets EN60335-1 requirements for household products.
- Clearance and creepage distance: 10 mm/10 mm.
- Tracking resistance: CTI>250
- Coil Insulation system: Class F (UL1446)

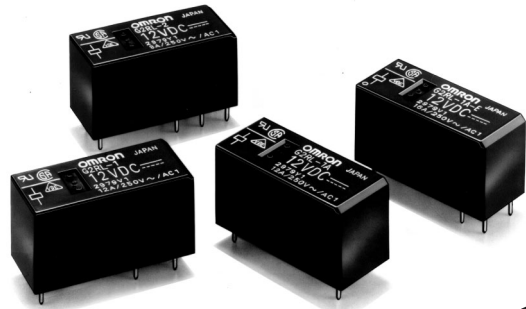

RoHS Compliant

### Ordering Information

Classification	Enclosure ratings	Contact form			
		SPST-NO	SPDT	DPST-NO	DPDT
General-purpose	Flux protection	G2RL-1A	G2RL-1	G2RL-2A	G2RL-2
	Fully sealed	G2RL-1A4	G2RL-14	G2RL-2A4	G2RL-24
High-capacity	Flux protection	G2RL-1A-E	G2RL-1-E	---	---
	Fully sealed	G2RL-1A4-E	G2RL-14-E	---	---
High-sensitivity	Flux protection	G2RL-1A-H	G2RL-1-H	---	---

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G2RL-1A 12 VDC

Rated coil voltage

### Model Number Legend

G2RL-□□□□-□  
1 2 3 4

#### 1. Number of Poles

- 1: 1 pole
- 2: 2 poles

#### 2. Contact Form

- None: □PDT
- A: □PST-NO

#### 3. Enclosure Ratings

- None: Flux protection
- 4: Fully sealed

#### 4. Classification

- None: General purpose
- E: High capacity (1 pole)
- H: High sensitivity (1 pole)

### Specifications

#### ■ Coils Ratings for General-purpose and High-capacity Models

Rated voltage	5 VDC	12 VDC	24 VDC	48 VDC
Rated current	80.0 mA	33.3 mA	16.7 mA	8.96 mA
Coil resistance	62.5 Ω	360 Ω	1,440 Ω	5,358 Ω
Must operate voltage	70% max. of the rated voltage			
Must release voltage	10% min. of the rated voltage			
Max. voltage	180% of rated voltage (at 23°C)			
Power consumption	Approx. 400 mW			Approx. 430 mW

**Note:** The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

## ■ Coils Ratings for High-sensitivity Models

Rated voltage	5 VDC	12 VDC	24 VDC
Rated current	50.0 mA	20.8 mA	10.42 mA
Coil resistance	100 Ω	576 Ω	2,304 Ω
Must operate voltage	75% max. of the rated voltage		
Must release voltage	10% min. of the rated voltage		
Max. voltage	180% of rated voltage (at 23°C)		
Power consumption	Approx. 250 mW		

Note: The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

## ■ Contact Ratings

Item	General-purpose Models		High-capacity Models	High-sensitivity Models
Number of poles	1 pole	2 poles	1 pole	1 pole
Contact material	Ag Alloy (Cd free)			
Load	Resistive load (cosφ=1)			
Rated load	12 A at 250 VAC 12 A at 24 VDC (See note.)	8 A at 250 VAC 8 A at 30 VDC (See note.)	16 A at 250 VAC 16 A at 30 VDC (See note.)	10 A at 250 VAC 10 A at 24 VDC (See note.)
Rated carry current	12 A (See note.)	8 A (70°C)/5 A (85°C) (See note.)	16 A (See note.)	10 A (See note.)
Max. switching voltage	440 VAC, 300 VDC			
Max. switching current	12 A	8 A	16 A	10 A
Max. switching power	3,000 VA (4,000 VA)	2,000 VA	4,000 VA	2,500 VA

Note: Contact your OMRON representative for the ratings on fully sealed models.

## ■ Characteristics

Item	General-purpose (High-capacity) Models	General-purpose Models	High-sensitivity Models
Number of poles	1 pole	2 pole	1 pole
Contact resistance	100 mΩ max.		
Operate (set) time	15 ms max.		
Release (reset) time	5 ms max.		
Max. operating frequency	Mechanical:18,000 operation/hr Electrical:1,800 operation/hr at rated load		
Insulation resistance	1,000 MΩ min. (at 500 VDC)		
Dielectric strength	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 2,500 VAC, 1 min between contacts of different polarity 1,000 VAC, 1 min between contacts of same polarity	5,000 VAC, 1 min between coil and contacts 1,000 VAC, 1 min between contacts of same polarity
Impulse withstand voltage	10 kV (1.2×50 μs) between coil and contact		
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)		
Shock resistance	Destruction: 1,000 m/s <sup>2</sup> (approx. 100 G) Malfunction: 100 m/s <sup>2</sup> (approx. 10 G)		
Endurance (Mechanical)	20,000,000 operations (at 18,000 operations/hr)		
Ambient temperature	Operating: -40°C to 85°C (with no icing) Storage: -40°C to 85°C (with no icing)		
Ambient humidity	5% to 85%		
Weight	Approx. 12 g		

Note: Values in the above table are the initial values.

## ■ Approved Standards

UL508 (File No. E41643)/CSA C22.2 (No. 14) (File No. LR31928)





Model	Contact form	Coil ratings	Contact ratings
G2RL-1A	SPST-NO	3 to 48 VDC	12 A at 250 VAC (General use) 12 A at 24 VDC (Resistive)
G2RL-1	SPDT		
G2RL-1A-E	SPST-NO	5 to 24 VDC	16 A at 250 VAC (General use) 16 A at 24 VDC (Resistive)
G2RL-1-E	SPDT		
G2RL-1A-H	SPST-NO	3 to 48 VDC	10 A at 250 VAC (General use) 10 A at 24 VDC (Resistive)
G2RL-1-H	SPDT		
G2RL-2A	DPST-NO	3 to 48 VDC	8 A at 277 VAC (General use) 8 A at 30 VDC (Resistive)
G2RL-2	DPDT		

## VDE (EN61810-1) (License No. 119650)


Model	Contact form	Coil ratings	Contact ratings
G2RL-1(A)	1 pole	5, 12, 18, 22, 24, 48 VDC	12 A at 250 VAC ( $\cos\phi=1$ ) 12 A at 24 VDC (L/R=0 ms) AC15: 3 A at 240 VAC DC13: 2.5 A at 24 VDC, 50 ms
G2RL-1(A)-E	1 pole	5, 12, 18, 22, 24, 48 VDC	16 A at 250 VAC ( $\cos\phi=1$ ) 16 A at 24 VDC (L/R=0 ms) AC15: 3 A at 240 VAC (NO) 1.5 A at 240 VAC (NC) DC13: 2.5 A at 24 VDC (NO), 50 ms
G2RL-1(A)-H	1 pole	5, 9, 12, 24 VDC	10 A at 250 VAC ( $\cos\phi=1$ ) 10 A at 24 VDC (L/R=0 ms)
G2RL-2(A)	2 poles	5, 12, 18, 22, 24, 48 VDC	8 A at 250 VAC ( $\cos\phi=1$ ) 8 A at 24 VDC (L/R=0 ms) AC15: 1.5 A at 240 VAC DC13: 2 A at 30 VDC, 50 ms

## Engineering Data


## Maximum Switching Capacity

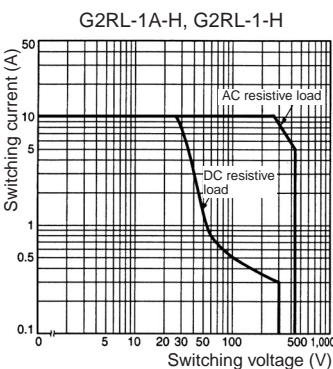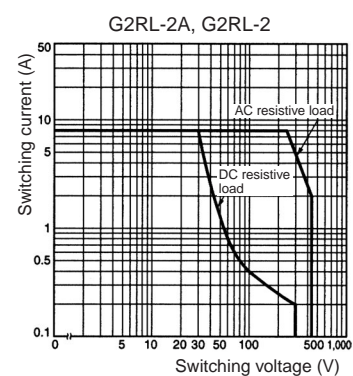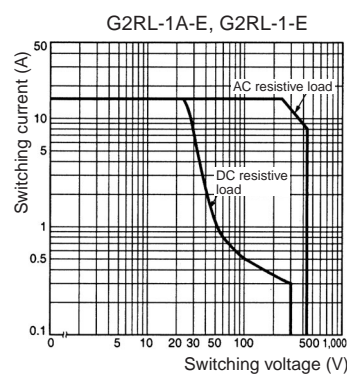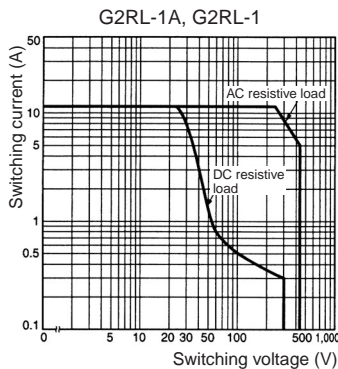

## Ambient Temperature vs Rated Carry Current



## Ambient Temperature vs Maximum Coil Voltage

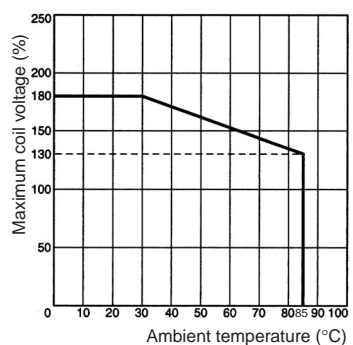

Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Note: Contact your OMRON representative for the data on fully sealed models.

## Electrical Endurance Data


G2RL-1-E	16 A at 250 VAC ( $\cos\phi=1$ ) 16 A at 24 VDC 8 A at 250 VAC ( $\cos\phi=0.4$ ) 8 A at 30 VDC (L/R=7 ms)	30,000 operations min. 30,000 operations min. 200,000 operation min. (normally open side operation) 10,000 operation min. (normally open side operation)
G2RL-1	12 A at 250 VAC ( $\cos\phi=1$ ) 12 A at 24 VDC 5 A at 250 VAC ( $\cos\phi=0.4$ ) 5 A at 30 VDC (L/R=7 ms)	50,000 operations min. 30,000 operations min. 150,000 operation min. (normally open side operation) 20,000 operation min. (normally open side operation)
G2RL-1-H	10 A at 250 VAC ( $\cos\phi=1$ ) 10 A at 24 VDC	100,000 operations min. 50,000 operations min.
G2RL-2	8 A at 250 VAC ( $\cos\phi=1$ ) 8 A at 30 VDC	30,000 operations min. 30,000 operations min.

Note: The results shown reflect values measured using very severe test conditions i.e., Duty: 1 s ON/1 s OFF. Electrical endurance will vary depending on the test conditions. Contact your OMRON representative if you require more detailed information for the electrical endurance under your test conditions.


## Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

### G2RL-1A(-H), G2RL-1A4

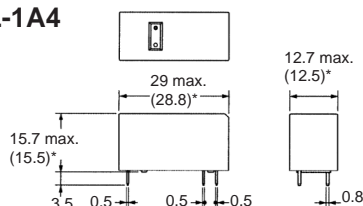


#### Terminal Arrangement/ Internal Connection (Bottom View)




\* Indicates average dimensions.


#### Mounting Holes (Bottom View)

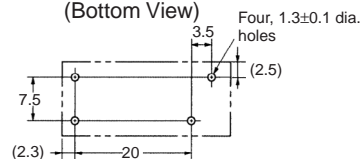

### G2RL-1(-H), G2RL-14

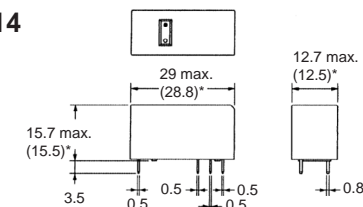


#### Terminal Arrangement/ Internal Connection (Bottom View)





\* Indicates average dimensions.


#### Mounting Holes (Bottom View)

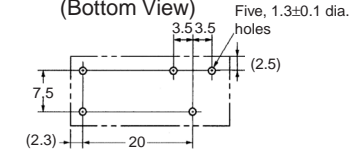

### G2RL-1A-E, G2RL-1A4-E

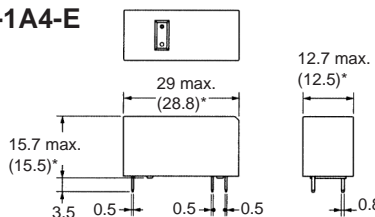


#### Terminal Arrangement/ Internal Connection (Bottom View)




\* Indicates average dimensions.


#### Mounting Holes (Bottom View)

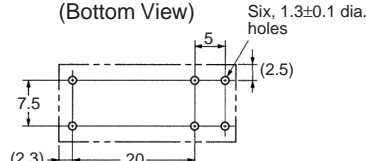

### G2RL-1-E, G2RL-14-E

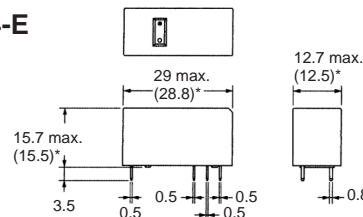


#### Terminal Arrangement/ Internal Connection (Bottom View)




\* Indicates average dimensions.


#### Mounting Holes (Bottom View)

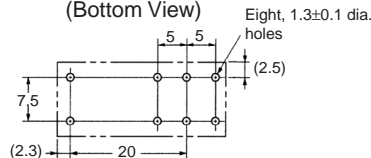

### G2RL-2A, G2RL-2A4

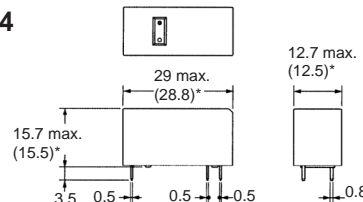


#### Terminal Arrangement/ Internal Connection (Bottom View)





\* Indicates average dimensions.


#### Mounting Holes (Bottom View)

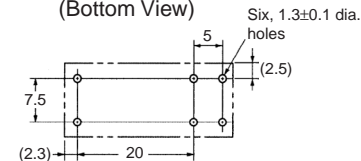

### G2RL-2, G2RL-24

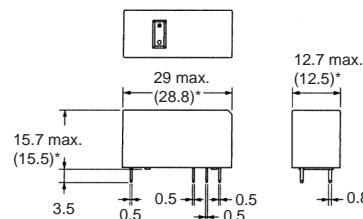


#### Terminal Arrangement/ Internal Connection (Bottom View)



\* Indicates average dimensions.

#### Mounting Holes (Bottom View)

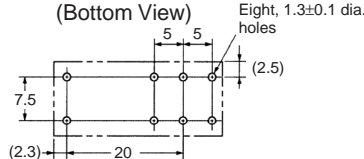

## Precautions

### Disclaimer:

All technical performance data applies to the product as such; specific conditions of individual applications are not considered. Always check the suitability of the product for your intended purpose. OMRON does not assume any responsibility or liability for noncompliance herein, and we recommend prior technical clarification for applications where requirements, loading, or ambient conditions differ from those applying to general electric applications. Any responsibility for the application of the product remains with the customer alone. THIS COMPONENT CAN NOT BE USED FOR AUTOMOTIVE APPLICATIONS.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. J117-E1-04 In the interest of product improvement, specifications are subject to change without notice.

## OMRON RELAY & DEVICES Corporation

C & C Power Relay Division  
Marketing Department

1110, Sugi, Yamaga-city, Kumamoto-Pref., 861-0596 Japan  
Tel: (81)968-44-4160/Fax: (81)968-44-4107

Printed in Japan  
0406-0.5M (0999) (M)