

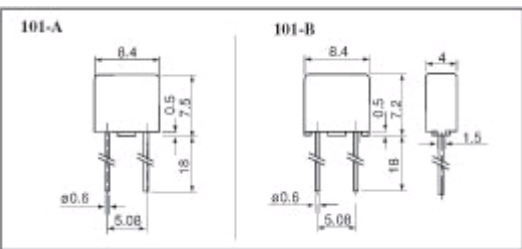


Micro Fuse(Fast-blow) --- ZH101

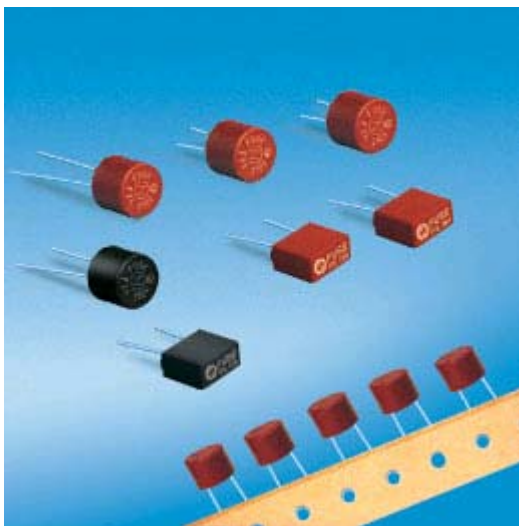

I-T CHARACTERISTICS CURVE

电流-时间曲线图

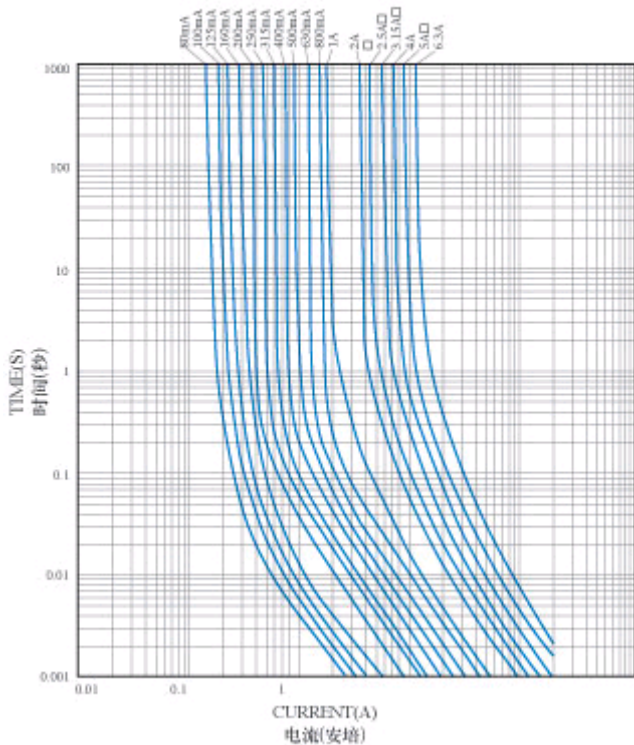

Product Model	Rating Current	Rating Voltage(V)
ZH101-0063	63mA	250
ZH101-0080	80mA	250
ZH101-0100	100mA	250
ZH101-0125	125mA	250
ZH101-0160mA	160mA	250
ZH101-0200	200mA	250
ZH101-0250	250mA	250
ZH101-0315	315mA	250
ZH101-0400	400mA	250
ZH101-0500	500mA	250
ZH101-0630	630mA	250
ZH101-0800	800mA	250
ZH101-010	1A	250
ZH101-013	1.25A	250
ZH101-016	1.6A	250
ZH101-020	2A	250
ZH101-025	2.5A	250
ZH101-032	3.15A	250
ZH101-040	4A	250
ZH101-050	5A	250
ZH101-063	6.3A	250

INTERRUPTING RATLNG:
35A OR 10In WHICHEVER IS GREATER

电气特性 ELECTRICAL CHARACTERISTICS

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max(最慢)	30min
2.75In	Min(最快)	10sec
	Max(最慢)	3sec
4In	Min(最快)	3ms
	Max(最慢)	300ms
10In	Max(最慢)	20ms