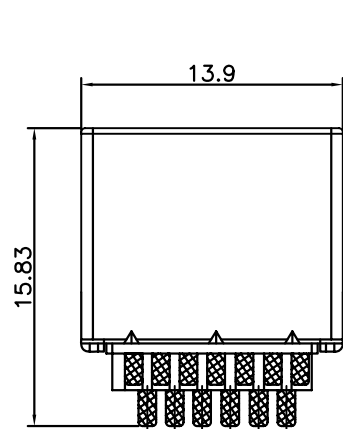
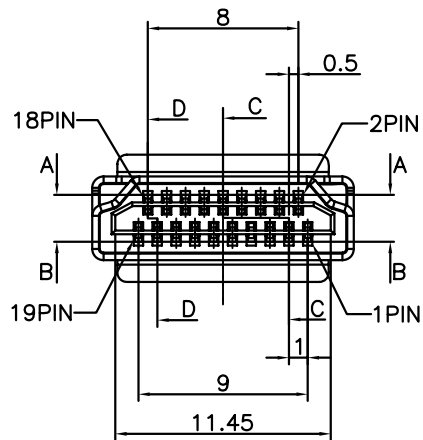


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 19/07/05		

NOTES:

1. MATERIALS

- . Insulator: thermoplastic,UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy

2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -20°C to +70°C.

3. PRODUCT NUMBER CODE:

DS1117 - X X X

- Contact plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold
- Shell plating
6: Tin
N: Nickel
- Color of housing
B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	HDMI 19PIN MALE Solder type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1117
.XX	±0.25	.XX	±2°	HDMI-M19 1117		
DRAWING TYPE		CUSTOMER				
SCALE		1:1	SHEET 1 OF 1			
DRAWING NO.		C-DS1117-XXX				