

# SPECIFICATION



ER34615M 3.6V

Li-SOCL2 Battery

## Electrical characteristics

(Typical values relative to cells stored for one year at +30 °C max)

○ Nominal capacity **14000mAh**  
Discharged capacity at 15mA, +25 °C, 2.0V cut off

○ Open circuit voltage **3.66V**

○ Max. recommended continuous current **1800mA**

○ Max. Pulse capability **3500mA**  
3500mA, 0.1 second pulses every 2 minutes, drained with 50%, 15mA at 25 °C from undischarged cells with 20µA base current, yield voltage readings above 2.7V, the value may vary according to the pulse characteristics, the temperature and the cell's previous history

○ Operating temperature rang **-55 °C ~ +85 °C**

## STORAGE:

Stored in clean, dry and cool circumstances (the temperature should be 20 degrees or lower, less than 30 degrees)


## WARNING:

Don't charge, crush, disassemble, expose contents to water, heat above 85°C or may lead to explosion, burn or poison goods leakage. Discarded battery should be buried deeply to the ground.

## Key features

- High and stable operating voltage
- Long shelf life
- Annual self-discharge rate lower than 1% at +25°C
- Long operating life
- High energy density (700wh/kg)
- Wide operating temperature rang
- Stainless steel can and cover
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard

Restricted for transport (Class 9)

 UL Component Recognition  
File Number MH46165



## Main applications

- Intelligent instrument
- Military electronics instrument
- Alarms or security equipment
- Memory backup
- GPS tracking
- Car electronics
- Professional electronic equipment


.....

# ER34615M 14000mAh

Discharge characteristics at 25°C

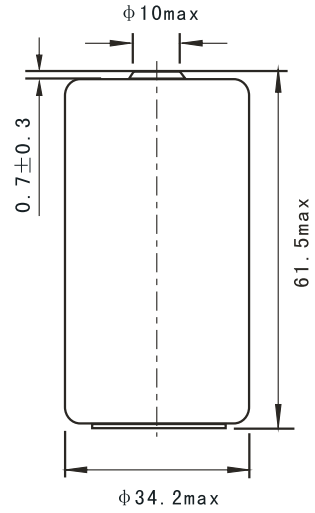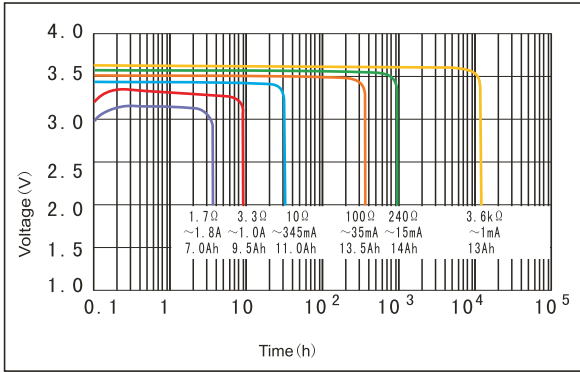


Voltage vs Temperature curve

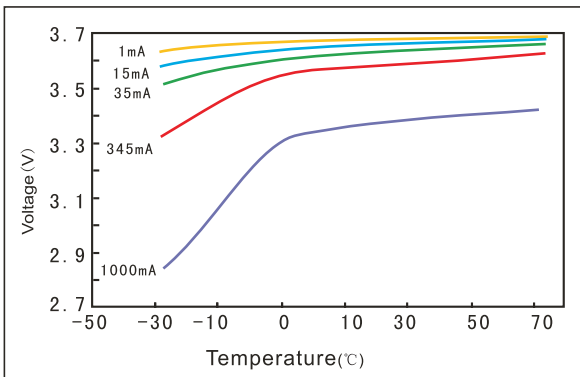


Dimensions in mm  
Weight: 109g

Available Terminations	
-/P*	Axial pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab
(*) : Reference to Standard Terminals for Single Cells	

Capacity vs Current curve (cut off with 2.0V)

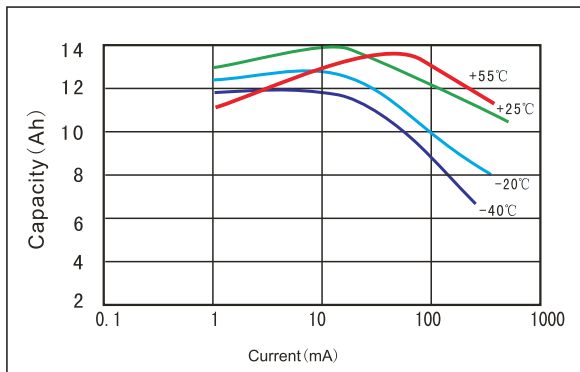

Discharge characteristics after storage

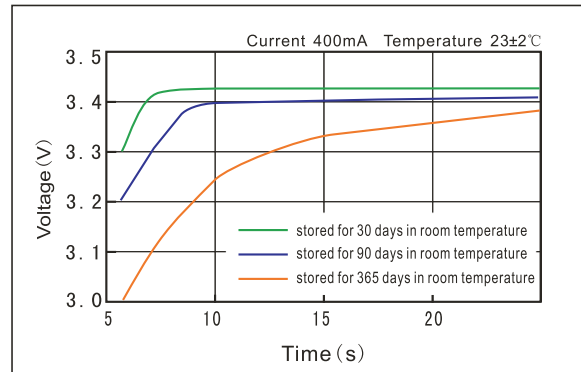

Data in this page is subject to change without notice and becomes contractual only after written confirmation by Fute.

Wuhan FANSO Technology Co.,Ltd

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-8445 2920

Fax: 86-27-84453116

Post Code: 430051

Web: [www.fansobattery.com](http://www.fansobattery.com) Email: [lixif@fansobattery.com](mailto:lixif@fansobattery.com)