





<b>CUSTOMER</b>	<b>NUMBER: 070404-001</b>
-----------------	---------------------------

<b>VARIETY</b>	<b>PPART NO: TMB-12A03</b>
----------------	----------------------------

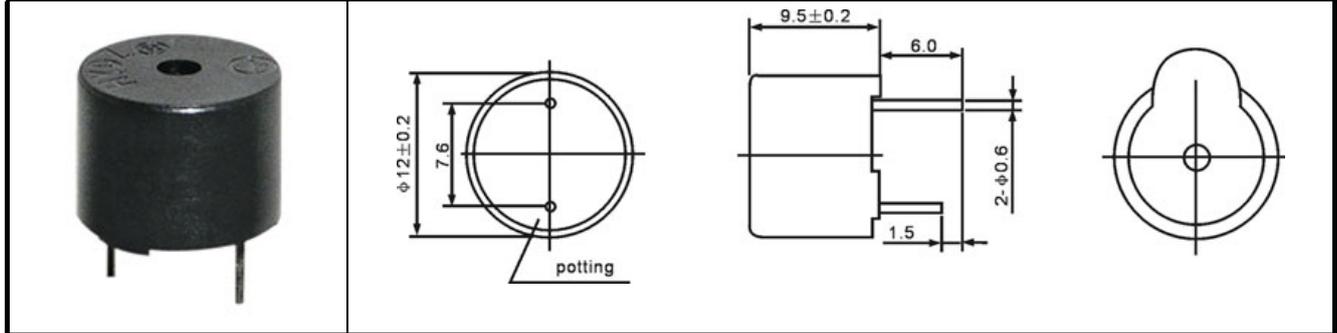

<b>ELECTICAL REQUIREMENTS</b>	<b>FREQUENCY RESPONSE</b>
-------------------------------	---------------------------

Rated Voltage	3V
Operating Voltage	1.5~5V
Max. Rated Current	30mA
The minimum voice presses	85dB
The flaps the even rate	2300±300 Hz
Operating Temperature	-20 ~+115c
Weight	2g

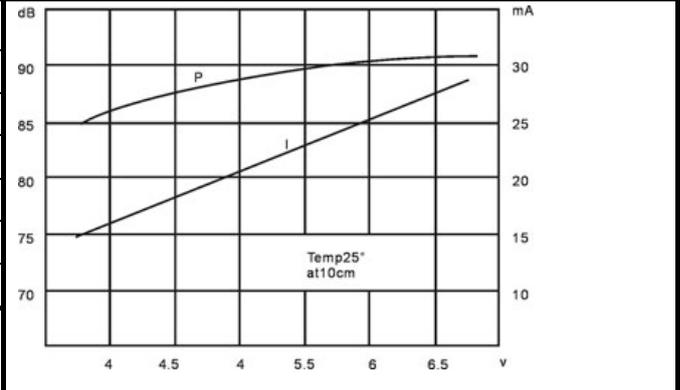

<b>TEST INSTRUMENT</b>
------------------------

	<b>DASG3186</b>
	<b>2B-14</b>
	<b>CAL-7749</b>
	<b>JH6160</b>

<b>OTHERS</b>
---------------

--	--

<b>Materials</b>			
------------------	--	--	--

<b>OUTSIDE SHELL</b>	<b>Ppo</b>	<b>CIRCUIT</b>	
<b>WIRE</b>		<b>CORE</b>	
<b>SLICE</b>		<b>COATING EPOXY</b>	<b>AB</b>

<b>NO</b>	<b>Revision \Date \Check</b>	<b>Approved</b>	<b>Checked By</b>	<b>Drawh By</b>
1				
2		<b>Remark</b>		
3				