

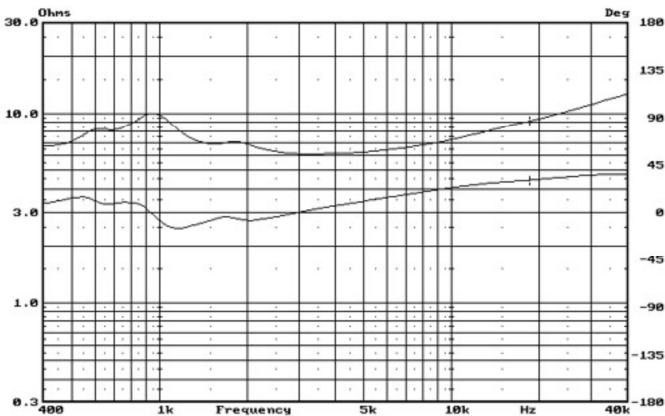


Tweeter Driver Q1R

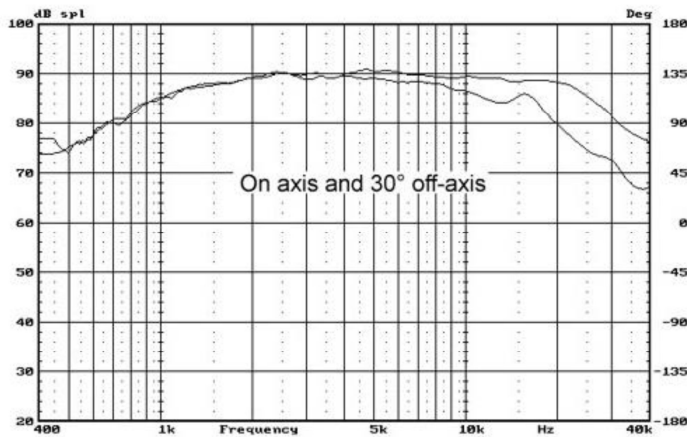

An identifying mark:

- Rated Impedance 6ohm
- Resonant Frequency 1000H z
- Rated Power 15W
- Max Power 30W
- Sensitivity(2.83v/1m) 89dB
- Coil diameter 28mm
- DC resistance 5.3ohm
- coil wire CCAW wire
- Coil frame High temperature resistant AL
- Magnetic circuit Shielded anti-magnetic magnetic circuit
- Magnet High perf. ferrite
- Suggested Crossover >2500Hz

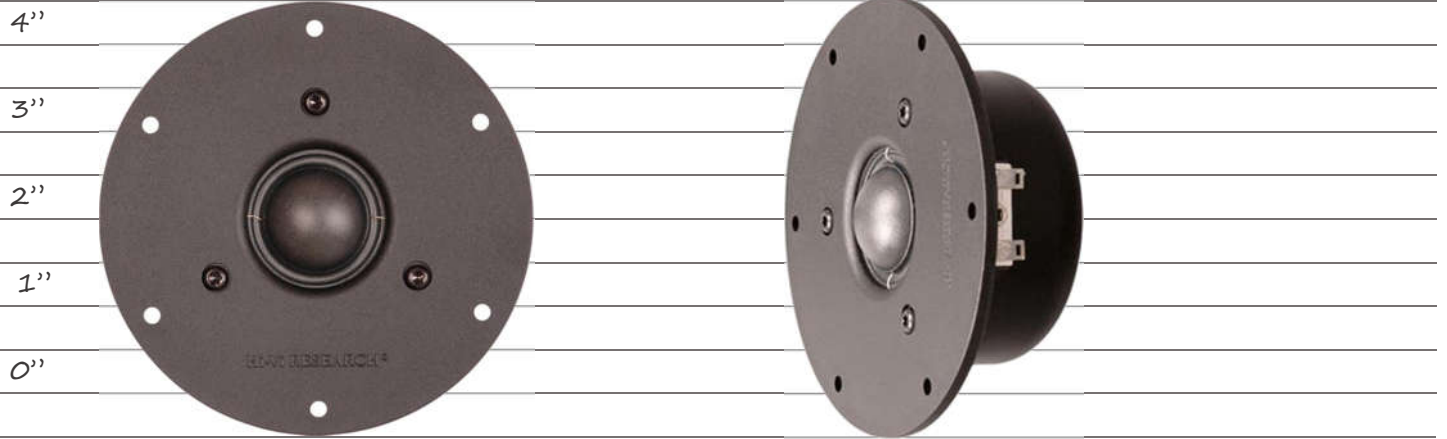