


MODEL: T78

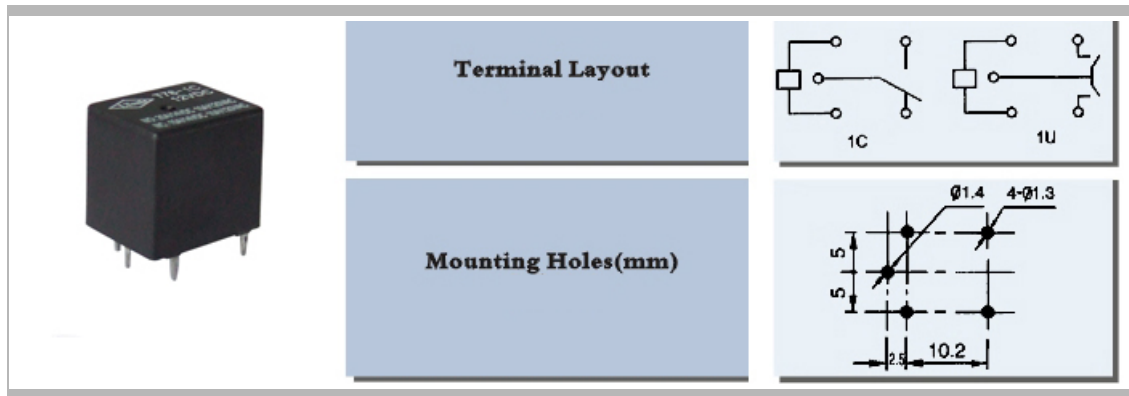

| | | |
|-------------------------------|--------------------------|---|
| CLASSIFICATION | | AUTOMOBILE RELAY |
| Appearance | | T78 |
| | | |
| Outline Dimension(L×W×H)寸(mm) | | 15.7×12.3×14 |
| Contact Form | | 1A,1C |
| Contact Resistance | | <50mΩ |
| Coil Voltage | | 6,9,12,24VDC |
| Pick-up Voltage | | ≤65% |
| Release Voltage | | ≥10% |
| Coil Power(W) | | 0.6W,0.8W |
| Contact Rating | | NO:20A 14VDC 10A 120VAC NC:15A 14VDC 10A 120VAC |
| Insulation Resistance | | 100MΩ |
| Dielectric Strength | Between Open Contact | 750VAC |
| | Between Coil and Contact | 1500VAC |
| Life | Electrical | 10 ⁵ |
| | Mechanical | 10 ⁷ |
| Temperature Range | | -40~+85℃ |
| Terminal Layout | | |
| Mounting Holes(mm) | | |
| Mounting Form | | PCB Terminal |
| Weight | | 6g |
| Salty Approval | | UL,TUV |
| Cross-Reference | | FUJITSU FBR51 |