



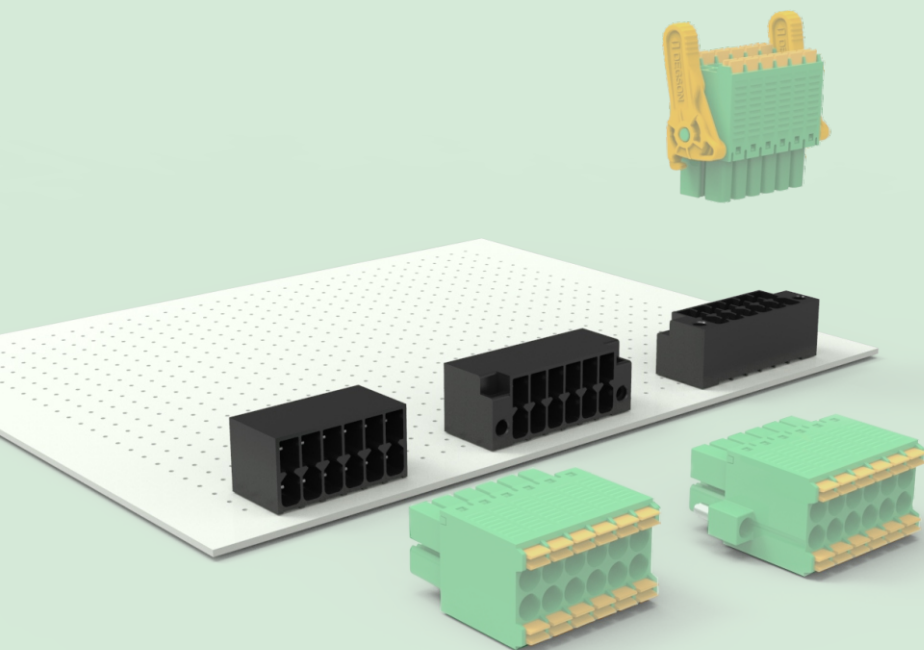


15EDGRHC/RHCM/ VHCM-THR-3.5


- 紧凑型结构设计，双排产品，高度仅为10.80mm；
- 耐高温材料，可采用THR回流焊接工艺；
- 提供直针、弯针、带法兰、不带法兰等四种选择。
- Compact structure with double rows, the height is only 10.80mm；
- THR soldering is available thanks to the heat resistance material；
- There are straight pin type, bending pin type, flange type and standard type to choose.




15EDGRHC-THR-3.5



15EDGRHCM-THR-3.5



15EDGVHC-THR-3.5



15EDGVHCM-THR-3.5

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC61984技术参数(IEC61984 datasheet)				UL1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
15EDGRHC-THR-3.5	—	04-48P	160		8		300		8	

应用行业 Application

工业自动化、仪器仪表、电梯、电源、安防等行业。
Industrial automation, instrument, elevator, power supply, security etc.



产品包装方式 Packing

Product model	Pcs./Pkt.
15EDGRHC-THR-3.5-04P	50
15EDGRHC-THR-3.5-06P	50
15EDGRHC-THR-3.5-08P	50
15EDGRHC-THR-3.5-10P	50
15EDGRHC-THR-3.5-12P	50
15EDGRHC-THR-3.5-14P	50

Product model	Pcs./Pkt.
15EDGRHC-THR-3.5-16P	50
15EDGRHC-THR-3.5-18P	50
15EDGRHC-THR-3.5-20P	50
15EDGRHC-THR-3.5-22P	50
15EDGRHC-THR-3.5-24P	50

产品匹配 Counterparts

	15EDGKNH-7.62	15EDGKNH/MK/NHG-3.5
15EDGRHC-THR-3.5	●	
15EDGRHCM-THR-3.5		●
15EDGVHC-THR-3.5	●	
15EDGVHCM-THR-3.5		●

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
15EDGRHC-THR-3.5	DMC 1,5/X-G1-3,5	—

产品订货 How to order

15EDGRHC-THR-3.5	X	X	P	1	3	0 0 AH Standard
Series No.	No. of Pole					
	1 Single pitch	2 Double pitch				
	通用色 General Color		3 Black	PANTONE 419C	DEGSON 03	