

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 8A
- 2.Withstanding Voltage : AC1600V/1Min.
- 3.Wire Range : 28~16AWG

IEC Standard

1. Pollution Degree	3
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2.Wire Range : 0.2~1.5mm²






NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50/3.81mm, Poles : N=2-20P
- 3.Stripping length : 9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
TO	Over	Over	TO	Over	Over	Over	Over	
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

15EDGKDM - 3.5/3.81 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

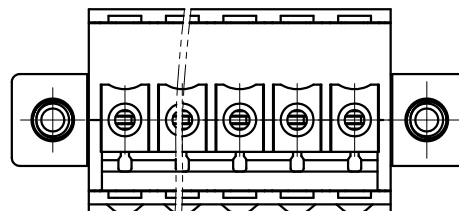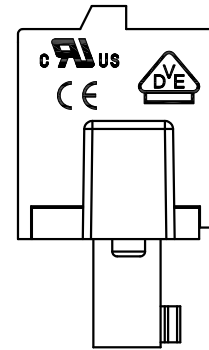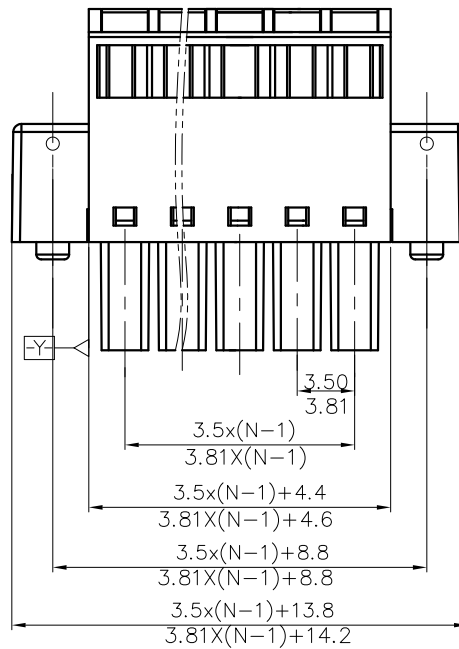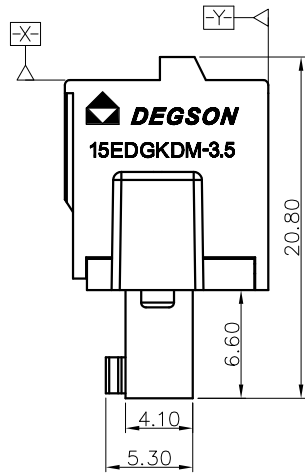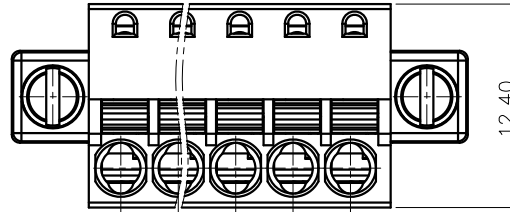

DETACHED LISTS	PART NO.:	/				NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	/				NAME:			
	CHKD:	/				15EDGKDM-3.5/3.81-XXP-1Y-00A(H)			
	DRFT:	/				TITLE: CUSTOMER DRAWING		REV	DO
		DRAWING NO.:		/		SHEET		1/1	
		MM (INCH)		DO NOT SCALE DRAWING		SCALE		1:1	