


### Surface Mounting Relay with the World's Smallest Mounting Area and a Height of Only 5.2 mm

- Subminiature model as small as 5.2 (H) x 6.5 (W) x 10 (L) mm is ideal for high-density mounting.
- Low profile of 5.2 mm and weight of only 0.7 g combine to improve mounting efficiency.
- Models with inside-L surface mounting terminals are available.
- Consumes approximately 70% the power of a conventional OMRON model and operates at a current that is as low as 100 mW.
- Surface mounting terminal models incorporate a unique terminal structure with high infrared irradiation efficiency which allows the terminal temperature to rise easily when mounting the IRS, thus ensuring excellent soldering.
- Ensures a dielectric strength of 1,500 VAC and conforms to FCC Part 68 (i.e., withstanding an impulse withstand voltage of 1,500 V for 10 x 160 μs).
- New-Y models offer an impulse withstand voltage of 2,500 V for 2 x 10 μs (conforms to Bellcore specifications) by optimizing the distance between coil and contacts.
- Conforms to UL1950 (File No. E41515)/CSA C22.2 No. 950 (File No. LR24825)

The above specifications are ensured as of August 1999.

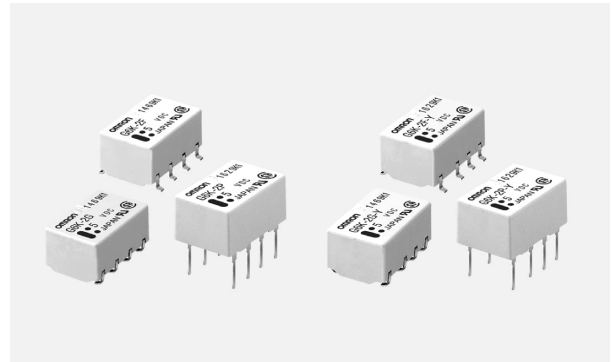

RC

### Ordering Information

| Classification |              |                           | Single-side stable | Single-winding latching | Single-side stable Bellcore: 2, 500 V for 2x10 μs |          |
|----------------|--------------|---------------------------|--------------------|-------------------------|---|----------|
| DPDT           | Fully sealed | Through-hole terminal     | G6K-2P             | G6KU-2P-Y               | G6K-2P-Y  |          |
|                |              | Surface mounting terminal | Inside-L           | G6K-2G                  | G6KU-2G-Y   | G6K-2G-Y |
|                |              |                           | Outside-L          | G6K-2F                  | G6KU-2F-Y   | G6K-2F-Y |

**Note:** 1. When ordering, add the rated coil voltage to the model number.

Example: G6K-2F 12 VDC  
Rated coil voltage

2. When ordering tape packing, add "-TR" to the model number.

Example: G6K-2F-TR 12 VDC  
Tape packing

Be sure since "-TR" is not part of the relay model number, it is not marked on the relay case.

#### Model Number Legend

**G6K**<sub>1</sub><sub>2</sub><sub>3</sub><sub>4</sub><sub>5</sub> VDC

#### 1. Relay function

None: Single-side stable model

U: Single-winding latching model

#### 2. Contact form

2: DPDT

#### 3. Terminal shape

F: Outside-L surface mounting terminal

G: Inside-L surface mounting terminal

P: PCB terminal

#### 4. Approved standards

None: UL, CSA

Does not conform to Bellcore specifications

Y: UL, CSA

Conforms to Bellcore specifications: 2,500 V for 2 x 10 μs

#### 5. Rated Coil Voltage

3, 4.5, 5, 12, 24 VDC

## Application Examples

Telephones, communications equipment, measurement devices, office automation machines, and audio-visual products.

## Specifications

Contact mechanism: Bifurcated crossbar Ag (Au-alloy contact)

Enclosure ratings: Fully sealed

### ■ Coil Ratings

#### Single-side Stable Models

G6K-2F, G6K-2G, G6K-2P

|                      |                                       |              |              |                |
|----------------------|---------------------------------------|--------------|--------------|----------------|
| Rated voltage        | 3 VDC                                 | 4.5 VDC      | 5 VDC        | 12 VDC         |
| Rated current        | 33.0 mA                               | 23.2 mA      | 21.1 mA      | 9.1 mA         |
| Coil resistance      | 91 $\Omega$                           | 194 $\Omega$ | 237 $\Omega$ | 1,315 $\Omega$ |
| Must operate voltage | 80% max. of rated voltage             |              |              |                |
| Must release voltage | 10% min. of rated voltage             |              |              |                |
| Max. voltage         | 150% of rated voltage at 23°C to 70°C |              |              |                |
| Power consumption    | Approx. 100 mW                        |              |              |                |

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

#### Single-side Stable Models (Belcore Version)

G6K-2F-Y, G6K-2G-Y, G6K-2P-Y

|                      |                                       |              |              |                |                |
|----------------------|---------------------------------------|--------------|--------------|----------------|----------------|
| Rated voltage        | 3 VDC                                 | 4.5 VDC      | 5 VDC        | 12 VDC         | 24 VDC         |
| Rated current        | 33.0 mA                               | 23.2 mA      | 21.1 mA      | 9.1 mA         | 4.6 mA         |
| Coil resistance      | 91 $\Omega$                           | 194 $\Omega$ | 237 $\Omega$ | 1,315 $\Omega$ | 5,220 $\Omega$ |
| Must operate voltage | 80% max. of rated voltage             |              |              |                |                |
| Must release voltage | 10% min. of rated voltage             |              |              |                |                |
| Max. voltage         | 150% of rated voltage at 23°C to 70°C |              |              |                |                |
| Power consumption    | Approx. 100 mW                        |              |              |                |                |

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

## Single-winding Latching Models (Bellcore Version)

G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y

|                    |                                       |              |              |                |                |
|--------------------|---------------------------------------|--------------|--------------|----------------|----------------|
| Rated voltage      | 3 VDC                                 | 4.5 VDC      | 5 VDC        | 12 VDC         | 24 VDC         |
| Rated current      | 33.0 mA                               | 23.2 mA      | 21.1 mA      | 9.1 mA         | 4.6 mA         |
| Coil resistance    | 91 $\Omega$                           | 194 $\Omega$ | 237 $\Omega$ | 1,315 $\Omega$ | 5,220 $\Omega$ |
| Must set voltage   | 75% max. of rated voltage             |              |              |                |                |
| Must reset voltage | 75% max. of rated voltage             |              |              |                |                |
| Max. voltage       | 150% of rated voltage at 23°C to 70°C |              |              |                |                |
| Power consumption  | Approx. 100 mW                        |              |              |                |                |

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.

### ■ Contact Ratings

|                        |                                 |
|------------------------|---------------------------------|
| Load                   | Resistive load                  |
| Rated load             | 0.3 A at 125 VAC; 1 A at 30 VDC |
| Rated carry current    | 1 A                             |
| Max. switching voltage | 125 VAC, 60 VDC                 |
| Max. switching current | 1 A                             |

### ■ Characteristics


| Item                                | Single-side stable models (double-pole)  |                               | Single-winding latching model                        |
|-------------------------------------|--|-------------------------------|--|
|                                     | G6K-2F, G6K-2G, G6K-2P   | G6K-2F-Y, G6K-2G-Y, G6K-2P-Y  | G6KU-2F-Y, G6KU-2G-Y, G6KU-2P-Y                      |
| Contact resistance (see note 1)     | 100 m $\Omega$ max.  |                               |  |
| Operating (set) time (see note 2)   | 3 ms max. (approx. 1.4 ms)   |                               | 3 ms max. (approx. 1.2 ms)                           |
| Release (reset) time (see note 2)   | 3 ms max. (approx. 1.3 ms)   |                               | 3 ms max. (approx. 1.2 ms)                           |
| Insulation resistance (see note 3)  | 1,000 M $\Omega$ min. (at 500 VDC)   |                               |  |
| Dielectric strength                 | Coil and contacts  | 1,500 VAC, 50/60 Hz for 1 min |  |
|                                     | Contacts of different polarity   | 1,000 VAC, 50/60 Hz for 1 min |  |
|                                     | Contacts of same polarity  | 750 VAC, 50/60 Hz for 1 min   |  |
| Impulse withstand voltage           | Coil and contacts  | 1,500 V (10 x 160 $\mu$ s)    | 2,500 V (2 x 10 $\mu$ s), 1,500 V (10 x 160 $\mu$ s) |
|                                     | Contacts of different polarity   | 1,500 V (10 x 160 $\mu$ s)    |  |
|                                     | Contacts of same polarity  |                               |  |
| Vibration resistance                | Destruction: 10 to 55 Hz, 5-mm double amplitude and 55 to 500 Hz, 300 m/s <sup>2</sup> (approx. 30G)<br>Malfunction: 10 to 55 Hz, 3.3-mm double amplitude and 55 to 500 Hz, 200 m/s <sup>2</sup> (approx. 20G) |                               |  |
| Shock resistance                    | Destruction: 1,000 ms <sup>2</sup> (approx. 100G)<br>Malfunction: 750 ms <sup>2</sup> (approx. 75G)  |                               |  |
| Life expectancy                     | Mechanical: 50,000,000 operations min. (at 36,000 operations/hour)<br>Electrical: 100,000 operations min. (with a rated load at 1,800 operations/hour)   |                               |  |
| Failure rate (P level) (see note 4) | 10 $\mu$ A at 10 mVDC  |                               |  |
| Ambient temperature                 | Operating: -40°C to 70°C (with no icing or condensation)<br>Storage: -40°C to 70°C (with no icing or condensation)   |                               |  |
| Ambient humidity                    | Operating: 35 to 85%   |                               |  |
| Weight                              | Approx. 0.7 g  |                               |  |

**Note:** The above values are initial values.


- Note:**
1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
  2. Values in parentheses are actual values.
  3. The insulation resistance was measured with a 500-VDC megger applied to the same parts as those used for checking the dielectric strength.
  4. This value was measured at a switching frequency of 120 operations/min.

# Engineering Data

## Maximum Switching Power

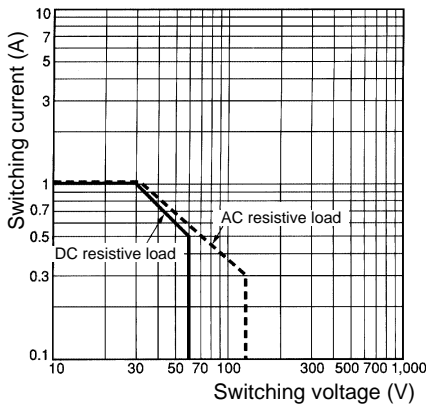


## Ambient Temperature vs. Maximum Coil Voltage

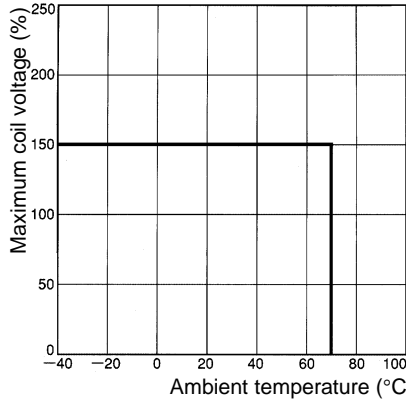


**Note:** The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


## Ambient Temperature vs. Switching Current

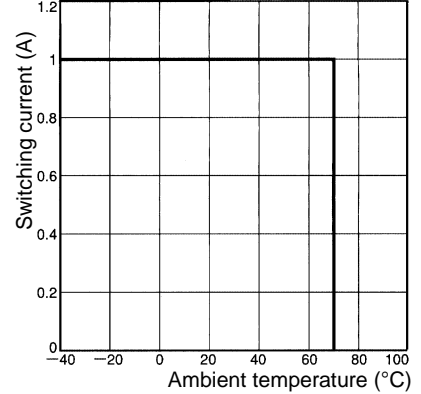


## Life Expectancy

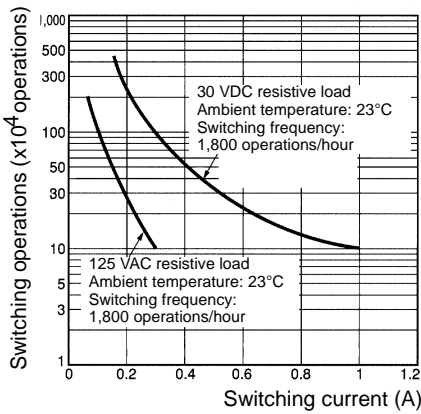


## Ambient Temperature vs. Must Operate or Must Release Voltage

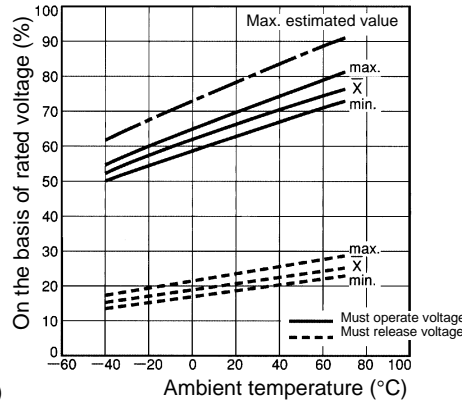


## Ambient Temperature vs. Must Set or Must Reset Voltage

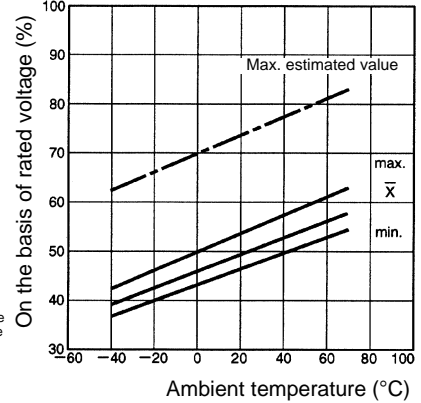


## Shock Malfunction

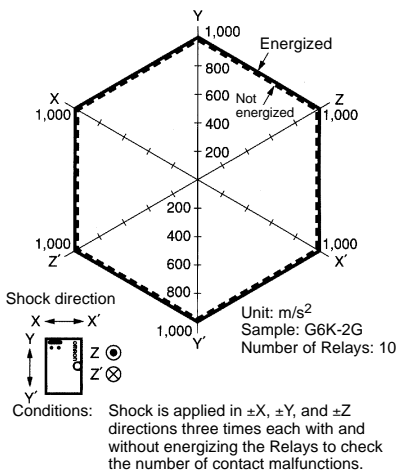


## Electrical Life Expectancy (with Must Operate and Must Release Voltage) (see note)

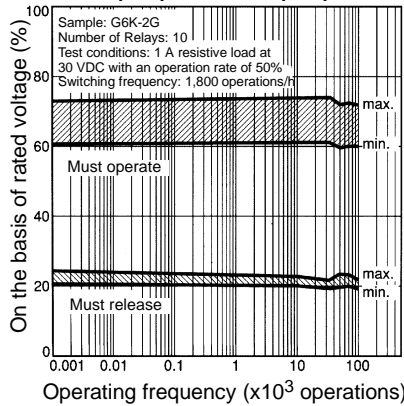

## Electrical Life Expectancy (Contact Resistance) (see note)

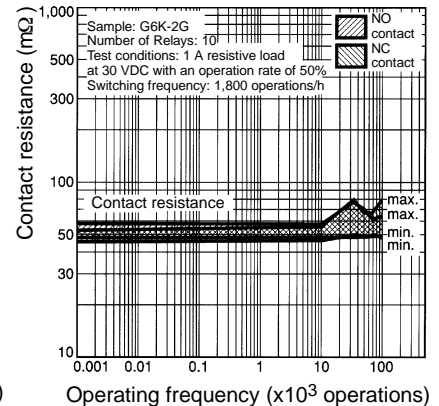


**Contact Reliability Test (see note)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

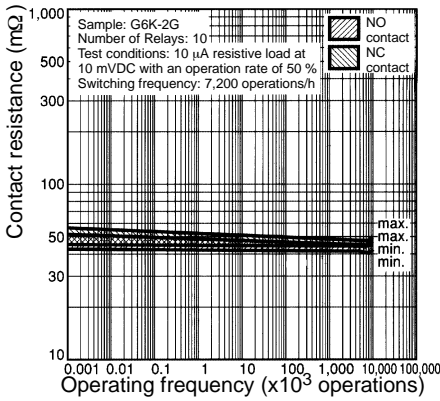


**Note:** The test was conducted at an ambient temperature of 23°C.




**Mutual Magnetic Interference**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

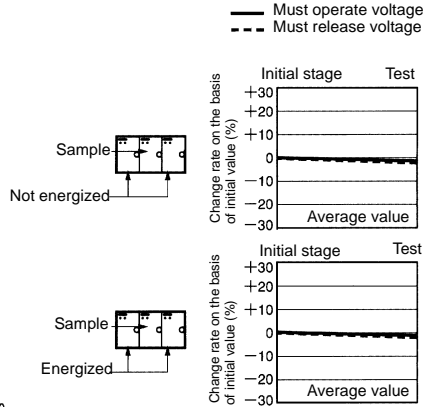


**Mutual Magnetic Interference**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

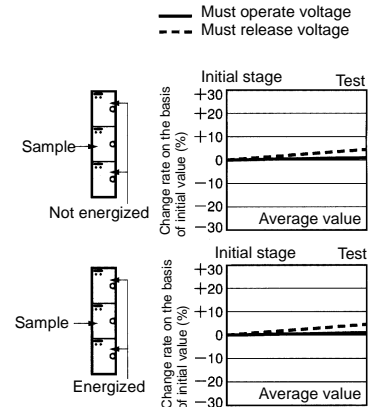


**External Magnetic Interference**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

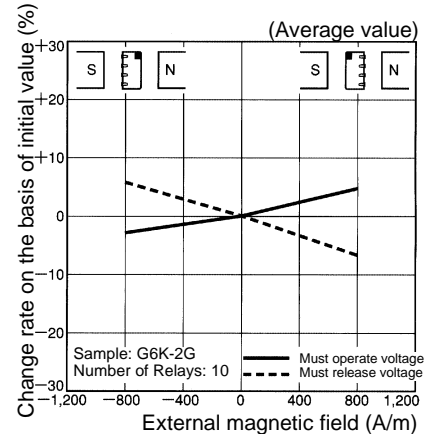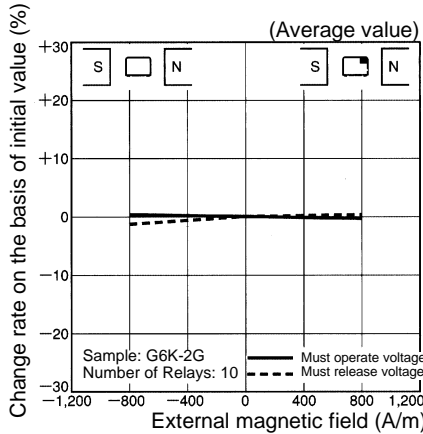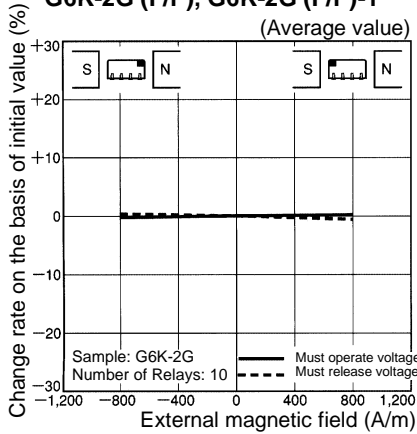


**High-frequency Characteristics (Isolation)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

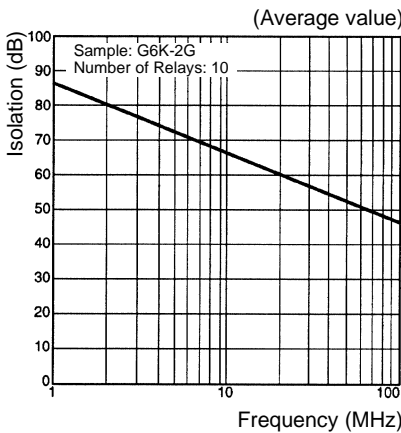


**High-frequency Characteristics (Insertion Loss)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

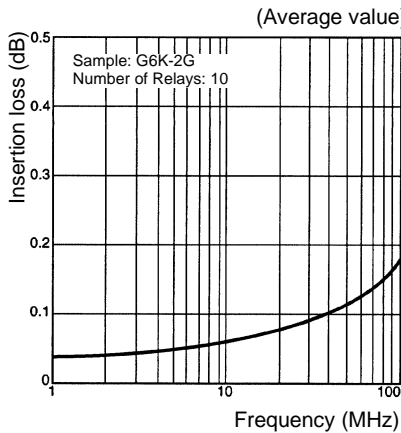


**High-frequency Characteristics (Return Loss)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

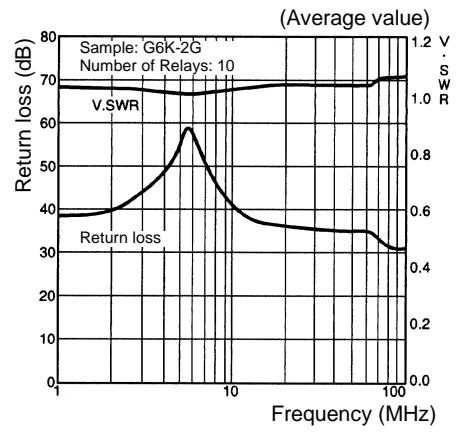


**Must Operate and Must Release Time Distribution (see note)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

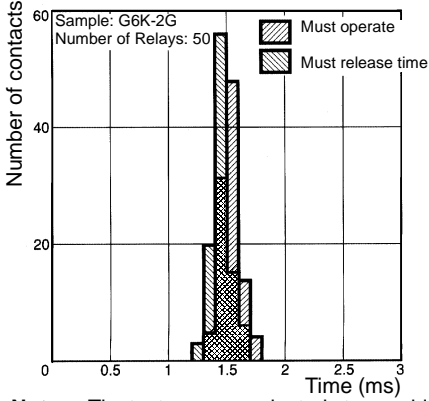

**Must Operate and Must Release Bounce Time Distribution (see note)**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

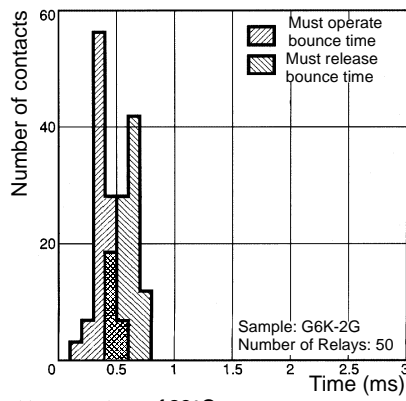

**Vibration Resistance**  
**G6K-2G (F/P), G6K-2G (F/P)-Y**

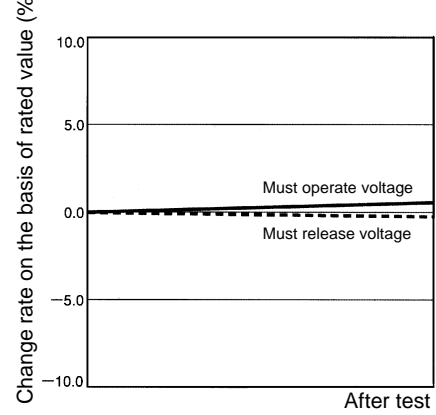




**Note:** The tests were conducted at an ambient temperature of 23°C.

**Dimensions**


**Note:** All units are in millimeters unless otherwise indicated.

■ DPDT


**G6K-2F**



**Mounting Dimensions (Top View)**  
 Tolerance: ±0.1 mm






**Terminal Arrangement/Internal Connections (Top View)**




**Note:** Each value has a tolerance of ±0.3 mm.


**G6K-2G**



**Mounting Dimensions (Top View)**  
 Tolerance: ±0.1 mm






**Terminal Arrangement/Internal Connections (Top View)**




**Note:** Each value has a tolerance of ±0.3 mm.


**G6K-2P**



**Mounting Dimensions (Bottom View)**  
 Tolerance: ±0.1 mm






**Terminal Arrangement/Internal Connections (Bottom View)**




**Note:** Each value has a tolerance of ±0.3 mm.

**G6K-2F-Y**




**Mounting Dimensions (Top View)**

Tolerance:  $\pm 0.1$  mm






**Terminal Arrangement/  
Internal Connections  
(Top View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

**G6K-2G-Y**




**Mounting Dimensions (Top View)**

Tolerance:  $\pm 0.1$  mm






**Terminal Arrangement/  
Internal Connections  
(Top View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

**G6K-2P-Y**




**Mounting Dimensions (Bottom View)**

Tolerance:  $\pm 0.1$  mm






**Terminal Arrangement/  
Internal Connections  
(Bottom View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

**G6KU-2F-Y**




**Mounting Dimensions (Top View)**

Tolerance:  $\pm 0.1$  mm






**Terminal Arrangement/  
Internal Connections  
(Top View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

**G6KU-2G-Y**




**Mounting Dimensions (Top View)**

Tolerance:  $\pm 0.1$  mm






**Terminal Arrangement/  
Internal Connections  
(Top View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

**G6KU-2P-Y**




**Mounting Dimensions (Bottom View)**

Tolerance:  $\pm 0.1$  mm



**Terminal Arrangement/  
Internal Connections  
(Bottom View)**




**Note:** Each value has a tolerance of  $\pm 0.3$  mm.

# Stick Packing and Tape Packing

## Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side. Fifty Relays are packed on one stick.

Be sure not to make mistakes in Relay orientation when mounting the Relay to the PCB.

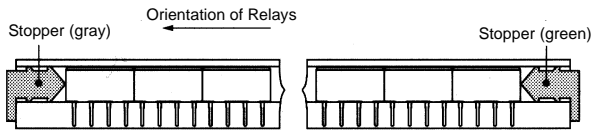

Stick length: 520 mm (stopper not included)  
 No. of Relays per stick: 50

## Tape Packing (Surface Mounting Terminal Models)


When ordering Relays in tape packing, add the prefix “-TR” to the model number, otherwise the Relays in stick packing will be provided.

Tape Type: ETX7200  
 (EIAJ (Electronic Industrial Association of Japan))


Reel type: RPM-16D (EIAJ)

Relays per Reel: 900

### 1. Direction of Relay Insertion

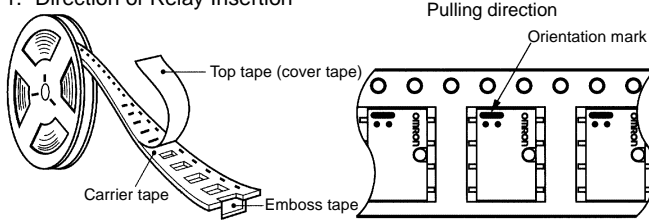


### 2. Reel Dimensions

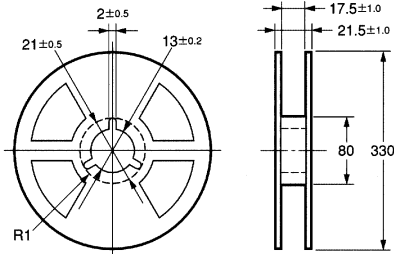


### 3. Carrier Tape Dimensions

G6K-2F, G6K-2F-Y, G6KU-2F-Y

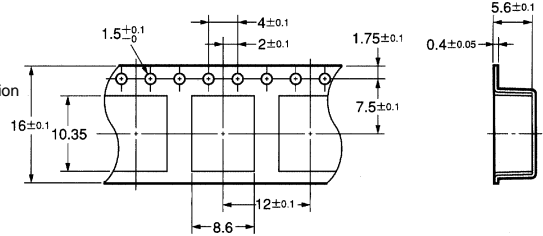

G6K-2G, G6K-2G-Y, G6KU-2G-Y

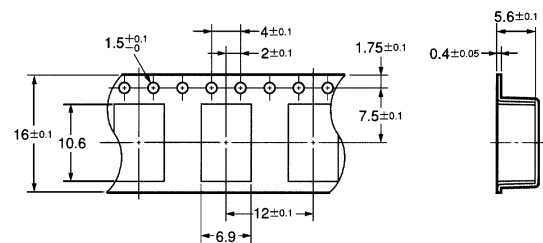





## Recommended Soldering Method

Temperatures indicate the surface temperatures of the PCB.

IRS Method (for surface mounting terminal models)

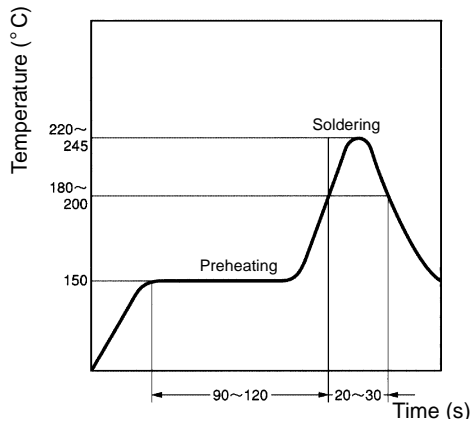

- The thickness of cream solder to be applied should be within a range between 150 and 200  $\mu\text{m}$  on OMRON's recommended PCB pattern.
- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left-hand side.

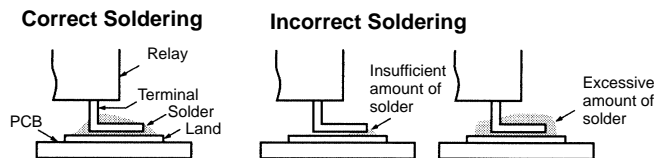

Visually check that the Relay is properly soldered.

### ■ Approved Standards

UL approval: UL1950 (File No. E41515)

CSA approval: C22.2 No. 950 (File No. LR24825)

| Contact form | Coil rating   | Contact rating                                       | Number of test operations |
|--------------|---|--|---------------------------|
| DPDT         | G6K-2G(F/P): 3 to 12 VDC<br>G6K(U)-2G(F/P)-Y: 3 to 24 VDC | 1 A at 30 VDC<br>0.5 A at 60 VDC<br>0.3 A at 125 VAC | 6,000                     |

## Precautions

For general precautions, refer to the *PCB Relays Catalog (X033)*. Familiarize yourself with the precautions and glossary before using the G6K.

### Correct Use

#### Handling

Leave the Relay unpacked until mounting it.

#### Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (260°C if the DWS method is used)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used)

Be sure to make a molten solder level adjustment so that the solder will not overflow on the PCB.

#### Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, make sure to set the securing force of each claw to the following so that the Relays characteristics will be maintained.



#### Environmental Conditions During Operation, Storage, and Transportation

Protect the Relay from direct sunlight and keep the Relay under normal temperature, humidity, and pressure.

If the Relay is stored for a long time in an adverse environment with high temperature, high humidity, organic gases, or sulfide gases, sulfide or oxide films will form on the contact surfaces. These films may result in unstable contact, contact problems, or functional problems. Therefore, operate, store, or transport the product under specified environmental conditions.

#### Latching Relay Mounting

Make sure that the vibration or shock that is generated from other devices, such as relays in operation, on the same panel and imposed on the Latching Relay does not exceed the rated value, otherwise the Latching Relay that has been set may be reset or vice versa. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

#### Maximum Allowable Voltage

The maximum allowable voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum allowable voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure to use the maximum allowable voltage beyond the value specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum allowable voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.


#### Coating

The Relay mounted on the PCB may be coated or washed but do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relay.


#### PCB Mounting

If two or more Relays are closely mounted with the long sides of the Relays facing each other and soldering is performed with infrared radiation, the solder may not be properly exposed to the infrared rays. Be sure to keep the proper distance between adjacent Relays as shown below.

##### G6K-2G

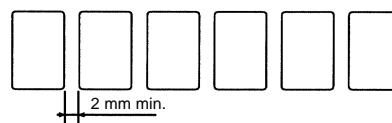

##### G6K-2F



Two or more Relays may be closely mounted with the short sides of the Relays facing each other.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.