

Switch

Tact Switch Series




KLS7-TS6611 6x6 Tact Switch Series

ELECTRICAL


- 1.Rating: 50mA 12VDC
- 2.Contact Resistance : 50mΩ max(initial)
- 3.Insulation Resistance: 100MΩ(minDC 250V)
- 4.Dielectric Strength : AC250V(50/60Hz for 1minute)
- 5.Electrically Life: 100000cycles
- 6.Environment temperature:-20°C~+70°C
- 7.Operating Force: 180/250(±30gf)
- 8.Seal temperature:260°C~ 280°C



H
1.5
1.7
1.9

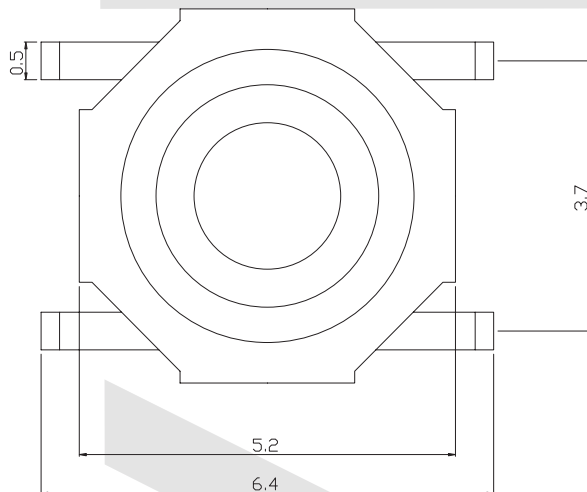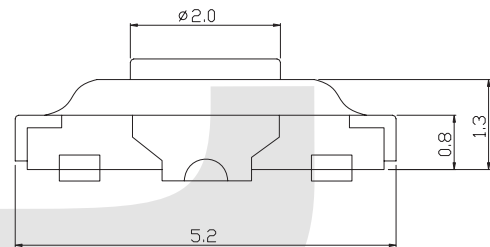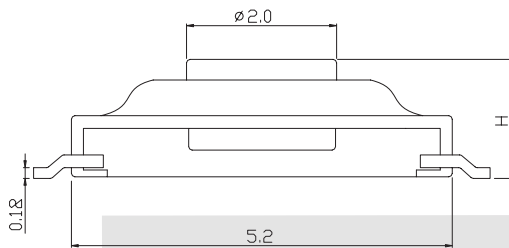

H1=1.5mm
H2=1.7mm
H3=1.9mm

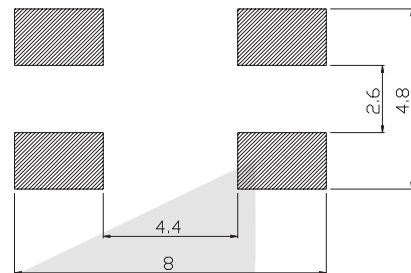

PCB LAYOUT

ORDER INFORMATION

KLS7-TS6611 - 1.5 - 180 -T

Series No.

Height: 1.5mm/1.7mm/1.9mm

Packing: B-Bulk T-Tape

Operating Force :180~250gf