

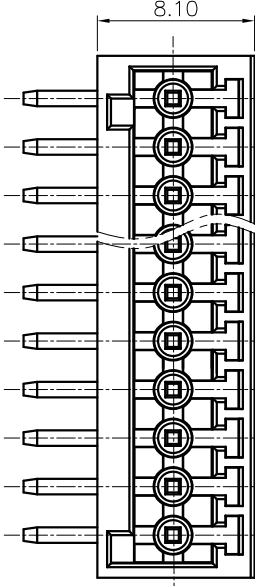


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

8P and 8P following no reinforcement.

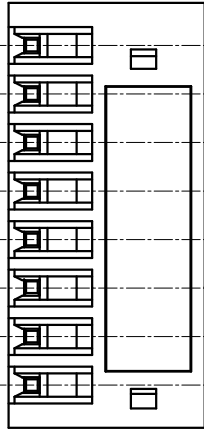

02P



NOTES1:

UL Standard

1. Rated voltage/current : 150V / 4A

2. Withstanding voltage : AC1300V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate Impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	5A

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.5mm, Poles : N=02~12P

3. Operating temperature: -40°C~+105°C

4. Undimensioned tolerances:

Pitch	range	in mm	Nominal dimension	range	in mm	tolerance
Over	6	10	Over	30	60	Over
TO	10	24	TO	60	100	TO
6	10	30	60	100	150	TO
±0.15/±0.20/±0.30/±0.50/±0.70/±1.00/±1.30						
±2°						

5. RoHS Compliance

15EDGRC - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Color) : 1. (Grey)

(Single Pitch)

00A - (Standard)

(RoHS)

2. (Blue)

3. (Black)

4. (Green)





5. (Orange)

6. (Red)

7. (Transparent)

8. (Yellow)

9. (White)

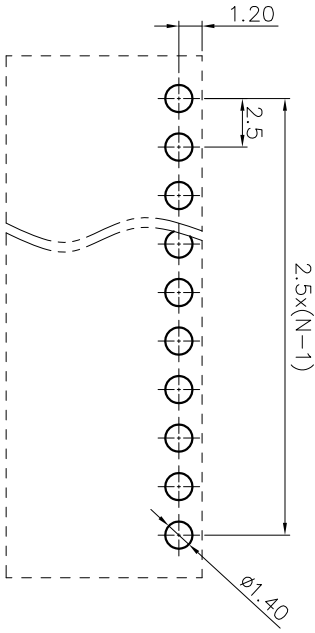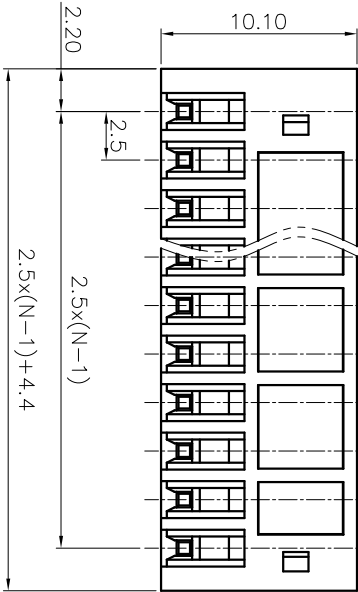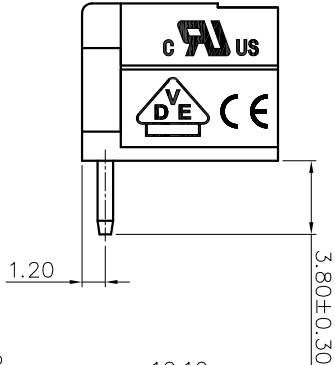

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	15EDGRC-2.5-XXP-1Y-00A(H)
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	
SCALE	1:1