


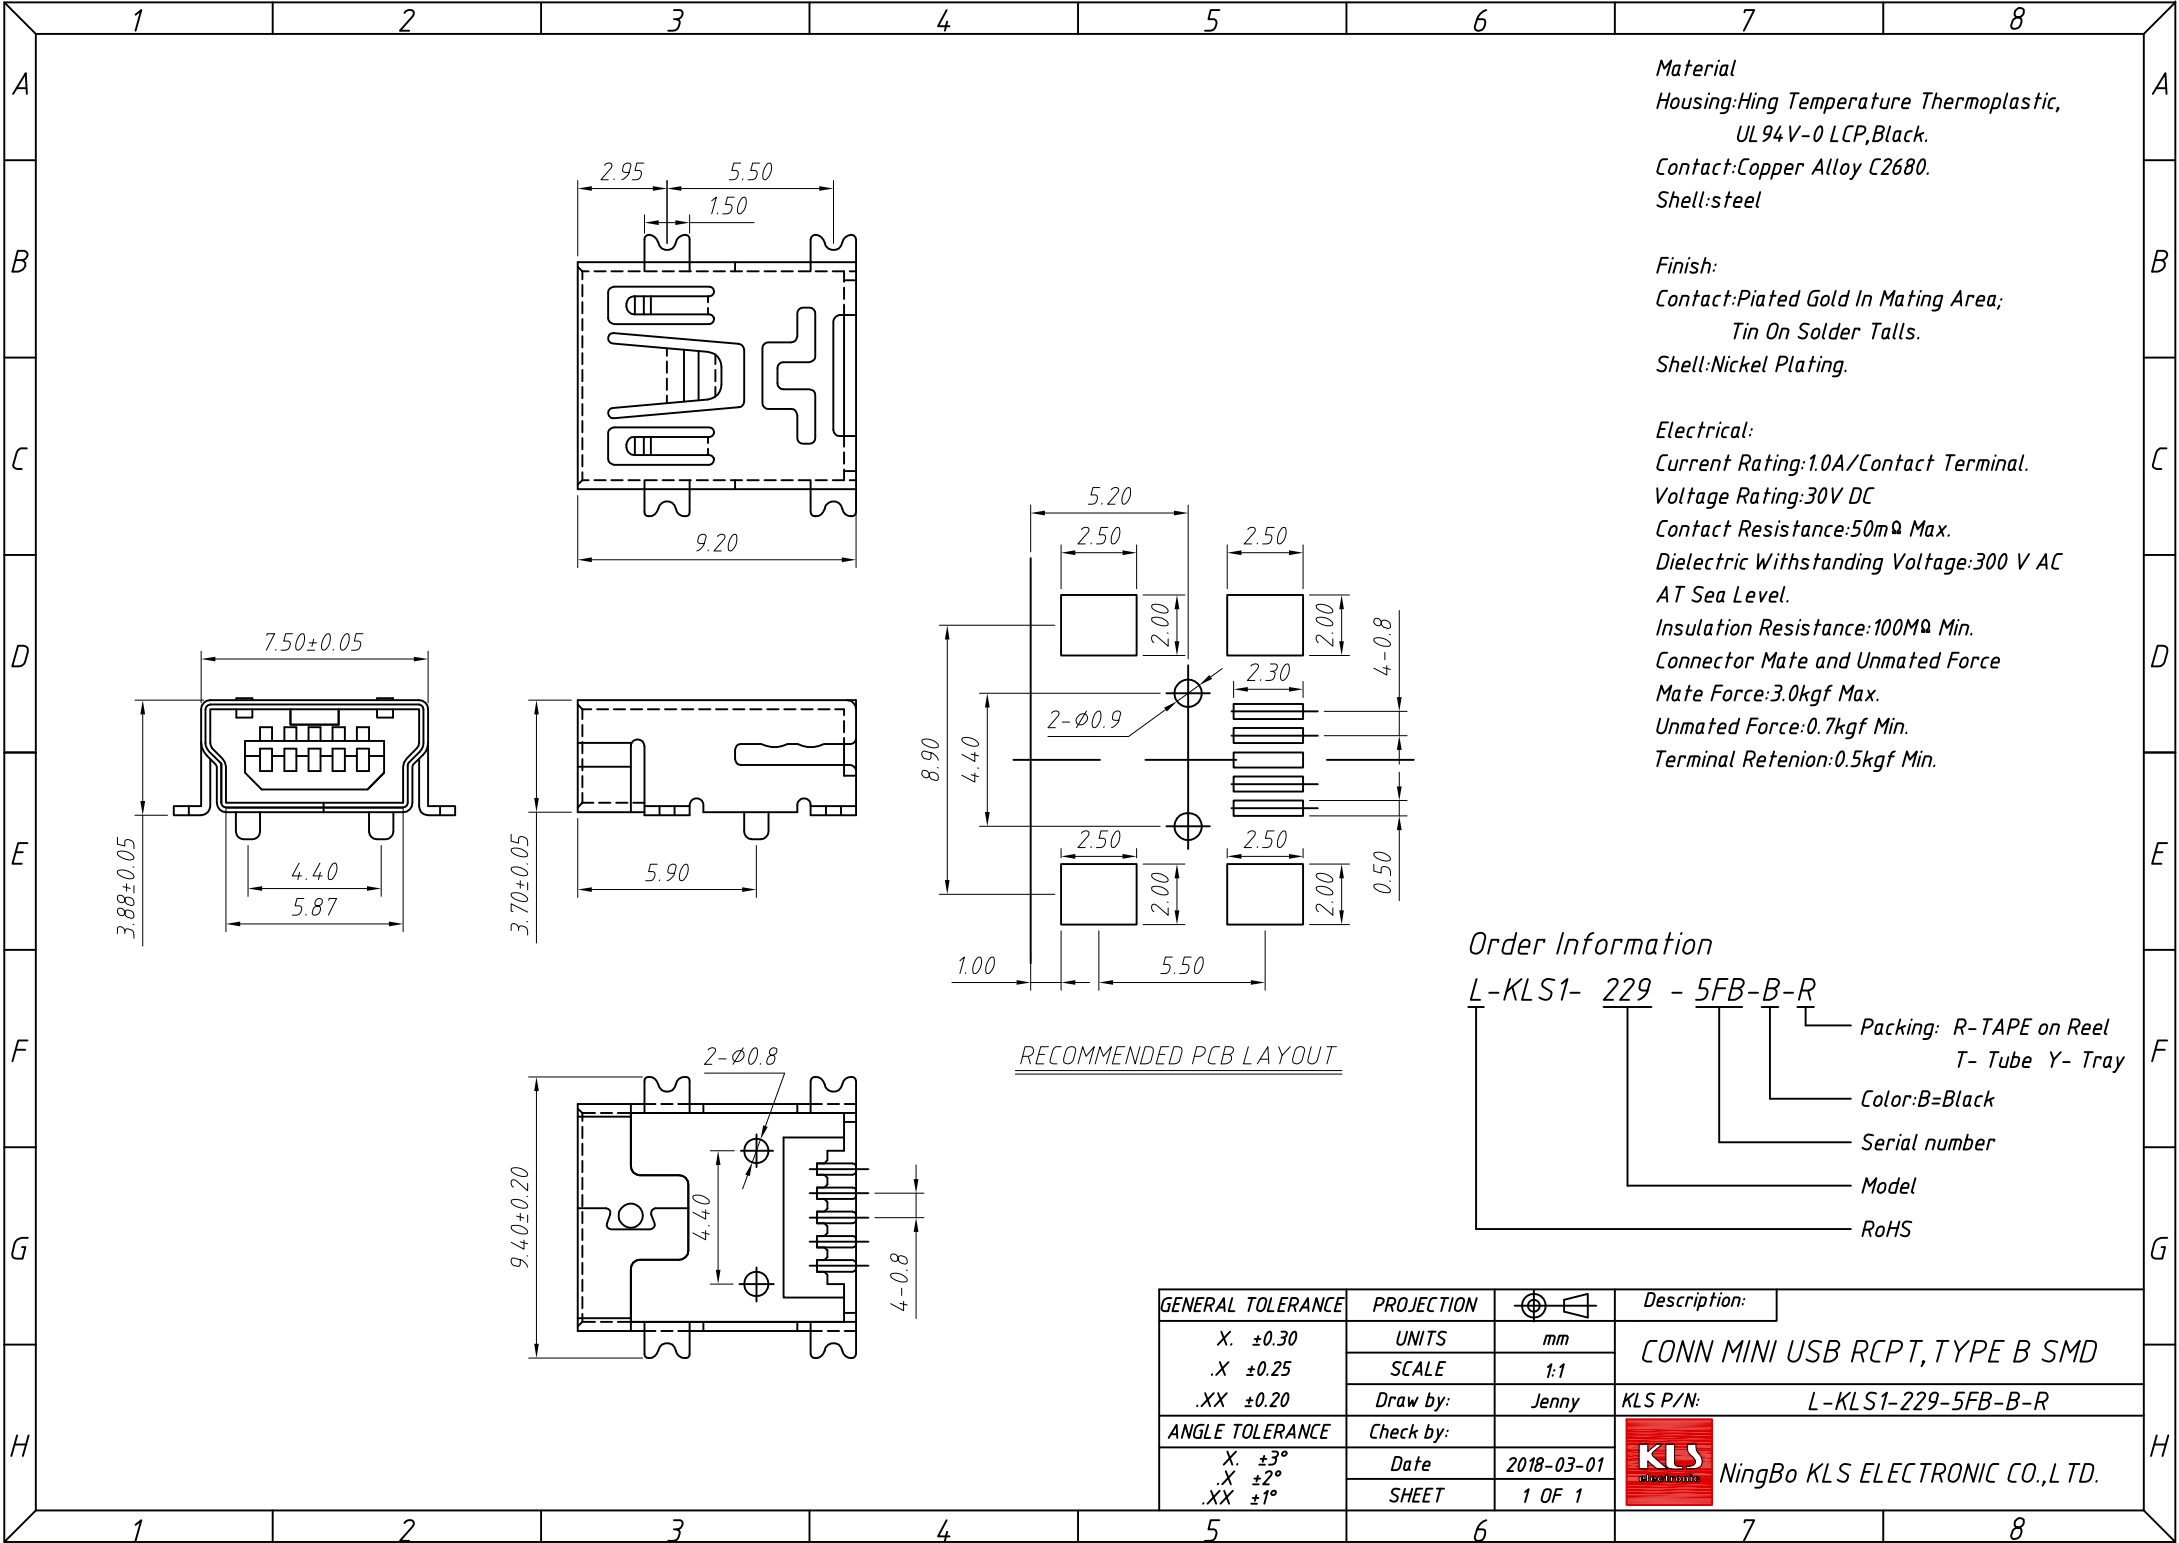

Material
Housing:Hing Temperature Thermoplastic,
UL 94V-0 LCP,Black.
Contact:Copper Alloy C2680.
Shell:steel

Finish:
Contact:Plated Gold In Mating Area;
Tin On Solder Talls.
Shell:Nickel Plating.

Electrical:
Current Rating:1.0A/Contact Terminal.
Voltage Rating:30V DC
Contact Resistance:50mΩ Max.
Dielectric Withstanding Voltage:300 V AC
AT Sea Level.
Insulation Resistance:100MΩ Min.
Connector Mate and Unmated Force
Mate Force:3.0kgf Max.
Unmated Force:0.7kgf Min.
Terminal Retenion:0.5kgf Min.

Order Information

L-KLS1- 229 - 5FB-B-R

Packing: R- TAPE on Reel
T- Tube Y- Tray

Color:B=Black

Serial number

Model

RoHS

GENERAL TOLERANCE	PROJECTION		Description:	
X. ±0.30	UNITS	mm	CONN MINI USB RCPT,TYPE B SMD	
.X ±0.25	SCALE	1:1		
.XX ±0.20	Draw by:	Jenny	KLS P/N: L-KLS1-229-5FB-B-R	
ANGLE TOLERANCE	Check by:		 NingBo KLS ELECTRONIC CO.,L TD.	
X. ±3°	Date	2018-03-01		
.X ±2°	SHEET	1 OF 1		
.XX ±1°				