
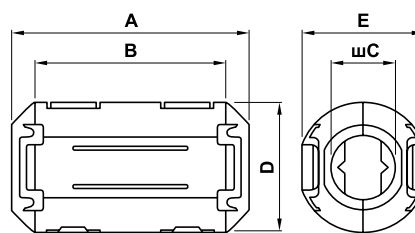


INTERNAL CONSTRUCTION

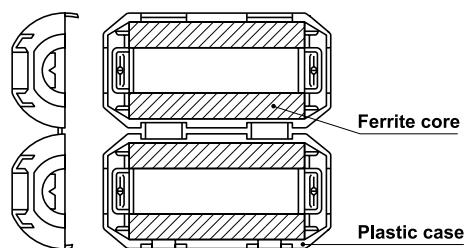

Part No.	A	B	$\varnothing C$	$\varnothing D$	E	Applicable cable outer dia.	Dimensions in mm	
							Weight(g)	Impedance
								freq. characteristics Fig.
ZCAT1518-0730	22 $\pm$ 1	18 $\pm$ 1	7 $\pm$ 1	15 $\pm$ 1	—	7max.	6	1
ZCAT2032-0930	36 $\pm$ 1	32 $\pm$ 1	9 $\pm$ 1	19.5 $\pm$ 1	—	9max.	22	3
ZCAT2132-1130	36 $\pm$ 1	32 $\pm$ 1	11 $\pm$ 1	20.5 $\pm$ 1	—	11max.	22	4
ZCAT3035-1330	39 $\pm$ 1	34 $\pm$ 1	13 $\pm$ 1	30 $\pm$ 1	—	13max.	63	5
ZCAT1730-0730A	30 $\pm$ 1	23 $\pm$ 1	7 $\pm$ 1	16.5 $\pm$ 1	15 $\pm$ 1	4 to 7(USB/IEEE1394)	12	6
ZCAT2035-0930A	35 $\pm$ 1	28 $\pm$ 1	9 $\pm$ 1	19.5 $\pm$ 1	17.4 $\pm$ 1	6 to 9	22	3
ZCAT2436-1330A	36 $\pm$ 1	29 $\pm$ 1	13 $\pm$ 1	23.5 $\pm$ 1	22 $\pm$ 1	10 to 13	29	8