

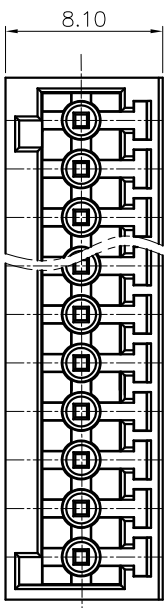


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

8P and 8P following no reinforcement.

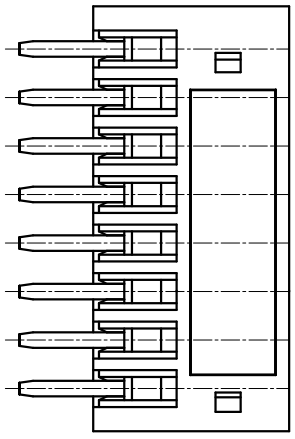

02P

- NOTES1:  
 UL Standard  
 1. Rated voltage/current : 150V / 4A  
 2. Withstanding voltage : AC1500V/1Min.  
 IEC Standard  
 1. Pollution degree 2


Overvoltage category	II
Rate Impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	5A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 2.5mm, Poles : N=02~12P  
 3. Operating temperature: -40°C~+105°C  
 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		-	/	D
	Over	Over			
6	TO	10	30	60	100
10	TO	24	60	100	150
10	TO	30	60	100	150
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30					±2°

5. RoHS Compliance






15EDGVC - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Color) : 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

(Single Pitch)

00A - (Standard)  
 (RoHS)

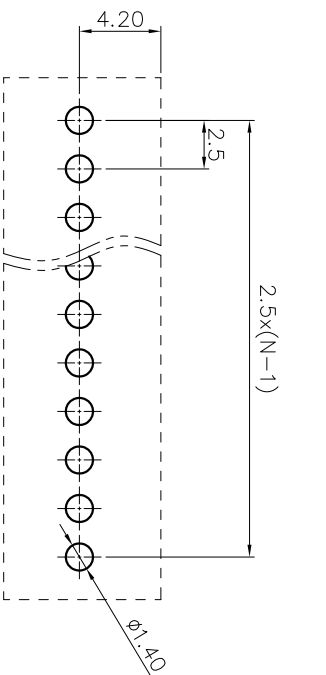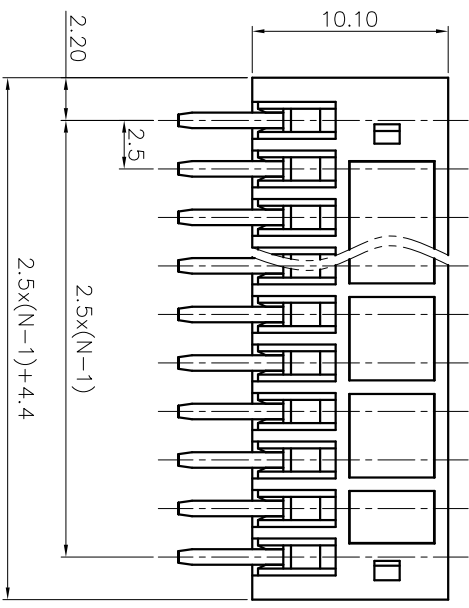

PCB LAYOUT

A 8  
 B 7  
 C 6  
 D 5  
 E 4  
 F 3  
 G 2  
 H 1

DETACHED LISTS			
PART NO.:	/	DEGSON	NINGBO DEGSON ELECTRICAL CO., LTD
NAME:	15EDGVC-2.5-XXP-1Y-00A(H)	宁波高松电子有限公司	
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1