



## Micro-MaTch Box Plug IDC Type

### SPECIFICATION

Current Rate:1.0 AMP  
 Insulation Resistance:100MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

### MATERIAL

Insulator:Polyester,UL 94V-0  
 ☒ Standard:Nylon 46  
 Contact Pin:Copper Alloy

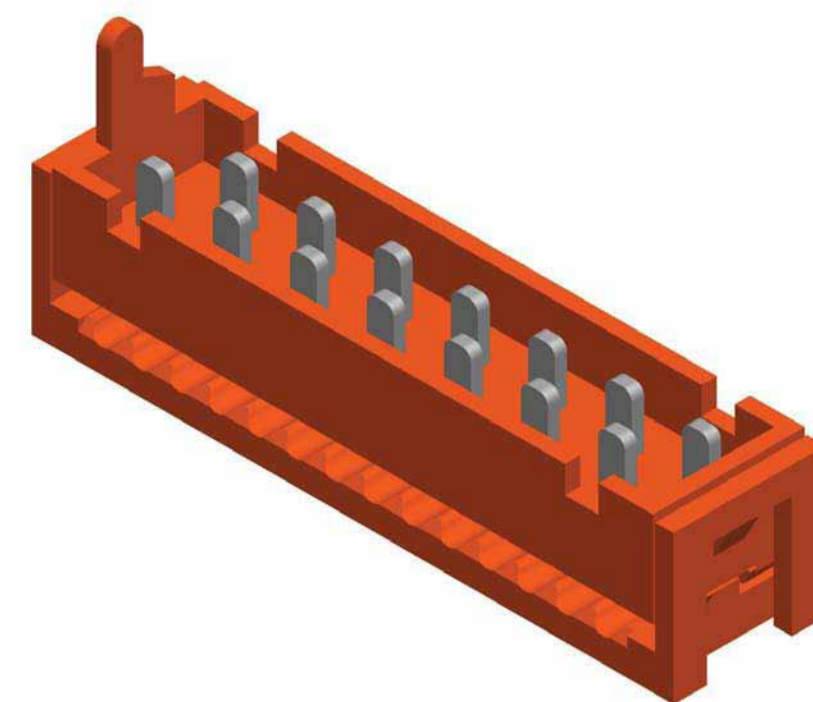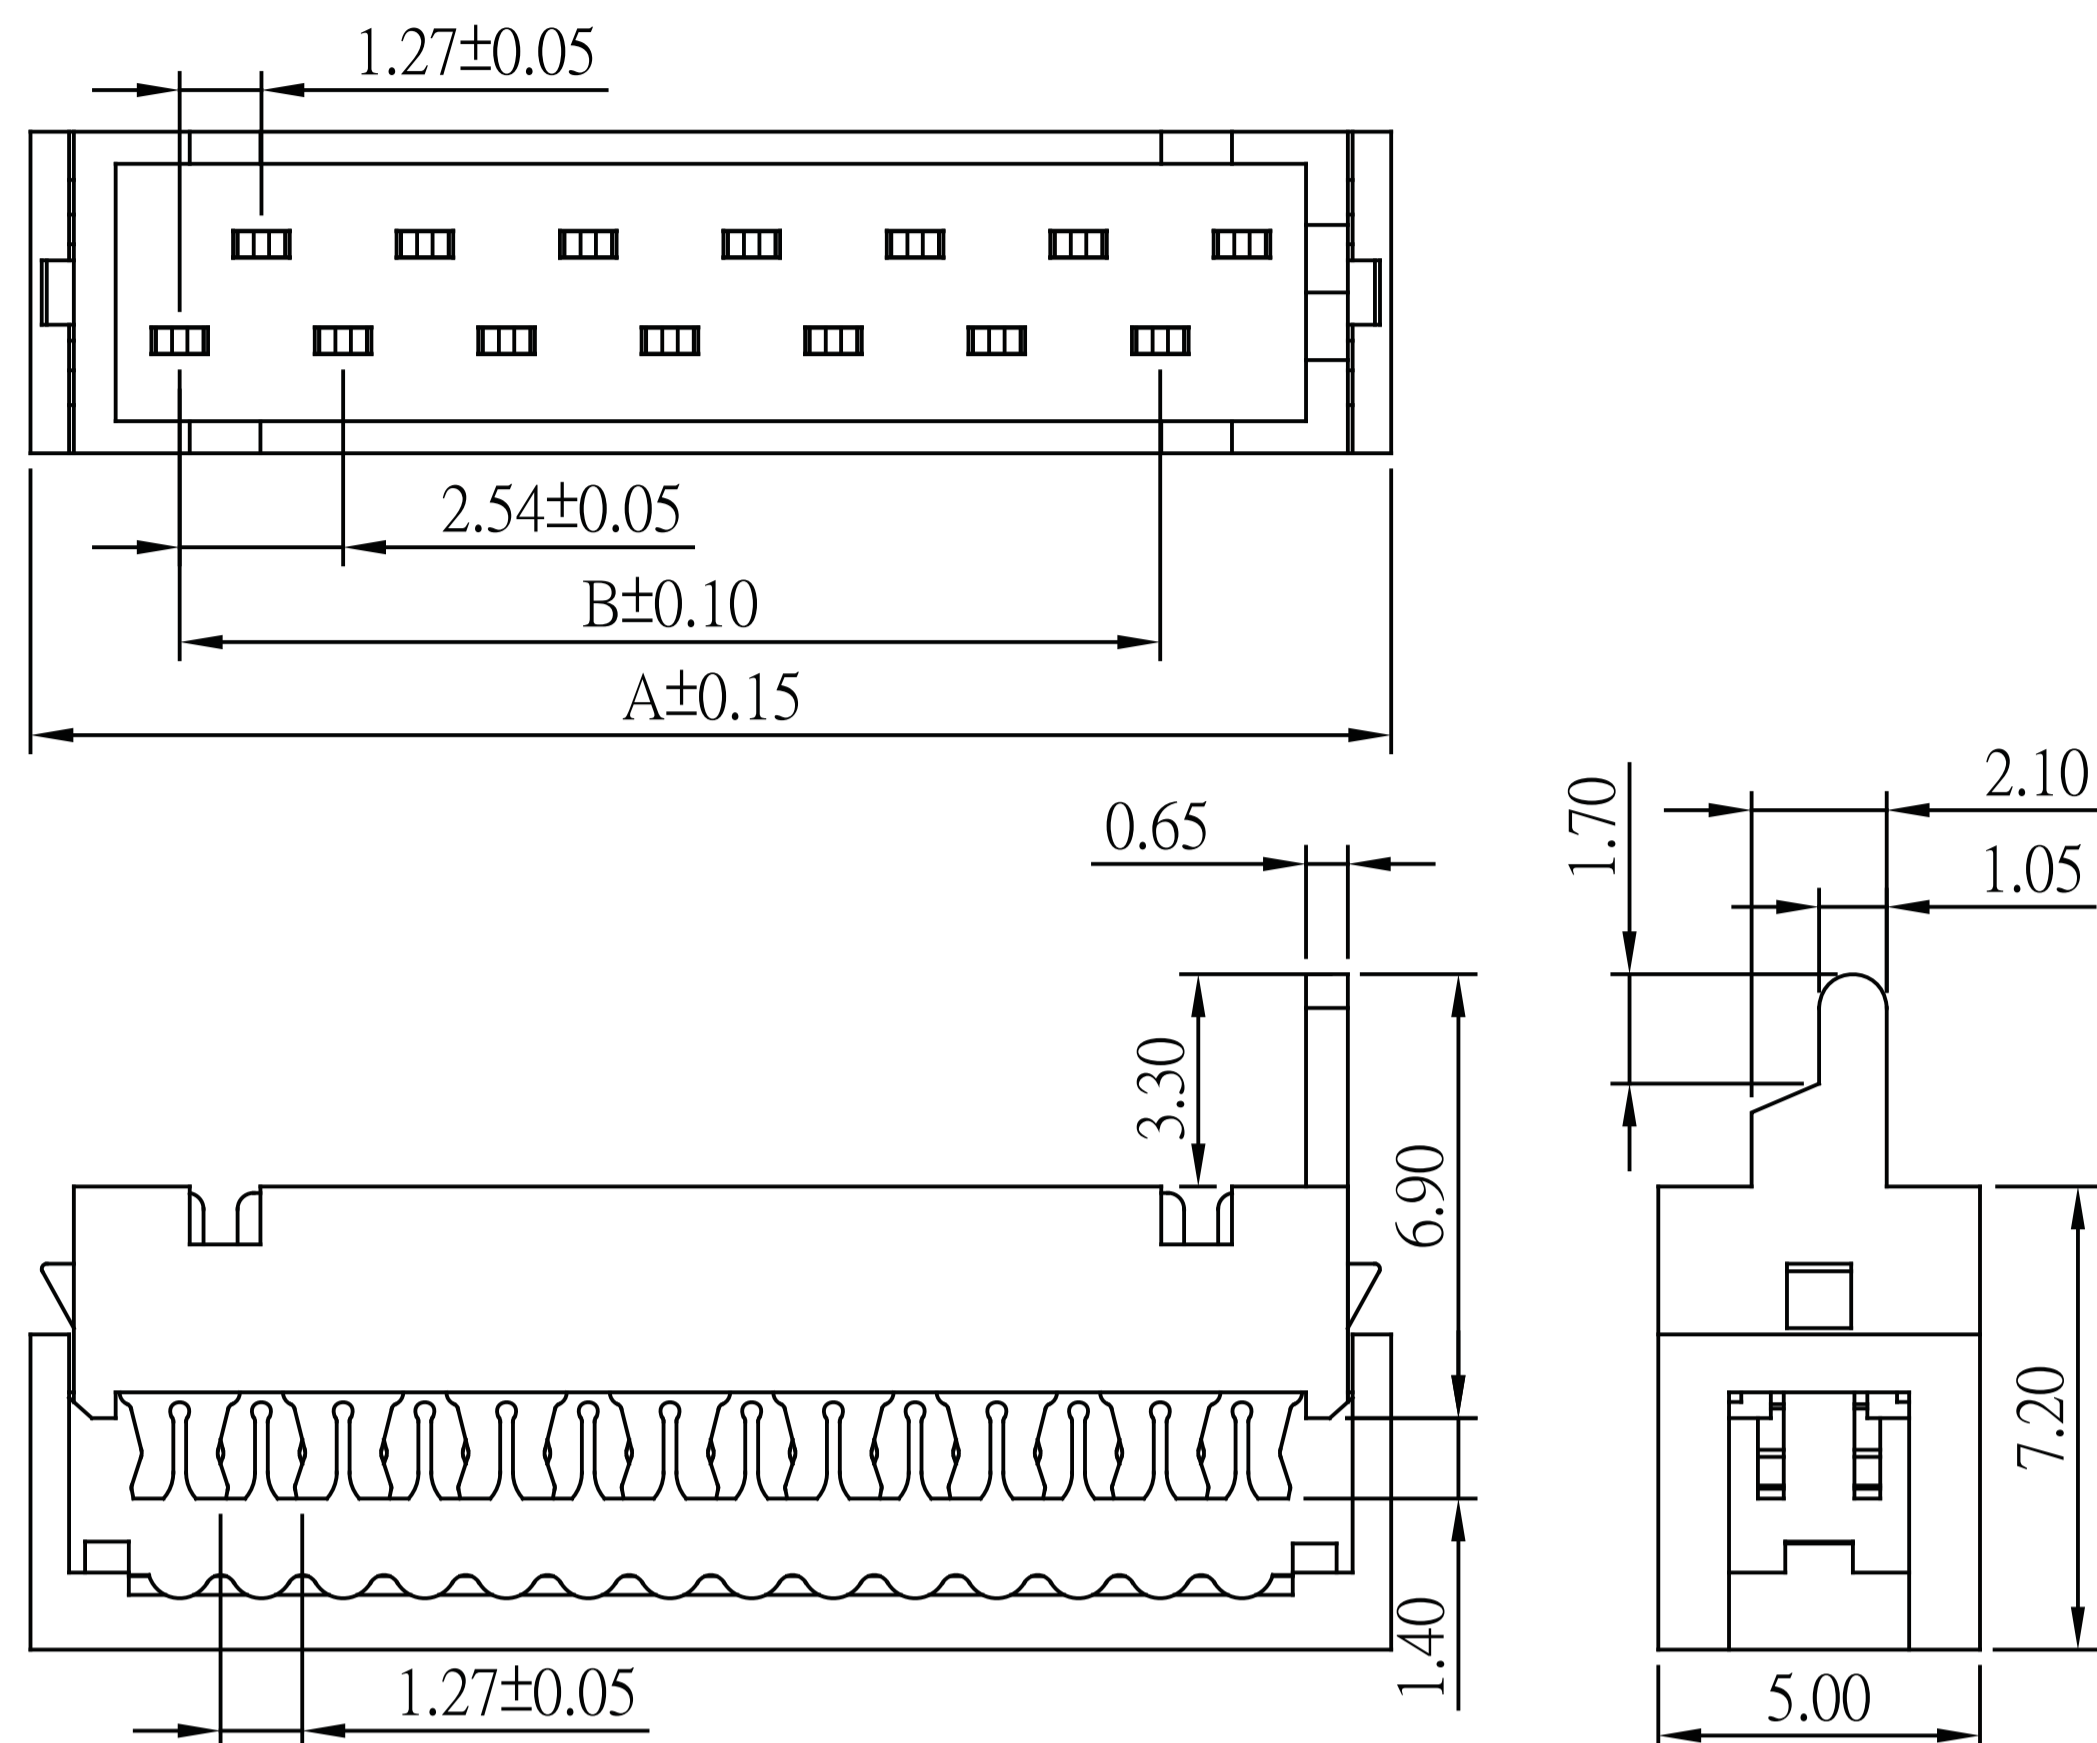

☒ Mate with flat cable Pitch 1.27 mm

No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.:MIBPI3-XX-TR-U



## Micro-MaTch Dip Plug IDC Type

### SPECIFICATION

Current Rate:1 AMP  
 Insulation Resistance:100MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

### MATERIAL

Insulator:Polyester,UL 94V-0  
 ☒ Standard:Nylon 46  
 Contact Pin:Copper Alloy

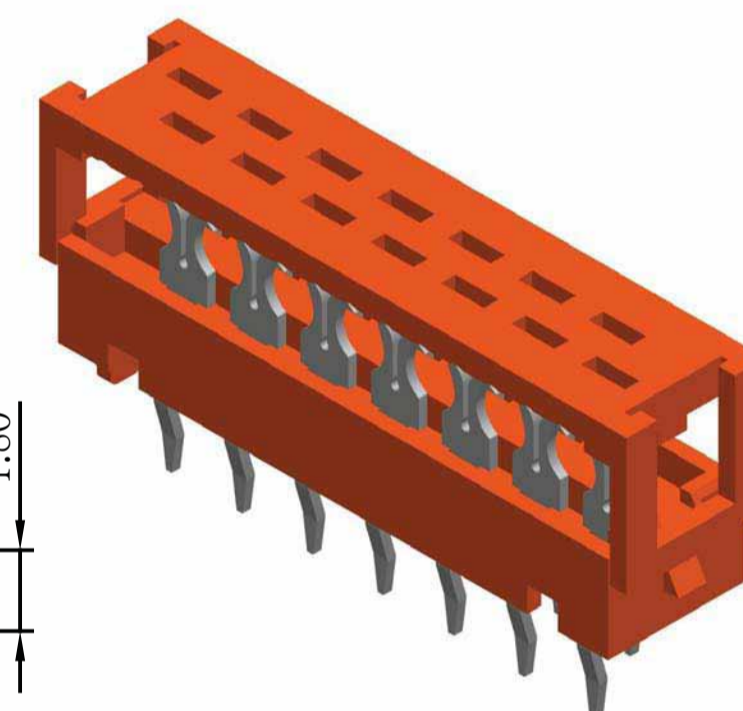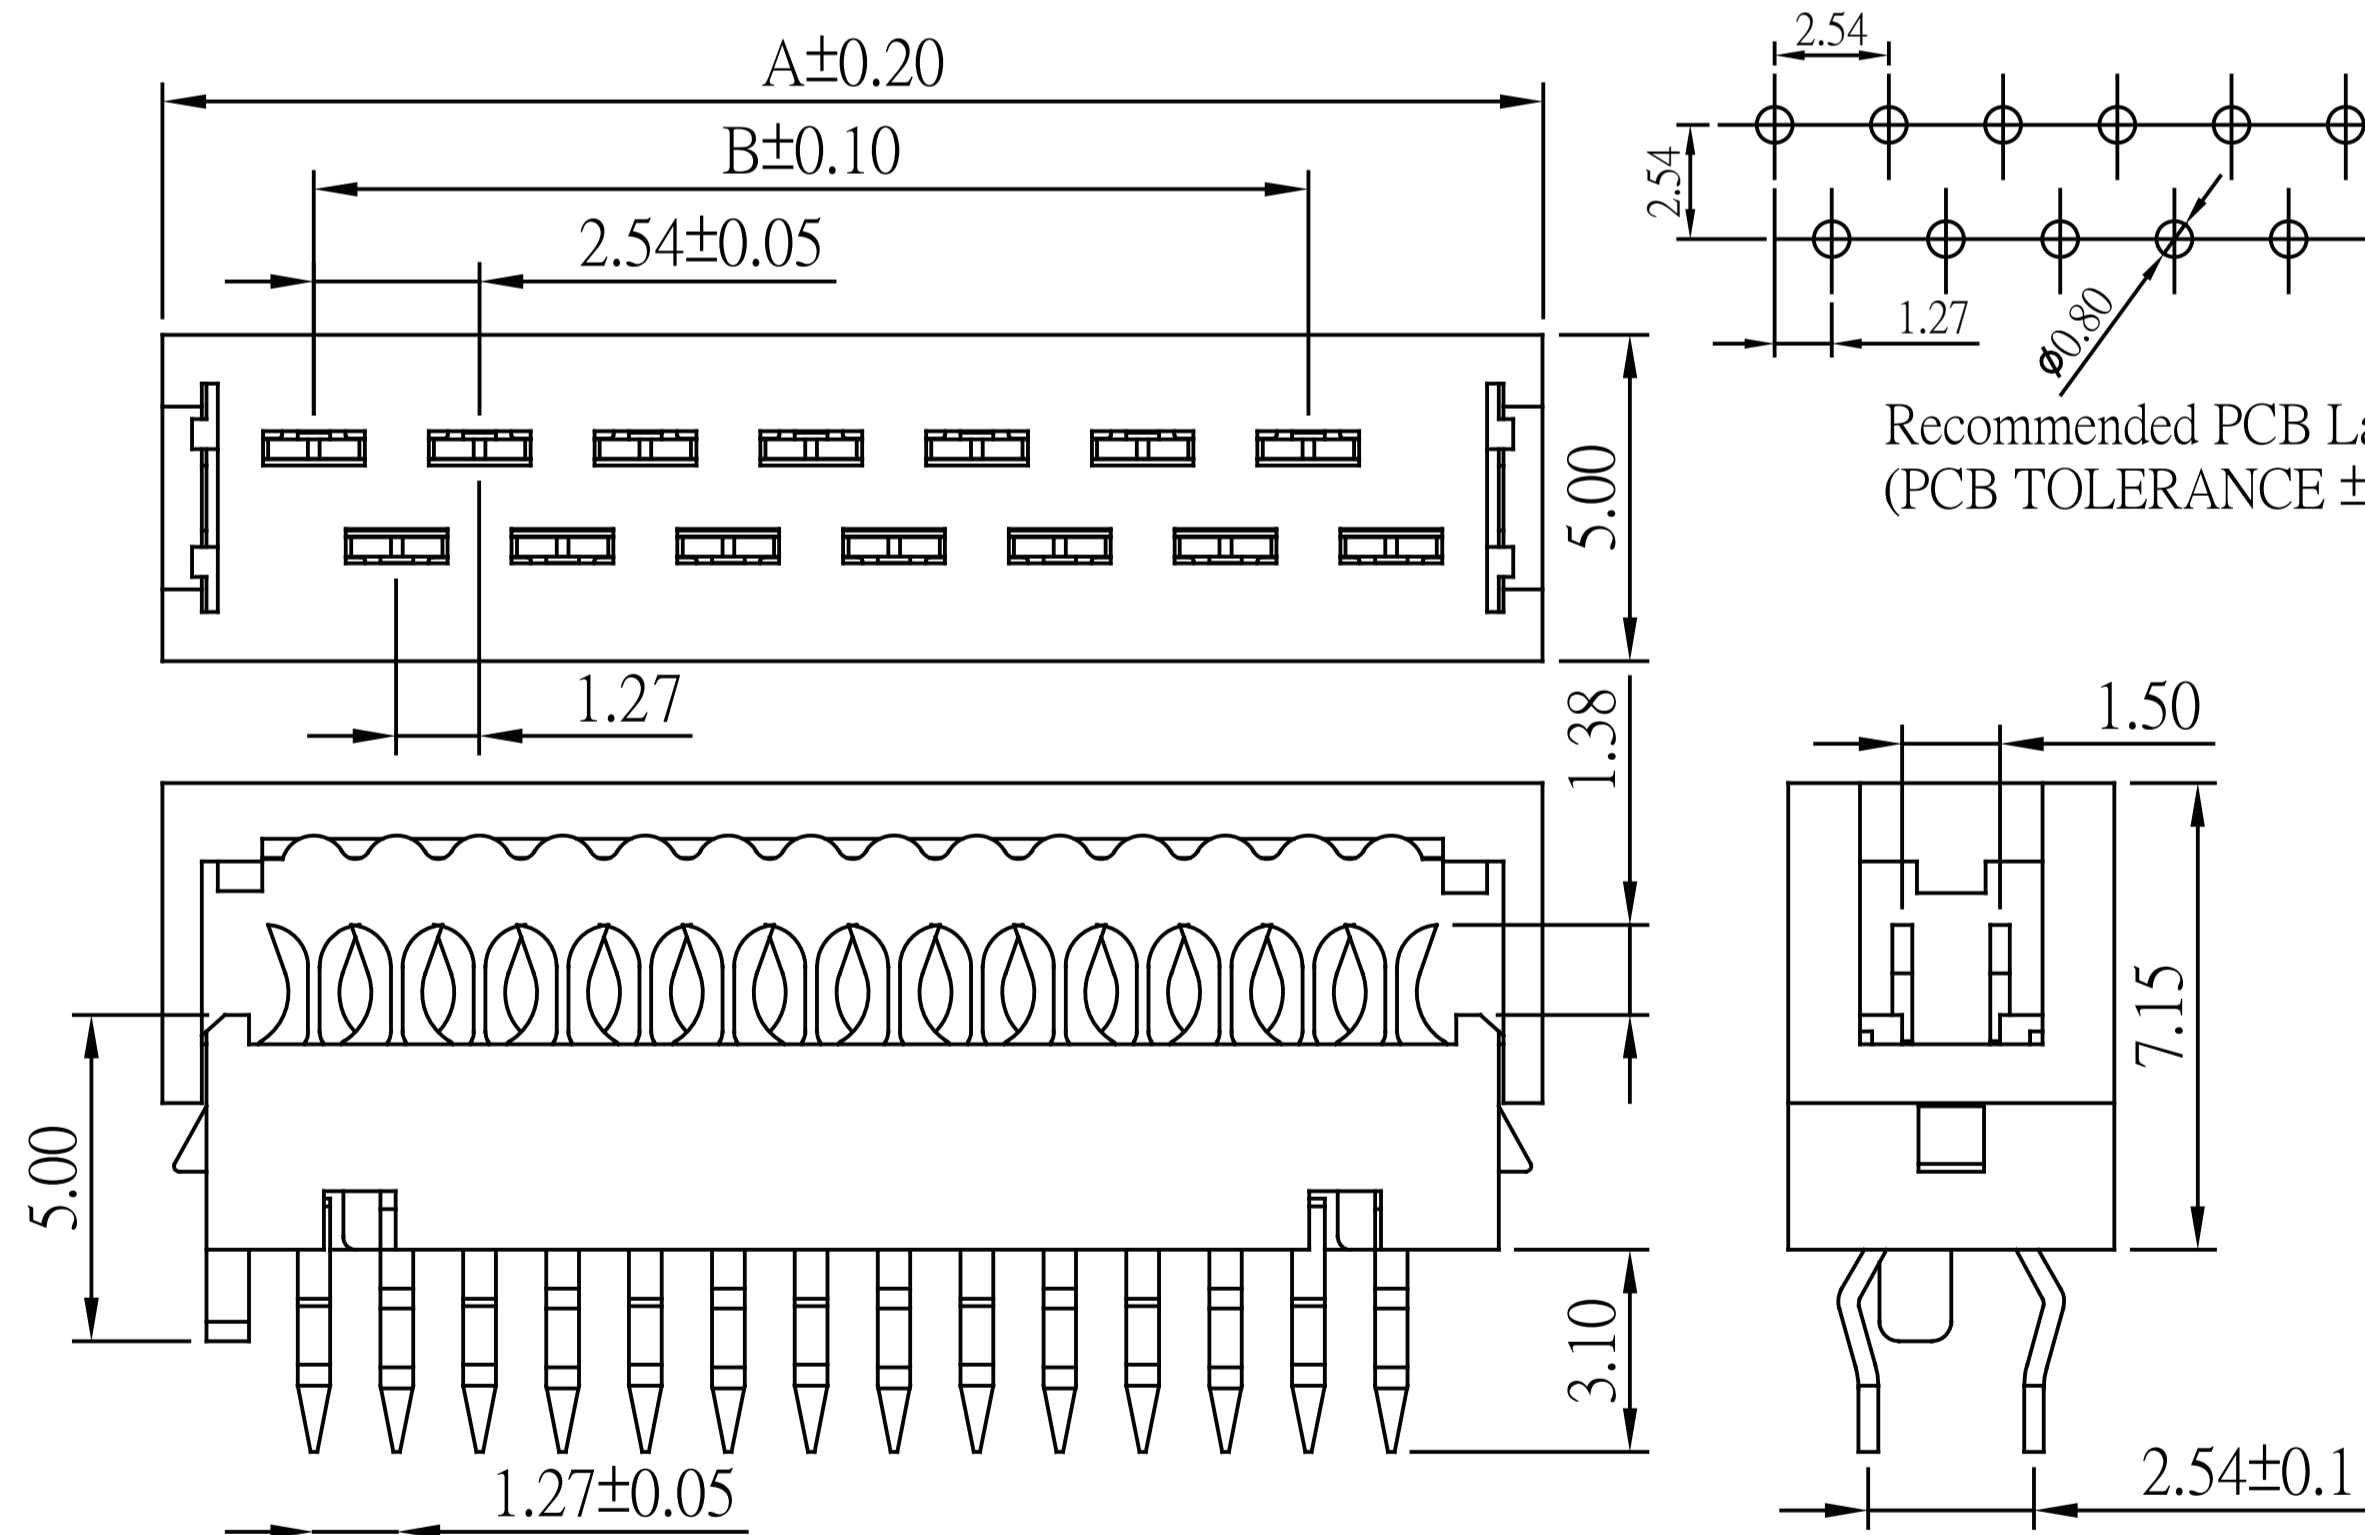

☒ Mate with flat cable Pitch 1.27 mm

No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.:MIDPI3-XX-TR-U

## ORDER INFORMATION

