

**Product Code:**


L-KLS3-MT-9.6\*05



**Picture:**



**Frequency Response:**

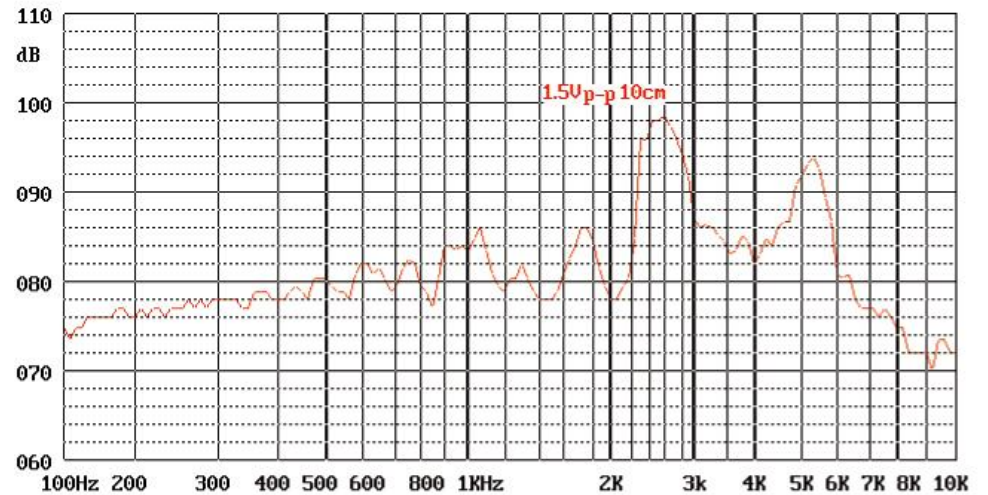

**Specification:**

Rated Voltage	(Vo-p)	1.5
Operating Voltage	(Vo-p)	1~2
*Rated Current	(mA)	≤100
Coil Resistance	(Ω)	5.5±1
*Sound Output at 10cm	(dB)	≥90
Resonance Frequency	(Hz)	2731
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	0.6
Housing Material		PPO
RoHS		Yes

\*Applying rated voltage and resonant frequency( 1/2 duty square wave);

Test basic state: Temp(20±2°C), Humidity(40~70%RH), Air pressure(860~1060hPa).

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

