



# MBR1635 THRU MBR16100

## 肖特基二极管 Schottky Rectifier

### ■特征 Features

- $I_o$  16A
- $V_{RRM}$  35V-100V
- 耐正向浪涌电流能力高  
High surge current capability
- 封装: 模压塑料  
Cases: Molded plastic

### ■用途 Applications

- 整流用 Rectifier

### ■极限值 (绝对最大额定值)

#### Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	MBR16					
				35	45	50	60	90	100
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V		35	45	50	60	90	100
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载, $T_c(\text{Fig.1})$ 60HZ Half-sine wave, Resistance load, $T_c(\text{Fig.1})$	16.0					
正向 (不重复) 浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	正弦半波 60Hz, 一个周期, $T_a=25^\circ\text{C}$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$	150			250		
结温 Junction Temperature	$T_J$	$^\circ\text{C}$		-55~+150					
储存温度 Storage Temperature	$T_{STG}$	$^\circ\text{C}$		-55 ~ +150					

### ■电特性 (Ta=25°C 除非另有规定)

#### Electrical Characteristics ( $T_a=25^\circ\text{C}$ Unless otherwise specified)


参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	MBR16					
				35	45	50	60	90	100
正向峰值电压 Peak Forward Voltage	$V_F$	V	$I_F=16.0\text{A}$	0.65		0.75		0.85	
反向漏电流 Peak Reverse Current	$I_{RRM1}$	mA	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$		0.2		1.0	
	$I_{RRM2}$			$T_a=125^\circ\text{C}$		40		50	
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-C}$	$^\circ\text{C/W}$	结和壳之间 Between junction and case	3.0 <sup>1)</sup>					

### 备注: Notes:

1) 热电阻从结到本体,每管脚到散热片的尺寸为 2"×3"×0.25 的铝板

Thermal resistance from junction to case per leg with heat-sink size of 2"×3"×0.25" AL-plate

### ■外形尺寸和印记 Outline Dimensions and Mark

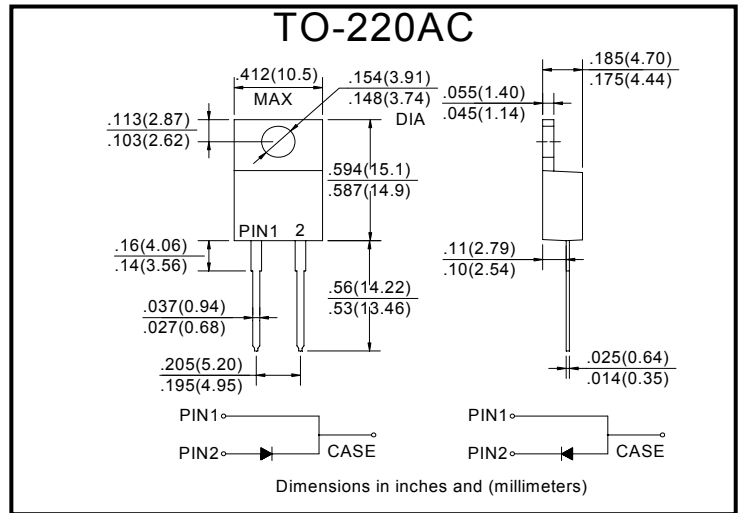



## ■特性曲线（典型） Characteristics(Typical)

图1: 正向电流降额曲线  
FIG.1: FORWARD CURRENT DERATING CURVE

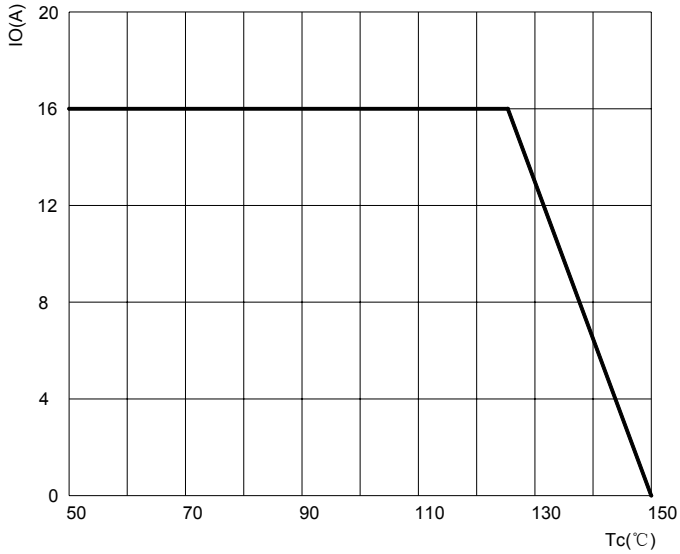


图2: 最大正向浪涌冲击耐受能力  
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

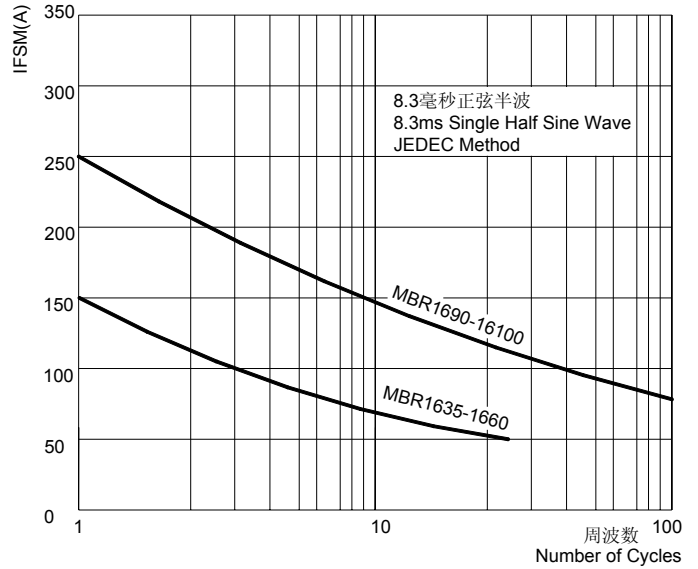


图3: 典型正向特性曲线  
FIG.3: TYPICAL FORWARD CHARACTERISTICS

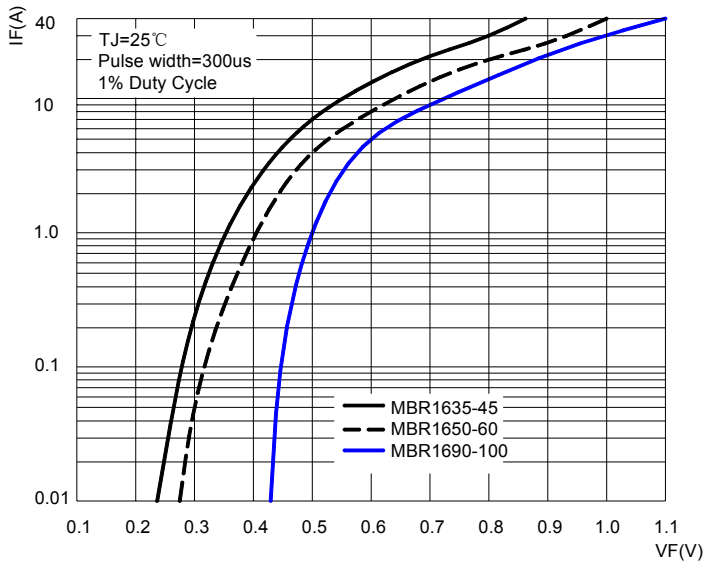


图4: 典型反向特性曲线  
FIG.4: TYPICAL REVERSE CHARACTERISTICS

