

1W isolated DC-DC converter

Fixed input voltage, unregulated single output



FEATURES

- Continuous short-circuit protection
- No-load input current as low as 5mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- Compact SMD package
- I/O isolation test voltage 3k VDC
- Industry standard pin-out
- IEC62368, UL62368, EN62368 approved

F05_XT-1WR3 series are designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection G	Juide									
		Input Voltage (VDC)	Output		Output		Output		Full Load	Capacitive Load
Certification	Part No.	Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.	Efficiency (%) Min./Typ.	(μF)Max.				
	F0503XT-1WR3		3.3	303/30	70/74	2400				
	F0505XT-1WR3	F0505XT-1WR3		5	200/20	78/82	2400			
UL/CE/CB F051	F0509XT-1WR3	5	9	111/12	79/83	1000				
	F0512XT-1WR3	(4.5-5.5)	12	84/9	79/83	560				
	F0515XT-1WR3		15	67/7	79/83	560				
	F0524XT-1WR3		24	42/4	81/85	220				

Input Specifications							
Item	Operating Condition	Operating Conditions		Тур.	Max.	Unit	
Input Current (full load / no-load)		3.3VDC/5VDC output		270/5	286/10		
	5VDC input	9VDC/12VDC output		241/12	254/20	mA	
		15VDC/24VDC output		241/18	254/30		
Reflected Ripple Current*				15		mA	
Surge Voltage (1sec. max.)	5VDC input		-0.7		9	VDC	
Input Filter				Capacit	ance filter		
Hot Plug			Unavailable				
Note: * Please refer to DC-DC Con	verter Application Note fo	or detailed description of reflected ripp	le current testi	ng method.			

Output Specificat	ions					
Item	Operating Conditions	Operating Conditions			Max.	Unit
Voltage Accuracy					ation curve (F	ig. 1)
Linear Regulation	Input voltage change:	3.3VDC output			1.5	0/ 10/
	±1%	Other outputs			1.2	%/%
		3.3VDC output		15	20	~~~~%
		5VDC output		10	15	
Lead Desudation		9VDC output		8	10	
Load Regulation	10%-100% load	12VDC output		7	10	
		15VDC output		6	10	
		24VDC output		5	10	
Ripple & Noise*		Other outputs		30	75	
	20MHz bandwidth	24VDC output		50	100	mVp-p

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.10.18-A/4

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

DC/DC Converter F05_XT-1WR3 Series

MORNSUN[®]

Temperature Coefficient	Full load	 ±0.02		%/ ℃
Short-circuit Protection		Continuous,	self-recovery	


Note:* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.


Item	Operating Condition	IS	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric leakage current of 1	3000			VDC	
Insulation Resistance	Input-output resistan	ce at 500VDC	1000			MΩ
Isolation Capacitance	Input-output capaci		20		pF	
Operating Temperature	For derating with ten	-40		105		
Storage Temperature			-55		125	~
	T a=25 ℃	3.3VDC output		25		- °C
Case Temperature Rise		Other outputs		15		
Storage Humidity	Non-condensing	'			95	%RH
Reflow Soldering Temperature*			Peak temp. over 217°C	≪ 245 °C, max	imum duratio	n time≤60s
Switching Frequency	Full load, nominal inp	out voltage		270		KHz
MTBF	MIL-HDBK-217F@25°C		3500			K hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1		Level 1			

Mechanical Specifications	
Case Material	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
Dimensions	13.20 x 11.40 x 7.25 mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)							
Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)					
ETTISSIONS	RE	CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)					
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±4kV perf. Criteria B					

Typical Characteristic Curves

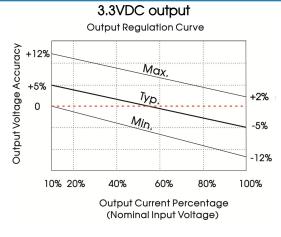

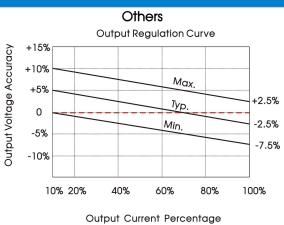


(Nominal Input Voltage)

Fig. 1



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.10.18-A/4 Page 2 of 5

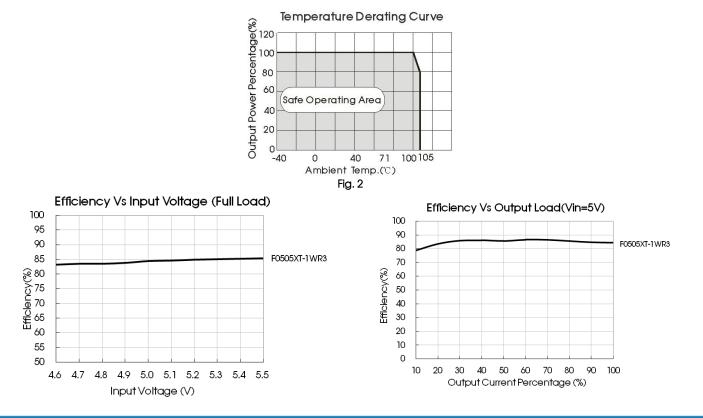

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.





Table 1: Recommended input and output capacitor values								
Vin(VDC)	Cin(µF)	Vo (VDC)	Cout(µF)					
	5 4.7	3.3/5	10					
		9	4.7					
5		12	2.2					
		15	1					
		24	0.47					

MORNSUN®

2. EMC (CLASS B) compliance circuit



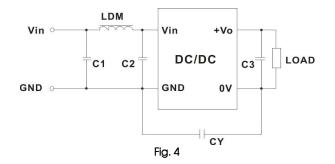

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.



MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

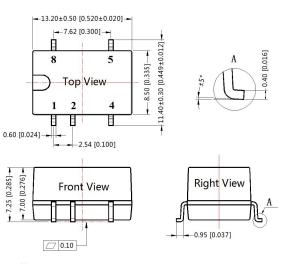


	Table 2: Re	commended EMC f	îlter values
Output v	oltage(VDC)	3.3/5/9	12/15/24
	C1/C2	4.7µF /25V	4.7µF /25V
Input voltage 5VDC Emissions	СҮ		1nF/4KVDC VISHAY HGZ102MBP TDK CD45-E2GA102M-GKA
	C3	Refer	to the Cout in table 1
	LDM	6.8µH	6.8µH
		Output voltage(VDC) Emissions C1/C2 CY C3	Emissions C1/C2 4.7µF /25V CY C3 Refer

Note: In the case of actual use, the requirements for Emissions are high, it is subject to CY.

3. For additional information, please refer to DC-DC converter application notes on <u>www.mornsun-power.com</u>

Dimensions and Recommended Layout



THIRD ANGLE PROJECTION

Note: Grid 2.54*2.54mm

Pir	n-Out
Pin	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Note: Unit: mm[inch] Pin section tolerances: ±0.10[±0.004]


General tolerances: ±0.25[±0.010]

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.10.18-A/4 Page 4 of 5



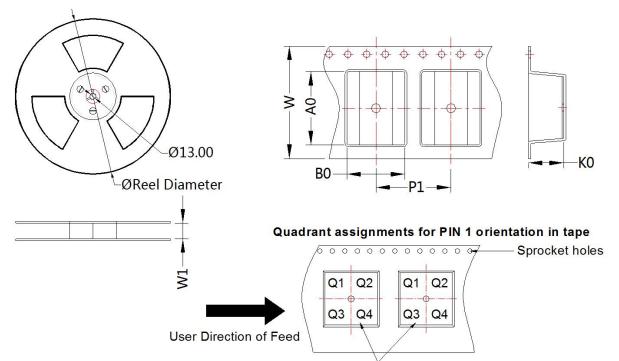

Pocket Quadrants

Device	Package Type	Pin	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
F05_XT-1WR3	SMD	5	500	330.0	24.5	13.4	11.7	7.5	16.0	24.0	Q1

Notes:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. The maximum capacitive load offered were tested at input voltage range and full load;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C , humidity<75%RH with nominal input voltage and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

MORNSUN[®]

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.10.18-A/4 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation