

BAT54 / A / C / S 👫


## SURFACE MOUNT SCHOTTKY BARRIER DIODE

### **Features**


- Low Turn-on Voltage
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection
- **Designed for Surface Mount Application**
- Plastic Material UL Recognition Flammability Classification 94V-O

## **Mechanical Data**

- Case: SOT-23, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Mounting Position: Any
- Lead Free: For RoHS / Lead Free Version, Add "-LF" Suffix to Part Number, See Page 4



G



| SOT-23 |       |       |  |  |
|--------|-------|-------|--|--|
| Dim    | Min   | Max   |  |  |
| Α      | 0.37  | 0.51  |  |  |
| В      | 1.19  | 1.40  |  |  |
| С      | 2.10  | 2.50  |  |  |
| D      | 0.89  | 1.05  |  |  |
| ш      | 0.45  | 0.61  |  |  |
| G      | 1.78  | 2.05  |  |  |
| Н      | 2.65  | 3.05  |  |  |
| J      | 0.013 | 0.15  |  |  |
| к      | 0.89  | 1.10  |  |  |
| L      | 0.45  | 0.61  |  |  |
| М      | 0.076 | 0.178 |  |  |

All Dimensions in mm







TOP VIEW BAT54 Marking: L4

TOP VIEW BAT54A Marking: L42

TOP VIEW

BAT54C Marking: L43 BAT54S Marking: L44

## Maximum Ratings and Electrical Characteristics, Single Diode @TA=25°C unless otherwise specified

| Characteristic   |                    | Symbol             | Value       | Unit |
|--|--------------------|--------------------|-------------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage |                    | Vrrm<br>Vrwm<br>Vr | 30          | V    |
| Forward Continuous Current (Note 1)  |                    | lF                 | 200         | mA   |
| Repetitive Peak Forward Current (Note 1)   |                    | IFRM               | 300         | mA   |
| Forward Surge Current (Note 1)   | @ t < 1.0s         | IFSM               | 600         | mA   |
| Power Dissipation (Note 1)   |                    | Pd                 | 200         | mW   |
| Typical Thermal Resistance, Junction to Am   | bient Air (Note 1) | RθJA               | 500         | K/W  |
| Operating and Storage Temperature Range  |                    | Тј, Тѕтс           | -65 to +125 | °C   |


Note: 1. Device on fiberglass substrate.

# Maximum Ratings and Electrical Characteristics, Single Diode @T\_=25°C unless otherwise specified

| Characteristic            | Symbol | Min | Тур | Мах                              | Unit | Test Condition   |
|---------------------------|--------|-----|-----|----------------------------------|------|--|
| Reverse Breakdown Voltage | V(BR)R | 30  | —   | —                                | V    | @ I <sub>RS</sub> = 100µA  |
| Forward Voltage           | VF     | _   | _   | 240<br>320<br>400<br>500<br>1000 | mV   | tp < 300µs, duty cycle < 2%<br>@ $I_F = 0.1mA$<br>@ $I_F = 1mA$<br>@ $I_F = 10mA$<br>@ $I_F = 30mA$<br>@ $I_F = 100mA$ |
| Reverse Leakage Current   | IR     | _   | _   | 2.0                              | μA   | $t_P < 300\mu s$ , duty cycle < 2%<br>@ V <sub>R</sub> = 25V   |
| Junction Capacitance      | Cj     | _   | —   | 10                               | pF   | V <sub>R</sub> = 1.0V, f = 1.0MHz  |
| Reverse Recovery Time     | trr    | _   | _   | 5.0                              | nS   | $I_F$ = 10mA through $I_R$ = 10mA to $I_R$ = 1.0mA, $R_L$ = 100 $\Omega$   |

#### MARKING INFORMATION **RECOMMENDED FOOTPRINT** f 0.035 (0.90) ♦ 0.079 (2.0) **↑** 0.035 Lx = Device Code = 4 (BAT54) (0.90) х 42 (BAT54A) ♦ 43 (BAT54C) 0.031 0.037 44 (BAT54S) (0.8) (0.95) inches(mm)

## PACKAGING INFORMATION

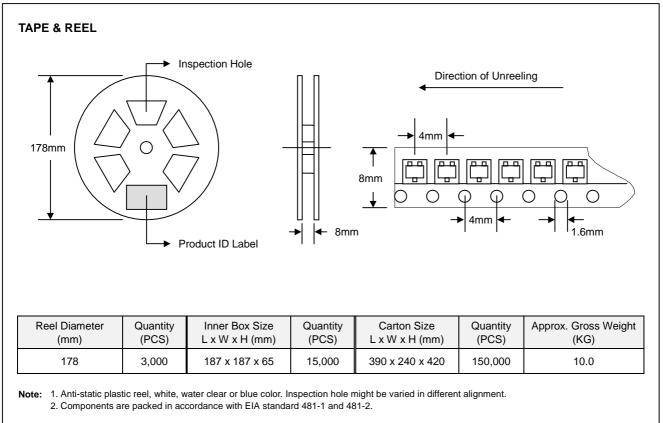

#### **ORDERING INFORMATION**

| Product No. | Package Type | Shipping Quantity |
|-------------|--------------|-------------------|
| BAT54-T1    | SOT-23       | 3000/Tape & Reel  |
| BAT54A-T1   | SOT-23       | 3000/Tape & Reel  |
| BAT54C-T1   | SOT-23       | 3000/Tape & Reel  |
| BAT54S-T1   | SOT-23       | 3000/Tape & Reel  |

1. Shipping quantity given is for minimum packing quantity only. For minimum

order quatity, please consult the Sales Department. To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, BAT54-T1-LF. 2.

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd. No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan Phone: 886-7-822-5408 or 886-7-822-5410 Fax: 886-7-822-5417 Email: sales@wontop.com Internet: http://www.wontop.com

We power your everyday.