

### HIGH EFFICIENCY RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V  
CURRENT: 3.0 A


#### FEATURES

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO--27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL- STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

#### DO - 27

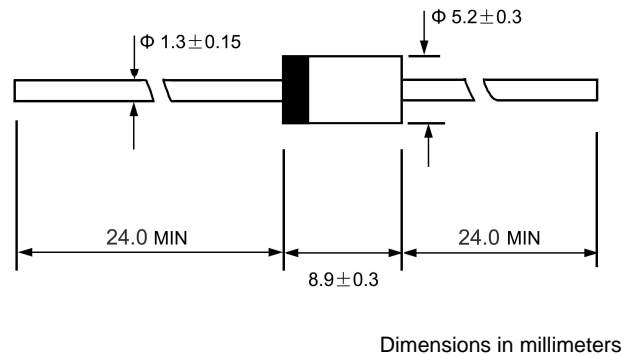

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		HER 301	HER 302	HER 303	HER 304	HER 305	HER 306	HER 307	HER 308	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	3.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	$I_{FSM}$	200.0					150.0			A
Maximum instantaneous forward voltage @ 3.0 A	$V_F$	1.0		1.3		1.7			V	
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	$I_R$	10.0 150.0								$\mu A$
Maximum reverse recovery time (Note1)	$t_{rr}$	50					75			ns
Typical junction capacitance (Note2)	$C_J$	70					50			pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	30								$^\circ C/W$
Operating junction temperature range	$T_J$	- 55 ---- + 150								$^\circ C$
Storage temperature range	$T_{STG}$	- 55 ---- + 150								$^\circ C$



NOTE: 1. Measured with  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_T=0.25A$ .

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient.

www.galaxycn.com


**FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

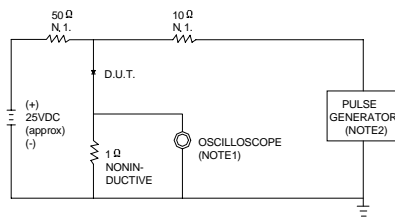


NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE =  $1M\Omega$ , 22pF.  
 2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE =  $50\Omega$ .

SET TIME BASE FOR 10/20 ns/cm


**FIG.2 – TYPICAL FORWARD CHARACTERISTIC**

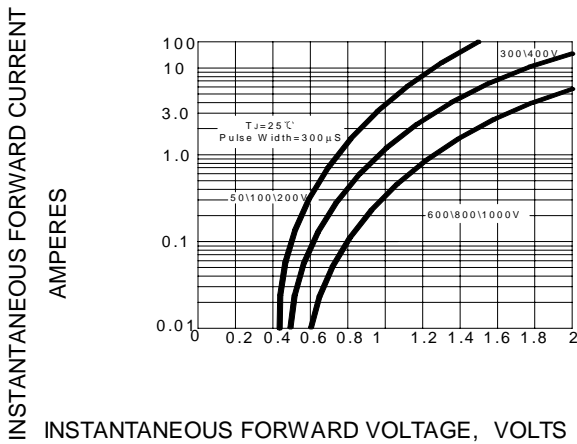

**FIG.3 – FORWARD DERATING CURVE**

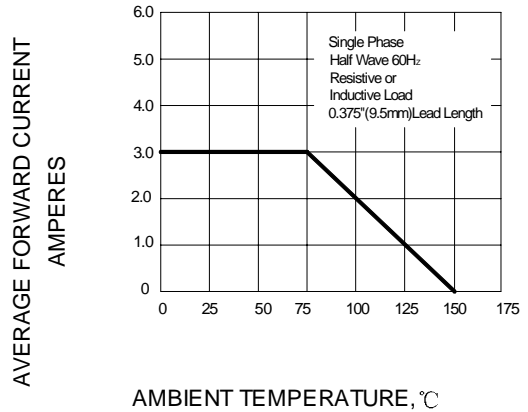

**FIG.4 – TYPICAL JUNCTION CAPACITANCE**

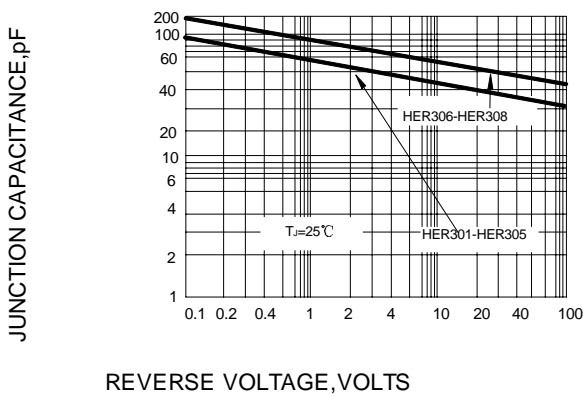

**FIG.5 – PEAK FORWARD SURGE CURRENT**

