




#### ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Isolation class II
- LED indicator for power on
- No load power consumption<1W
- 100% full load burn-in test
- 3 years warranty



#### SPECIFICATION


MODEL		DR-100-12		DR-100-15		DR-100-24	
OUTPUT	DC VOLTAGE	12V		15V		24V	
	RATED CURRENT	7.5A		6.5A		4.2A	
	CURRENT RANGE	0 ~ 7.5A		0 ~ 6.5A		0 ~ 4.2A	
	RATED POWER	90W		97.5W		100.8W	
	RIPPLE & NOISE (max.) <small>Note.2</small>	120mVp-p		120mVp-p		150mVp-p	
	VOLTAGE ADJ. RANGE	12 ~ 15V		15 ~ 18V		24 ~ 29V	
	VOLTAGE TOLERANCE <small>Note.3</small>	±2.0%		±1.0%		±1.0%	
	LINE REGULATION	±1.0%		±1.0%		±1.0%	
	LOAD REGULATION	±1.0%		±1.0%		±1.0%	
	SETUP, RISE TIME	2700ms, 80ms/230VAC		2700ms, 80ms/115VAC at full load			
	HOLD UP TIME (Typ.)	50ms/230VAC		18ms/115VAC at full load			
INPUT	VOLTAGE RANGE	88 ~ 264VAC		124 ~ 370VDC			
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	87%		87%		89%	
	AC CURRENT (Typ.)	3A/115VAC		1.6A/230VAC			
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC		45A/230VAC			
PROTECTION	OVERLOAD	105 ~ 135% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	OVER VOLTAGE	16 ~ 20V		19 ~ 23V		30 ~ 35V	
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	90°C ±15°C (RTH2) detect on heatsink of power transistor Protection type : Shut down o/p voltage, re-power on to recover					
ENVIRONMENT	WORKING TEMP.	-20 ~ +60°C (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6					
SAFETY & EMC <small>(Note 4)</small>	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved, Design refer to EN50178					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms/500VDC 25°C 70%RH					
	EMI CONDUCTION & RADIATION	Compliance to EN61204-3					
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3					
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, ENV50204, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A					
OTHERS	MTBF	486K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	100*93*56mm (W*H*D)					
	PACKING	0.35Kg; 36pcs/13.6Kg/1.1CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.						

### Mechanical Specification



Case No.970A Unit:mm

Terminal Pin No. Assignment


Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5,6	-V
2	AC/L	7	LED
3,4	+V	8	+V ADJ.

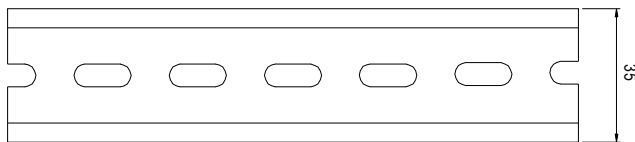


ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

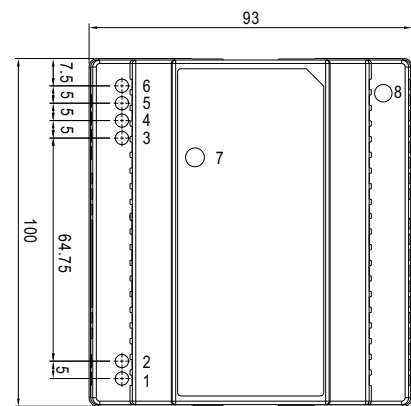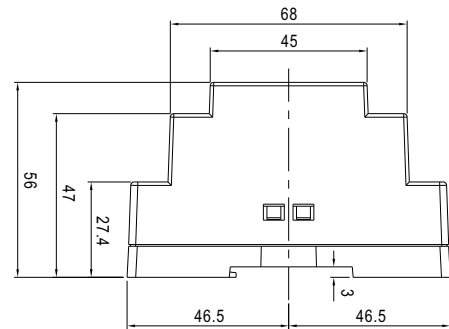

### Block Diagram

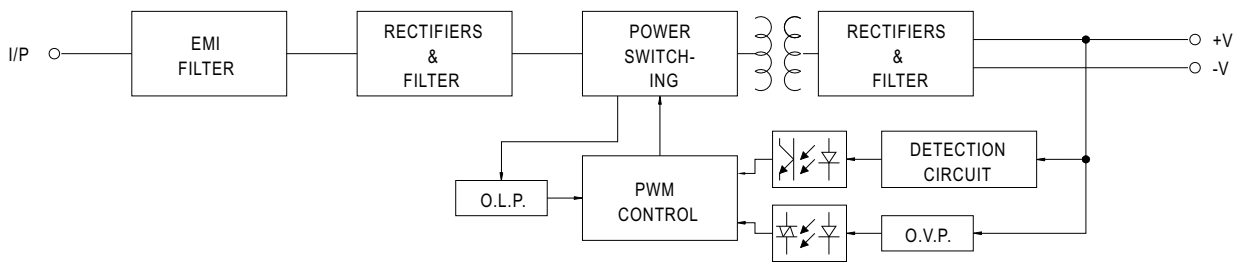

### Derating Curve VS Ambient Temperature

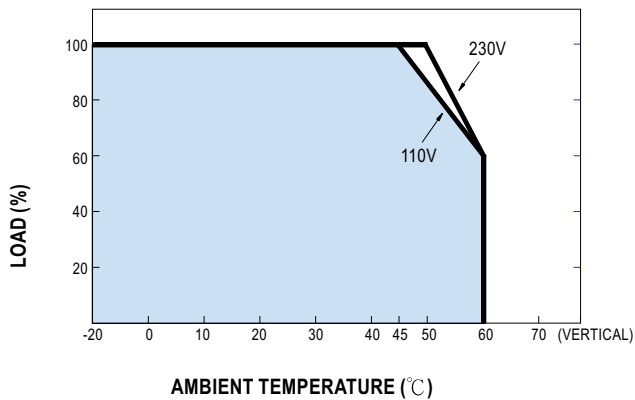

### Output Derating VS Input Voltage

